

EL1499IC

EL1499ICA

4" Low Voltage double wall IC housing with thermal protector. For use with insulated ceilings.




PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

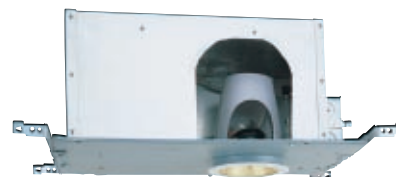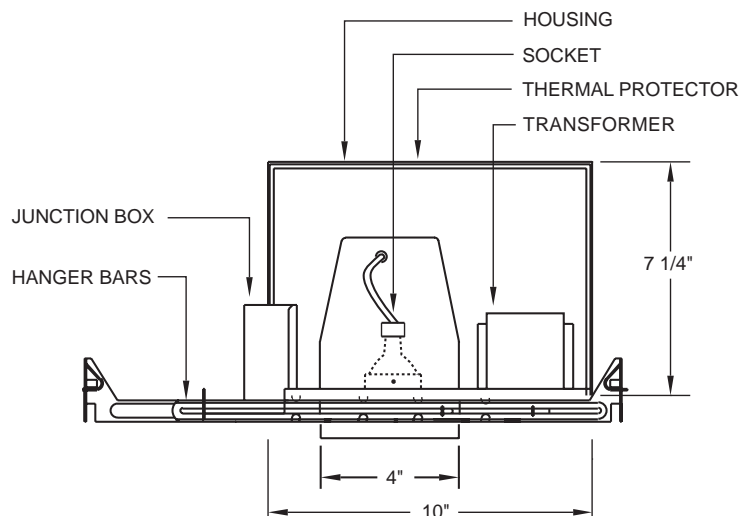

PLAN VIEW

PRODUCT SPECIFICATIONS

Housing Features: For use in insulated ceilings. Integral thermal protector guards against improper lamping. Double wall construction.

The EL1499ICA housing meets restricted air flow requirements.

Lamp: 12V, 50W Maximum; MR16.

Lamp Holder: MR16 Socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cutout.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) NO. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" joists and can be repositioned 90 degrees.

Mounting Frame: Stamped steel material and painted for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.
- U.L. listed for direct contact with insulation.

CATALOG NUMBER

Example: EL1499IC-EL1421C

See trims page for variety of trims available.