

INSTALLATION INSTRUCTIONS

For Outdoor Lantern

SPEC.NO: PL - 01

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT

Fia. 1

READ THESE INSTRUCTIONS CAREFULLY, AND KEEP THEM IN A SAFE PLACE FOR FUTURE REFERENCE.

TOOLS & MATERIAL REQUIRED

- Flat screwdriver
- Adjustable wrench
- Stepladder
- Wire cutters
- Wiring supplies, as required by the electrical code
- 1. Shut off the power at the fuse box or circuit breaker box and remove old fixture from ceiling, including the old crossbar.
- 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small parts necessary for installation.
- 3. Connect the wire from the fixture to the power supply wire from post.
- a) Twist together white wire from the fixture with white wire from post. Twist wire connector onto end of wires until snug.
- b) Twist together black wire from the fixture with black wire from post. Twist wire connector onto end of wires until snug.
- c) Twist together ground wire from the fixture with ground wire from post. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post
- 4. Fasten fixture base (G) onto post using three screws (H).
- 5. Install the 13-watt bulb with integrated ballast (C). DO NOT EXCEED SPECIFIED WATTAGE!
- 6. Place top cap (A) on to ring (D) of cage (F), Then tighten with screws (E).
- 7. Restore electric power, and test your new fixture.


When relamping, repeat step 5 with new integrated bulb/ballast


 $\label{listed self-ballast fluorescent} \begin{tabular}{ll} Combination. Please use UL and CUL & listed self-ballast fluorescent Lamp, certified by UL1993. \end{tabular}$

The fixture contains and integrated photocell sensor that automatically prevents operation during daylight hours.

This fixture is rated for a minimum start temperature of -18 Celsius. This fixture is UL Listed for Wet Location applications .

Note: Compact Fluorescent bulb contains Mercury. Dispose of according to local, State & Federal Law 1-800-555-5629 www.lamprecycle.org

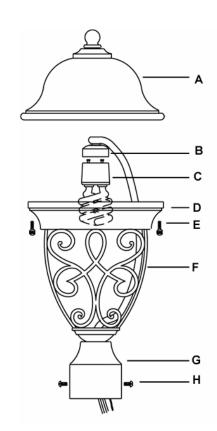



2 YEAR LIMITED WARRANTY

Golden Lighting offers a two-year limited warranty beginning on the date of the sales transaction. This warranty includes the repair or replacement of the fixture housing & casing and electrical components but is limited in that it does not cover the decorative finish or light bulb. For more information, or to report a claim, please contact Customer Service: CustService@goldenlighting.com or toll free 1-800-277-0979.