



Family: Ashbury | Item No. 4088 CM



Drawing 1 - Glass Installation

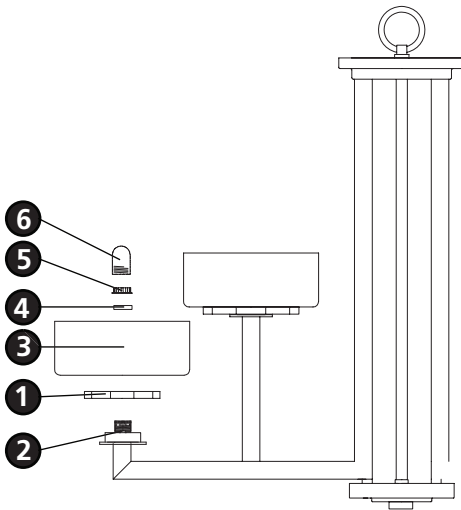

1

▼ start here

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first making all necessary electrical connections, hanging the fixture from the ceiling and then installing fixture glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet **(I.S.19)** provided to complete installation of this fixture.

2

1. To install glass, slip octagon crystal **(1)** over socket **(2)** - see **Drawing 1**.
2. Place glass **(3)** over exposed section of socket **(2)**.
3. Slip spacer **(4)** and thread socket ring **(5)** onto socket **(2)**.
4. Fixture can now be lamped accordingly.
5. Thread glass bulb shield **(6)** onto socket **(2)**.
6. Repeat steps 1-5 for remaining glass.

Note: Maximum wattage for 4088 fixture is 60 watts per G9 bulb.

12.29.08