




**Drawing 1 - Fixture Assembly**

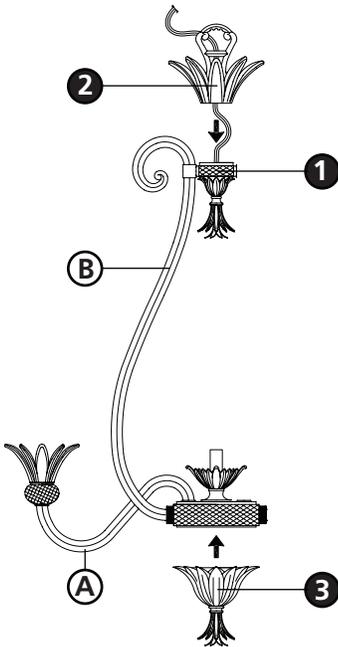

▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.


**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the fixture glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Slip top crown (2) along wire and thread into top of main body assembly (1) - see **Drawing 1**.
2. Spread arms (A) of the fixture until they are equally spaced apart and located in between the uprights (B).
3. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

**Drawing 2 - Glass Installation**

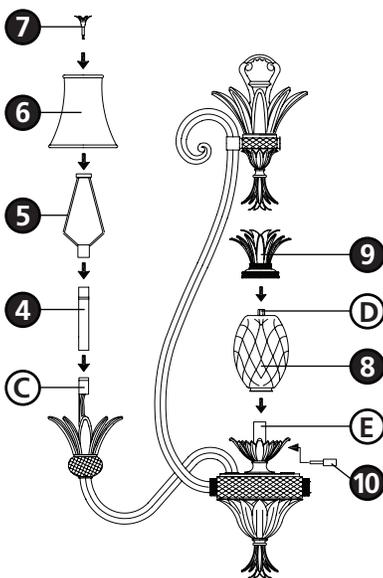

**3**

1. Slip candle sleeve (4) over socket (C) - see **Drawing 2**.
2. Slip harp (5) onto top of candle sleeve (4).
3. Attach shade (6) on the top of harp (5).
4. Thread finial (7) into top of harp (5) to secure shade (6).
5. To assemble center glass (8), take top crown assembly (9) and thread into coupler (D).
6. Attach center glass (8) to center bobesche (E) by threading in stud screws (10).  
Note: **DO NOT** use tools to tighten stud screws (10). Over tightening may cause glass damage.

Note: Maximum wattage for 4886 fixture is 60 watts per bulb.

2.7.08