



OAK TRAIL™  
ACCENT

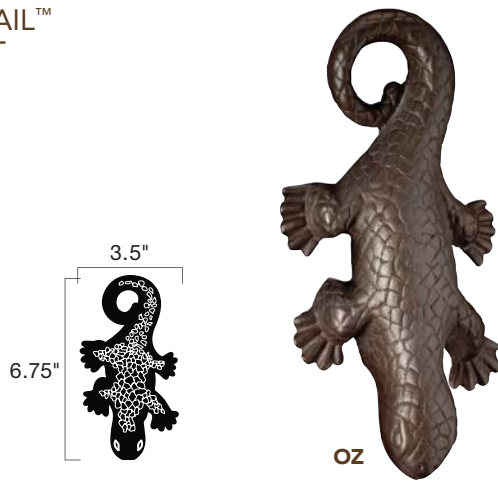

15047 OZ

ZEN GARDEN™  
DECK

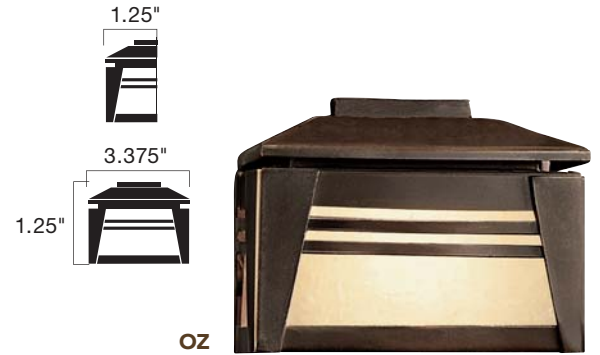

15110 OZ

Ordering Guide & Finish	15047 OZ	15110 OZ																																																																
Housing	Cast Brass	Brass with textured seedy linen glass																																																																
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket																																																																
Supplied Lamp	6.5-W(VA) 918X (17022) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)	6.5-W(VA) 901X (17021) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)																																																																
Incandescent Lamp Options	4-W(VA) 901X (17021)	6.5-W(VA) 918X (17022)																																																																
LED Lamp Options	N/A	N/A																																																																
Wiring	71" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	72" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																																																																
Mounting Access. (Included)	Stainless steel mounting bracket	Stainless steel mounting bracket																																																																
Notes	U.S. Patent No. D573,293. Brass will develop natural patina over time.	Coordinates with matching Bollard 15392 OZ and with matching Path light 15391 OZ on page 104. Brass will develop natural patina over time.																																																																
Photometric with Supplied Lamp	<table border="1"> <thead> <tr> <th>Mounting Height</th> <th>0'</th> <th>0.5'</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> </tr> </thead> <tbody> <tr> <td>6'</td> <td>3.6</td> <td>.25</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>12'</td> <td>2.1</td> <td>.76</td> <td>.15</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>30'</td> <td>1.26</td> <td>.76</td> <td>.1</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Mounting Height	0'	0.5'	1'	2'	3'	4'	5'	6'	3.6	.25	-	-	-	-	-	12'	2.1	.76	.15	-	-	-	-	30'	1.26	.76	.1	-	-	-	-	<table border="1"> <thead> <tr> <th>Mounting Height</th> <th>0'</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> </tr> </thead> <tbody> <tr> <td>6'</td> <td>26.53</td> <td>7.26</td> <td>1.33</td> <td>0.06</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>12'</td> <td>7.63</td> <td>4</td> <td>1.46</td> <td>.2</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>30'</td> <td>1.06</td> <td>.93</td> <td>.7</td> <td>.3</td> <td>0.03</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Mounting Height	0'	1'	2'	3'	4'	5'	6'	6'	26.53	7.26	1.33	0.06	-	-	-	12'	7.63	4	1.46	.2	-	-	-	30'	1.06	.93	.7	.3	0.03	-	-
	Mounting Height	0'	0.5'	1'	2'	3'	4'	5'																																																										
	6'	3.6	.25	-	-	-	-	-																																																										
12'	2.1	.76	.15	-	-	-	-																																																											
30'	1.26	.76	.1	-	-	-	-																																																											
Mounting Height	0'	1'	2'	3'	4'	5'	6'																																																											
6'	26.53	7.26	1.33	0.06	-	-	-																																																											
12'	7.63	4	1.46	.2	-	-	-																																																											
30'	1.06	.93	.7	.3	0.03	-	-																																																											