


12V LED/INCANDESCENT DECK & PATIO

FULL BACK MINI DECK

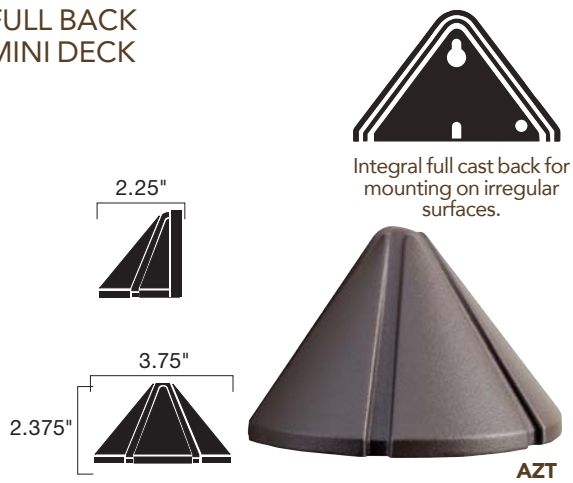

Integral full cast back for mounting on irregular surfaces.

AZT

MINI DECK



AZ

SOLID BRASS DECK



CBR

15045 AZT

15165 AZ

15477 CBR

Ordering Guide & Finish	15045 AZT	15165 AZ	15477 CBR	
Housing	Cast Aluminum	Durable thermoplastic composite resin, one-piece construction. Extremely resistant to impact, weather and the effects of UV.	Cast Brass	
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket	12V T5 wedge base socket	
Supplied Lamp	6.5-W(VA) 918X (17022) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)	6.5-W(VA) 918X (17023) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)	Lamp not supplied unless noted	
Incandescent Lamp Options	4-W(VA) 901X (17021)	4-W(VA) 901X (17021)	12V AC/DC input. Max:13W (VA) Type 912. See page 140.	
LED Lamp Options	2W (18039-18041) see page 137 Compares up to 16W Xenon Light distribution may be affected by location of sockets	2W (18039-18041) see page 137 Compares up to 16W Xenon Light distribution may be affected by location of sockets	2W T5 Side mount wedge base (18120-18121) see page 138 Compares up to 16W Xenon.	
Wiring	72" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	71" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	73" of usable #18-2, SPT-1-W leads. Cable connectors not included.	
Mounting Access. (Included)	N/A	Stainless Steel surface mounting bracket	Mounting hardware included 2 #8 screws	
Matching Outdoor Path Lights	15005, 15011, 15315, 15326, 15328			
Notes	N/A	N/A	Brass will develop natural patina over time	
Photometric with Supplied Lamp	Mounting Height	1' 2' 3' 4' 5' 6' 7'	Mounting Height	1' 2' 3' 4' 5' 6' 7'
	6'	2.8 .06 .03 - - - -	6'	1.9 0.3 - - - -
	12'	4.1 .73 .15 - - - -	12'	2.4 .4 - - - -
	30'	1.7 .87 .37 .1 - - - -	30'	.9 .4 .2 - - - -