

INSTALLATION INSTRUCTIONS

Item# P543-617

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Secure circular strap (E) to the outlet box with mounting screws (D) (Size: 0.16*0.63"). The side of the circular strap marked "GND" must face out.
4. Fasten rod (B) onto the lamp shade socket.
5. Test fit the fixture to the ceiling to determine the amount of electrical wire and support cable needed to achieve the desired hanging height. **DO NOT MAKE ANY ELECTRICAL CONNECTIONS AT THIS TIME.** Remember to leave extra electrical wire to allow for future counter-weight adjustment. Return the fixture to a clear flat surface.
6. Cut the excess electrical wire and pass it through the canopy (J). Secure the wire into the canopy with the strain relief provided.
7. To adjust the support cable, unscrew stopper (G), adjust the fixture to the desired length and re-fasten stopper (G).
8. While holding the counter-weight with one hand cut the support cable between the pulley and the counter-weight.
9. Cut away any excess support cable. Pass the newly cut end of the support cable through the stopper and ball (K). Secure the wire into stopper and ball (K) by using the allen screw and wrench provided. Insert the stopper and ball (K) into the counter-weight and re-fasten. The counter-weight may now hang freely.

CONNECTING THE WIRES (Fig. 1)

10. Connect the electrical wires as shown in Fig. 1, making sure that all wire connectors (F) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap or reinforcement plate using the green screw provided.

FINISHING THE INSTALLATION

11. Align canopy (J) to circular strap (E) and secure with screws (C) (Size: 1.57*5.51").
12. Install the light bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Align metal plate (H) to plastic diffuser (I) and center them onto the bottom of the lamp shade.
14. Use handle (A) to secure the diffuser (I) and metal plate (H) to the fixture body.

Your installation is now complete. Return power and test the fixture.


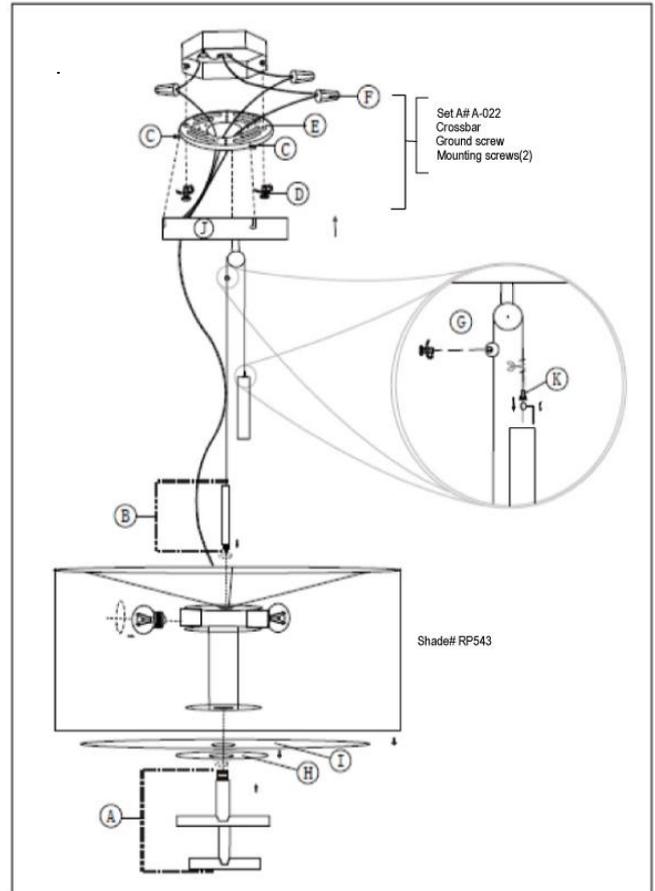


Fig. 1

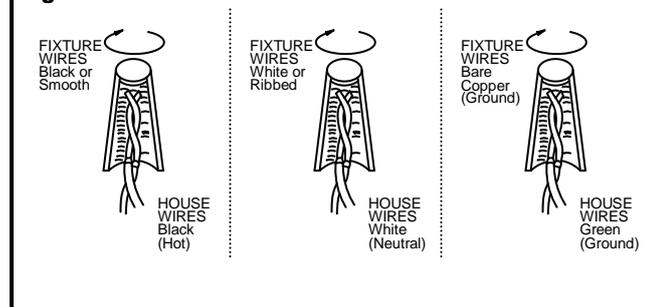

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.