



Catalog Number	
Notes	Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

### ATTRIBUTES

A distinctly attractive fixture that can be cable suspended or flush mounted. Available in a contemporary design perforated white aluminum diffuser for a soft non-glare ambient light. Unique step designed cast aluminum ends with brushed nickel finish. Matching finished finials provides easy access for cleaning and maintenance. Available in two sizes: 1'x2' or 1'x4'.

Utilizes(2) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.

All mounting hardware included.

### LISTING

CUL listed (standard) suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

### WARRANTY

Guaranteed for two years against mechanical defects in manufacture.


Indoor Decorative

# Metro

## Perforated Diffuser


### Linear Flush/Cable Mount

Linear T8 Fluorescent

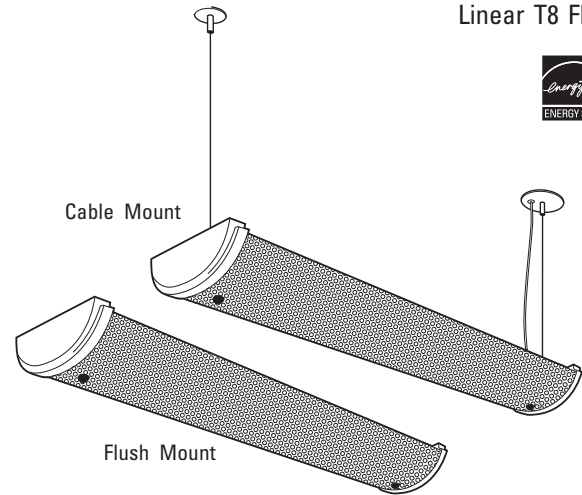

## DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1' x 2'		11722	(2) 17W Linear T8	7-7/8" (20.0)	24-1/2" (62.2)	3-5/8" (9.2)
1' x 4'		11742	(2) 32W Linear T8	7-7/8" (20.0)	48-1/2" (123.2)	3-5/8" (9.2)

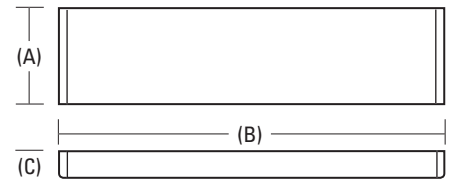

\* Flush mounting, extension from ceiling (cable suspension adjusts to 48" extension from ceiling, hangs level on sloped ceilings)

All dimensions are in inches (centimeters)

## ORDERING INFORMATION

Example: 11722RE

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number <sup>1,2</sup>	Residential Ballast <sup>3</sup>	Lamp <sup>4</sup>	Ballast/Voltage <sup>5</sup>	Options
<b>11722</b> 1'x2' - (2) 17W Linear T8 lamps	<b>RE</b> 120 volt residential electronic ballast (standard)	(blank) RE ballast fixtures only	(blank) RE ballast fixtures only	<b>GEB</b> Electronic ballast, <20%THD
<b>11742</b> 1'x4' - (2) 32W Linear T8 lamps	(blank) Other voltage and ballast types available (see ballast/voltage)	Non-RE ballast fixtures only	<b>MVOLT</b> Multi-volt	<b>GEB10IS</b> T8 electronic ballast, <10% THD, instant start
		<b>17</b> 17W T8 (2' fixtures only)	<b>120</b> 120 volt	<b>GEB10RS</b> T8 electronic ballast, 10% THD, rapid start
		<b>32</b> 32W T8 (4' fixtures only)	<b>277</b> 277 volt	<b>CSA</b> CSA certified <sup>9</sup>
			<b>347</b> 347 volt	Consult factory for other options and accessories
			Others available: consult factory	

### Notes:

- Lamps not included.
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on RE ballast fixtures.
- No designation for ballast/voltage type is required on RE ballast fixtures.

Accessories/Replacement parts	
<b>DMET2</b>	1' X 2' perforated diffuser
<b>DMET</b>	1' X 4' perforated diffuser

# Metro Linear Flush Mount

---

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.



**Consumer Products**

One Lithonia Way, Conyers, GA 30012

Phone: 800-748-5070 Fax: 770-860-3903

In Canada: 160 Avenue Labrosse, Point-Claire, P.Q., H9R 1A1

[www.lightahome.com](http://www.lightahome.com)