



Catalog Number	
Notes	Type


Indoor Decorative

Metro

Ribbed Diffuser

Linear Flush Mount

URBAN COLLECTION
Linear T8 Fluorescent

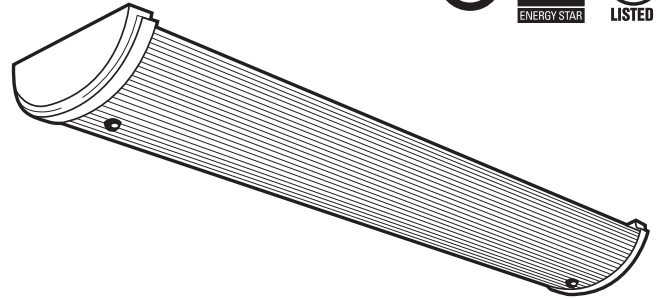

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

ATTRIBUTES

The definition of urban chic with the Metro high design contoured acrylic diffusers. Available in a sleek ribbed or etched, engraved geometric design. Both diffusers provide widespread uniform illumination. Durable die-cast aluminum ends in either a sleek brushed nickel or black bronze finish complement the diffuser's unique designs. Decorative matching finials provide easy access for cleaning and maintenance.

Utilizes (2) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.

LISTING


UL listed (standard) and CSA certified suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1'x2'		11726/11740	(2) 17W Linear T8	7-7/8" (20.0)	24-1/2" (62.2)	3-5/8" (9.0)
1'x4'		11746/11741	(2) 32W Linear T8	7-7/8" (20.0)	48-1/2" (123.2)	3-5/8" (9.0)

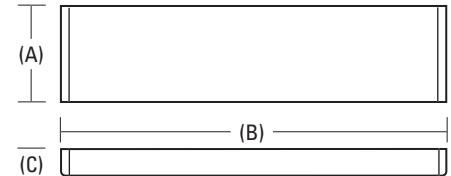

* Flush mounting, extension from ceiling.

All dimensions are in inches (centimeters)

ORDERING INFORMATION

Example: **11746 BN**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number ^{1,2}	Residential Ballast ³	Finish	Ballast/Voltage ⁵	Options
Ribbed Diffuser	RE 120 volt residential electronic ballast (standard)	BN Brushed nickel BZ Black bronze	(blank) RE ballast fixtures only MVOLT Multi-volt 120 120 volt 277 277 volt 347 347 volt	GEB Electronic ballast, <20%THD GEB10IS T8 electronic ballast, <10% THD, instant start GEB10RS T8 electronic ballast, 10% THD, rapid start CSA CSA certified
Etched Geometric Diffuser	(blank) Other voltage and ballast types available (see ballast/voltage)		Others available: consult factory	Consult factory for other options and accessories
11726 1'x2'-(2) 17W linear T8 lamps				
11746 1'x4'-(2) 32W linear T8 lamps				
11740 1'x2'-(2) 17W linear T8 lamps				
11741 1'x4'-(2) 32W linear T8 lamps				
Lamp⁴				
(blank) RE ballast fixtures only				
Non-RE ballast fixtures only				
17 17W T8 (2' fixtures only)				
32 32W T8 (4' fixtures only)				

Notes:

- Lamps not included.
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on ballast fixtures.
- No designation for ballast/voltage type is required on RE ballast fixtures.

Accessories/Replacement parts

CSS48	White cable suspension kit
CSS48 BZ	Bronze cable suspension kit

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.