



Compact Fluorescent

Alabaster Glass

Close-to-Ceiling


Energy Star

Type _____

-09STRWB -10STRWB

P3761
 P3762

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Brushed Nickel	Polished Brass		A	B
P3761	-09STRWB	-10STRWB	1-13w Quad 4 pin (Incl)	11-1/2	4-1/8
P3762	-09STRWB	-10STRWB	2-13w Quad 4 pin (Incl)	14	4-3/4

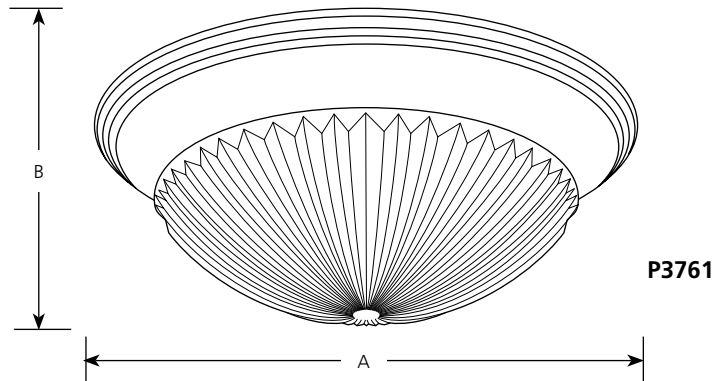

Specifications:

General

- Ribbed frosted glass
- Twist on and off glass bowl
 -P3761 glass 8-3/4" dia. x 3-1/4" ht.
 -P3762 glass 10-7/8" dia. x 3-3/4" ht.
- Units comply with Energy Star requirements
- Complete with 13 watt quad compact fluorescent lamps
- P3761 complies with "Americans with Disabilities Act" (ADA) – 4" maximum extension
- Plated finishes
- Steel construction

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
 -P3761: 11-1/2" dia. x 1-5/8" ht.
 -P3762: 14" dia. x 1-3/4" ht.
- Mounting strap for outlet box included

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 4-pin based sockets

Labeling

- UL-CUL damp location listed



Progress Lighting
 701 Millennium Blvd.
 Greenville, South Carolina
 29607

www.progresslighting.com