


Type \_\_\_\_\_  
P5-TG

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P5-TG	-00	1-26, 32, 42w Triple CF (4-pin)	7-5/8	4-7/8	3-1/2

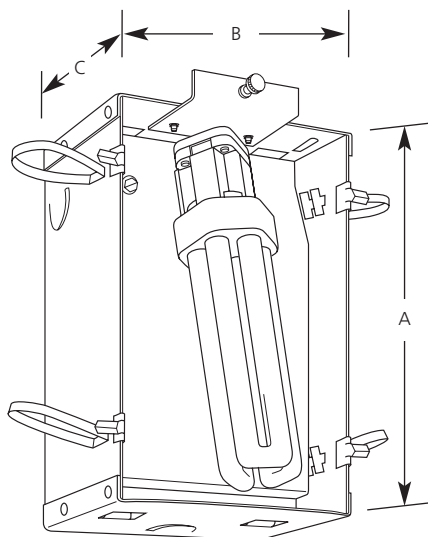

**Specifications:**

General

- Recessed wall box
- Steel construction
- Powder coat white finish
- Thumbscrew retains diffuser
- IC rated for direct contact with insulation
- For new construction or remodel
- Electronic HPF ballast
- 120V to 277V ballast
- For horizontal or vertical mount wall pockets
- Uses 26w, 32w or 42w Triple tube compact fluorescent lamps

- Four mounting springs provided for remodel work
- Four trim clips included for remodel work
- Mounting slots for attachment to wall studs new construction
- For center mounting between studs order P8716-01 mounting bars

Electrical

- Electronic HPF 120V to 277V ballast
- GX24q-4 base socket
- Grounded pigtail provided
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Recessed wall box
- Fully enclosed wiring compartment
- 1/2" KO's in top, side and end of wiring compartment

Progress Lighting  
Post Office Box 5704  
Spartanburg, South Carolina  
29304-5704