


Type _____
-47
P7152 ☐

Catalog No.	Finish Sandstone & White Acrylic	Application	Dimensions (Inches)			
			A	B	C	D
P7152	-47	Use with wall box or back plate	19	9-1/2	2-3/8	4

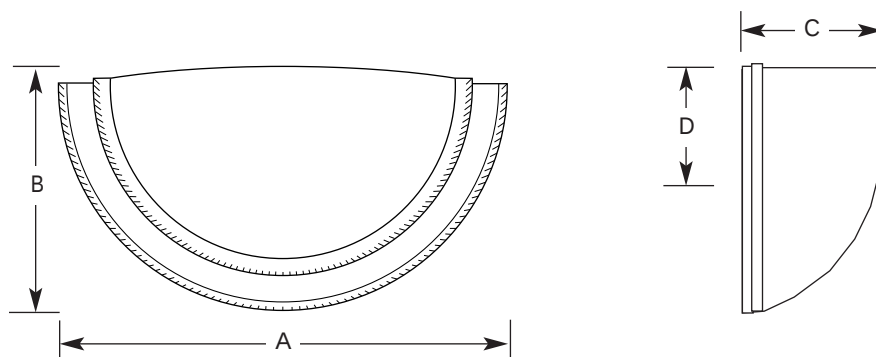

Specifications:

General

- White acrylic wall pocket
- Sandstone decorative banding
- Direct-indirect illumination
- Complies with Americans with Disabilities Act
- Locks in place for safety
- Interchangeable with other wall pockets diffusers

Mounting

- Wall mounted
- Horizontal mounting
- Must be used with wall box or back plate. See P3TG, P4TG or P7200-30.

Electrical

- Refer to wall box or back plate

P5 / P7152-47

Report No. 99104


No. Lamps: 1 Type Lamp: CF26 TRIPLE SYLVANIA Total Lumens: 1800

Fixture Efficiency: 63.6%

S/MH Ratio: 2.1

DISTRIBUTION CURVE

INTENSITY DATA

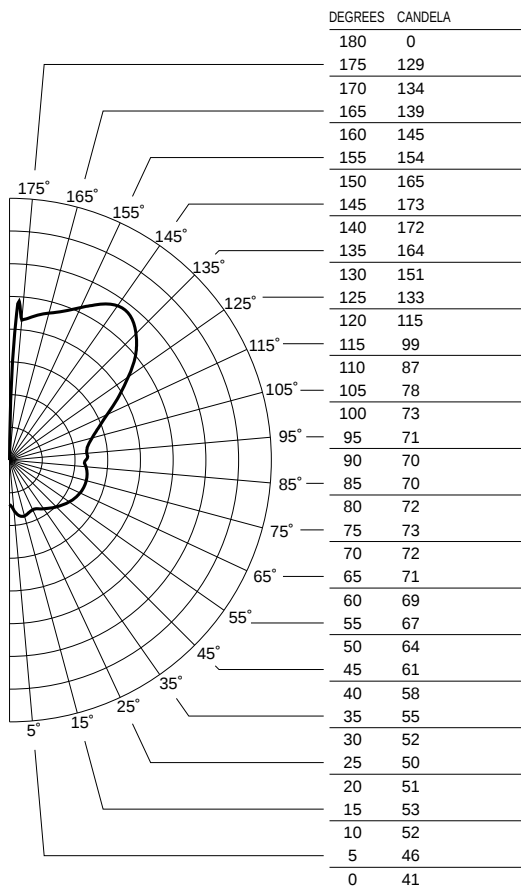

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20																					
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
0	66	66	66	66	60	60	60	60	48	48	48	37	37	37	27	27	27	23			
1	58	54	51	48	52	49	46	44	39	37	35	29	28	27	21	20	19	15			
2	52	46	42	38	46	42	38	34	33	30	27	25	22	21	17	16	14	11			
3	47	40	35	30	42	36	31	27	28	25	22	21	19	16	14	13	11	8			
4	43	35	29	25	38	31	26	23	25	21	18	18	16	13	13	11	9	6			
5	39	31	25	21	35	28	23	19	22	18	15	16	13	11	11	9	8	5			
6	36	27	22	18	32	25	20	16	19	16	13	14	12	10	10	8	6	4			
7	33	24	19	15	29	22	17	14	17	14	11	13	10	8	9	7	6	4			
8	30	22	17	13	27	20	15	12	16	12	10	12	9	7	8	6	5	3			
9	28	20	15	12	25	18	14	11	14	11	8	11	8	6	7	6	4	3			
10	26	18	13	10	23	16	12	9	13	10	7	10	7	6	7	5	4	2			

P3-EM / P7152-47

WALL SCONCE EMERGENCY LIGHTING



Report No. 2002303

No. Lamps: 1 Type Lamp: CF13 TWIN SYLVANIA Total Lumens: 650

Fixture Efficiency: 60.0%


S/MH Ratio: 2.2

Quick Calculator Charts

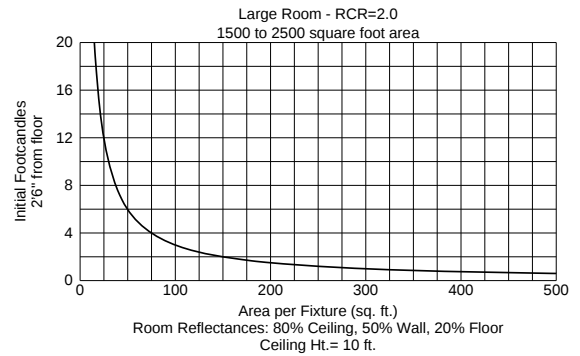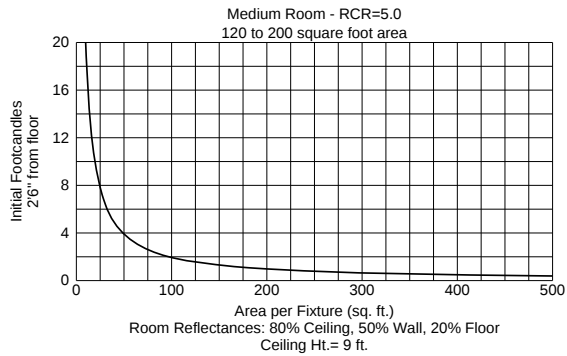

DISTRIBUTION CURVE

INTENSITY DATA

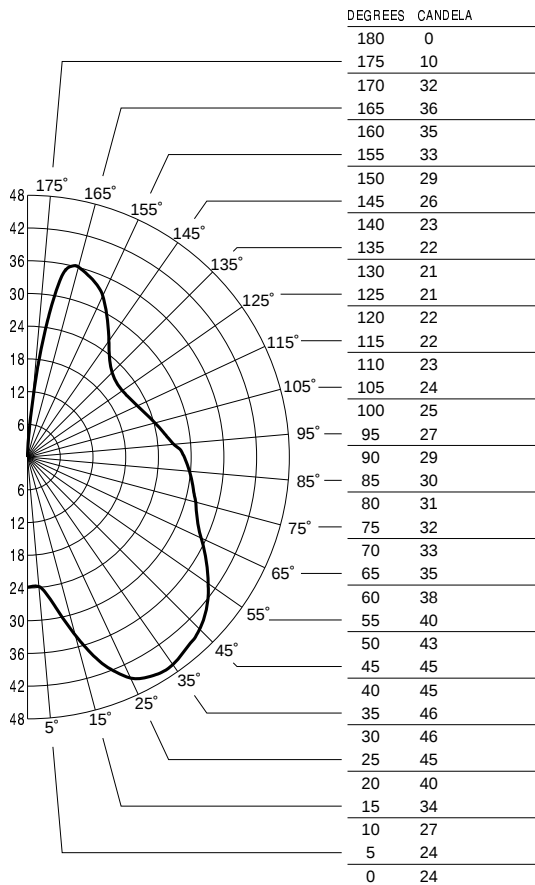

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 132°			Beam Angle - 99°	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.1	25	0.8	0.4	13
10	0.0	34	0.4	0.2	17
12	0.0	42	0.3	0.1	22
14	0.0	51	0.2	0.1	27
16	0.0	60	0.1	0.1	31

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20																						
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
0	66	66	66	66	62	62	62	62	53	53	53	46	46	46	39	39	39	36				
1	58	54	51	48	54	50	47	45	43	41	39	37	35	33	31	29	28	25				
2	52	46	41	37	48	43	38	35	37	33	30	31	28	26	26	24	22	19				
3	46	40	34	30	43	37	32	28	31	28	24	27	24	21	22	20	18	15				
4	42	34	29	25	39	32	27	23	27	23	20	23	20	17	19	17	15	12				
5	38	30	25	21	35	28	23	19	24	20	17	21	17	15	17	14	12	10				
6	35	27	21	17	33	25	20	16	22	17	14	18	15	12	15	13	10	9				
7	32	24	19	15	30	23	18	14	19	15	12	16	13	11	14	11	9	7				
8	30	22	17	13	28	20	16	12	18	14	11	15	12	9	13	10	8	6				
9	28	20	15	11	26	18	14	11	16	12	10	14	10	8	11	9	7	6				
10	26	18	13	10	24	17	13	10	15	11	8	13	9	7	11	8	6	5				