


COLOR CRYSTAL – model: DR-G352

Crystal Collection: Beauty Spots™

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Beauty Spots™ series are low voltage surface mount fixtures designed for use in drywall ceilings, grid ceilings, walls, or displays. Clear shades fit over the lamp and are retained by a spring band.

FEATURES

- For use with LED canopy **DR-LED302-30-CH** or Xenon canopy **DR-301** (order separately)
- Use 12V/24V remote electronic or magnetic transformer (order separately) see next pages for complete transformer spec.
- Easily mounted on suspended or finished ceilings.
- Can be used individually as accent pieces or grouped together.
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Canopy faceplate is plated chrome. Wiring compartment is steel, painted black.

Light Source: LED 4.3W or Xenon Bi-Pin 20W with canopy.


Mounting: No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface. 2 3/8" cut out hole.

Mounting: Integral wiring compartment with standard size knock out hole on top. When using a class II power supply, side hole may be used for wire entry

Standards: UL & CUL Listed.

COMPATIBLE CANOPY

Source	Model #	Finish	Watt	Cutout	Color Temp	Lumens
LED	DR-LED302-30	CH Chrome	4.3W	2 3/8"	3000K	145
Xenon Bi-Pin	DR-301	CH Chrome	20W	2 3/8"	2700K	



- **CH**


Example: **DR-LED302-30-CH**

ORDER NUMBER

Model #	Color
DR-G352	AM Amber
	BL Blue
	CL Clear
	RD Red

DR-G352 -

Example: **DR-G352-RD**

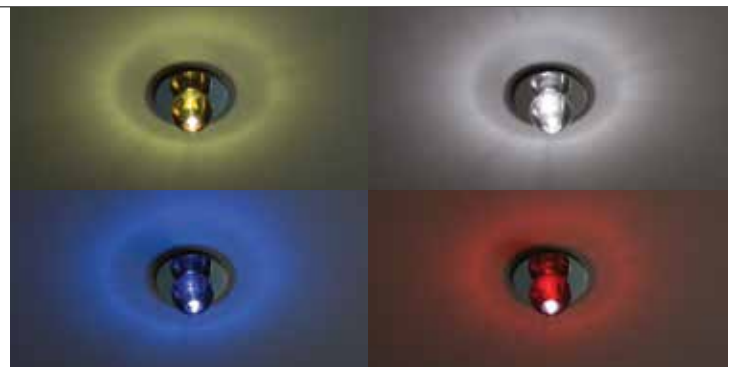

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

COLOR CRYSTAL – model: DR-G352

Beauty Spots™ Transformers

WAC LIGHTING

Responsible Lighting®

		Input	Output	Min Load	Dimension (L x W x H)	Max Fixture Run	Max Run Length
<i>Integral LED Canopy (Order with DR-LED302-30-CH)</i>	EN-2460-RB2	120V	24V, 60W (class 2)	1W	6½" x 1⅝" x 1¼"	12	30'
	EN-24100-RB2	120V	24V, 96W (class 2)	1W	6½" x 1⅝" x 1¼"	21	40'
<i>Xenon Bi-pin Canopy (Order with DR-301-CH)</i>	EN-1260-RB2	120V	12V, 60W (class 2)	1W	6½" x 1⅝" x 1⅛"	3	25'
	EN-1275-RB-AR	120V	12V, 75W	1W	6½" x 1⅝" x 1⅛"	3	30'
	EN-12100-RB-AR	120V	12V, 100W	1W	6¼" x 3" x 1⅝"	5	30'
	EN-12150-RB-AR	120V	12V, 150W	1W	6¼" x 3" x 1⅝"	7	35'



WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 S Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585