


Foldaway Fittings

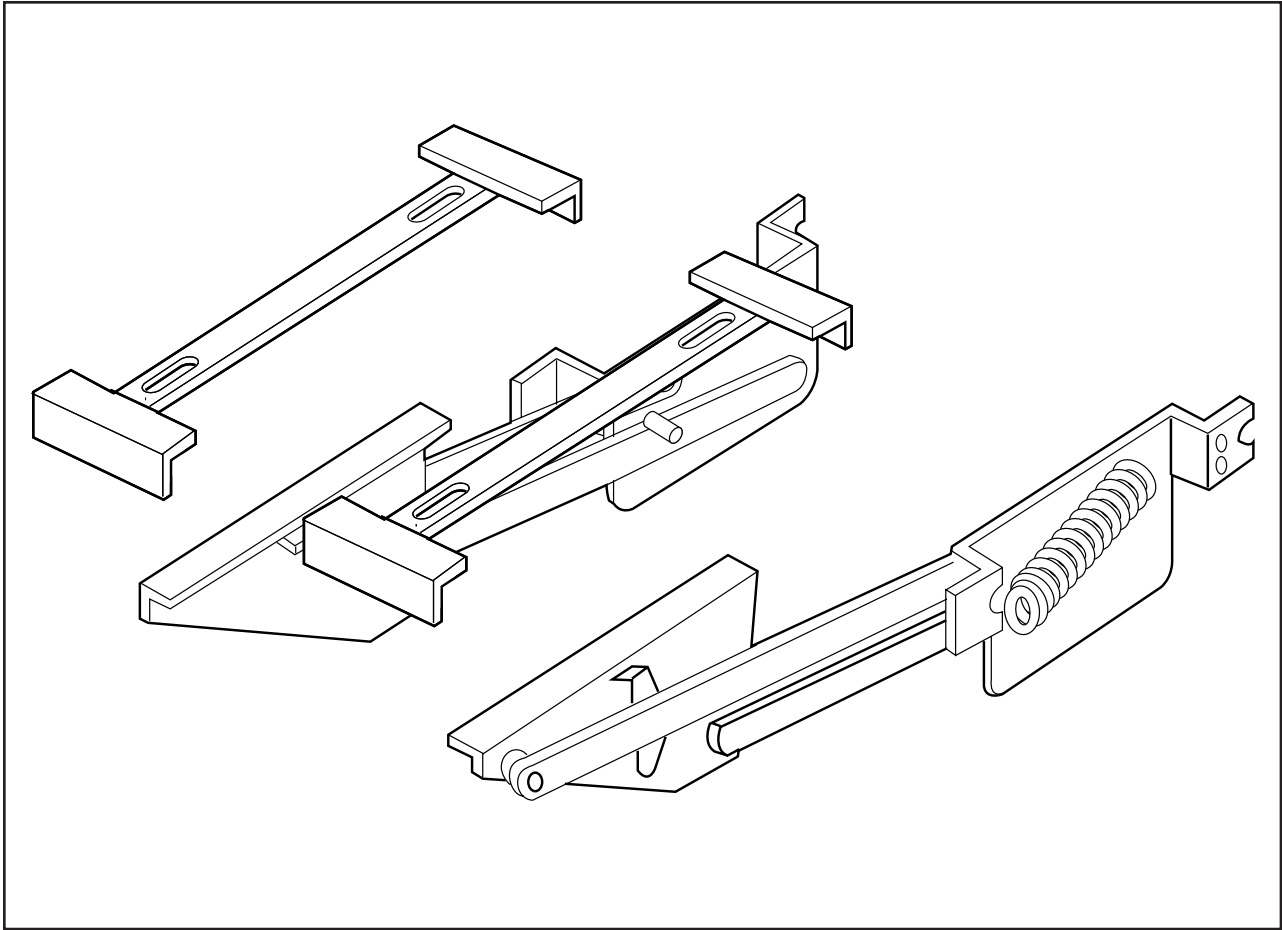

Catalog No.

Minimum Inside Cabinet Height ( swing arc )  
Minimum Inside Cabinet Depth  
Inside Cabinet Width  
Shelf Width  
Shelf Depth  
Load Capacity

504.24.710	504.24.701
470 mm (18 ½")	570 mm (22 ½")
450 mm (17 ¼")	500 mm (19 ¼")
300 mm (11 ⅞") to 600 mm (23 ⅝")	
Inside dimensions minus 70 mm (2 ¾")	
420 mm (16 ½") is recommended	
12 kg (26 lbs)	


**Dimensions for: 504.24.710**

**Stowage Dimensions**

**Maximum Height = 305mm (12").**

Because of swing arc a 305mm high object can only be 292mm (11 1/2") deep to clear front of cabinet.

**Maximum Depth = 406mm (16").** Because of swing arc a 406mm deep object can only be 202mm (8") high in order to clear front of cabinet.

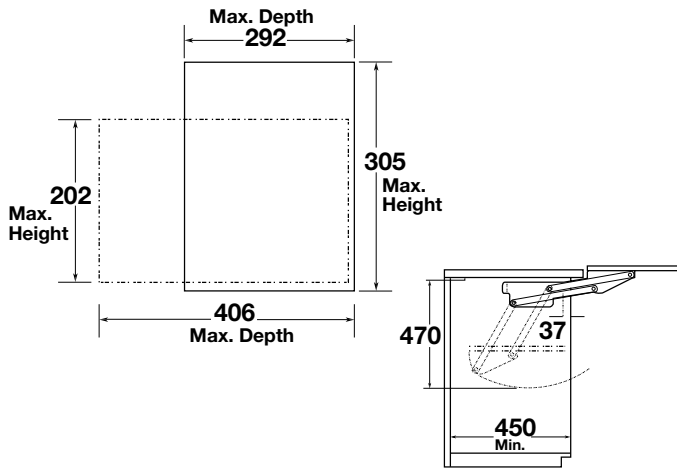


**Dimensions for: 504.24.701**

**Stowage Dimensions**

**Maximum Height = 394mm (15 1/2").**


Because of swing arc a 394mm high object can only be 336mm (13 1/4") deep to clear front of cabinet.

**Maximum Depth = 406mm (16").** Because of swing arc a 406mm deep object can only be 342mm (13 1/2") high in order to clear front of cabinet.

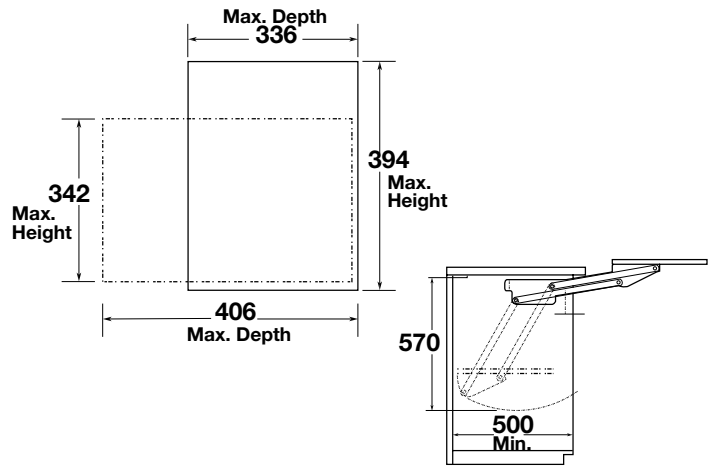

**PARTS LIST**

- 1 Pair of Carrying Arms, left and right
- 2 Locking Devices
- 4 Plastic Distance Washers
- 4 Plastic Appliance Spacers (7mm High)

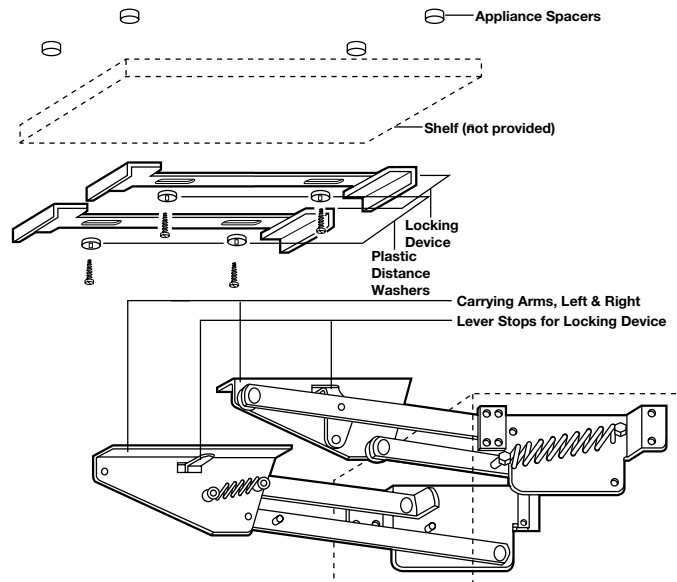

**1. Mount Carrying Arms**

Attach carrying arms per drawing ①. (Recommended screws-#4 x 17(8x5/8"))

**Note:** Carrying arms may have to be blocked out to assure clearance of European hinges, or face frames.

**2. Mount Shelf (Provided by end user)**

(Length x width depends on dimensions of cabinet) Screw shelf to carrying arms being sure shelf is flush with back edge and sides of carrying arms. (Recommended screws #4 x 17 (8 x 5/8").


**3. Locking Device**

Position locking devices left and right underneath shelf in such a way that the lever stops are engaged. Be sure to fit the plastic distance washers to achieve smooth movement of locking device. (Recommended screws #3.5 x 17 (6 x 5/8").

-For mounting of appliances, 4 distance spacers (7mm height) are supplied together with fitting.


-For additional support a traverse can be added. See diagram ②.

504.24.710

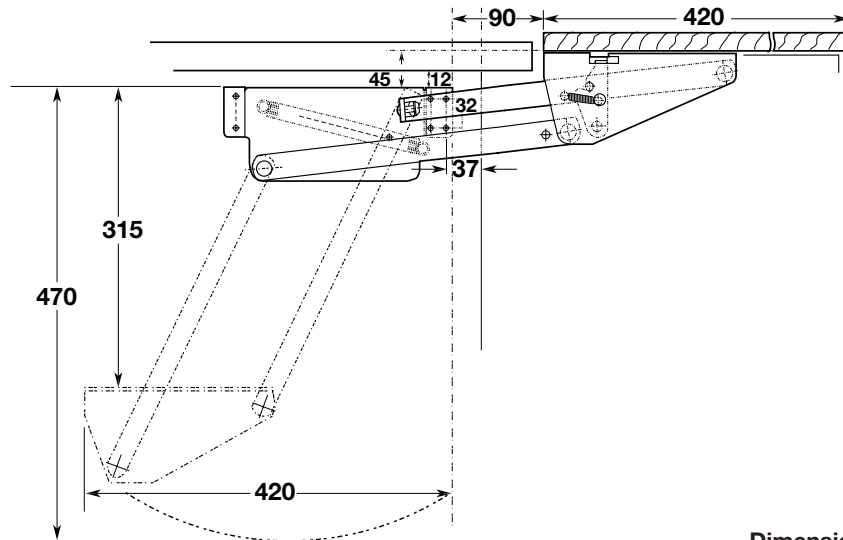


Dimensions in mm

504.24.701

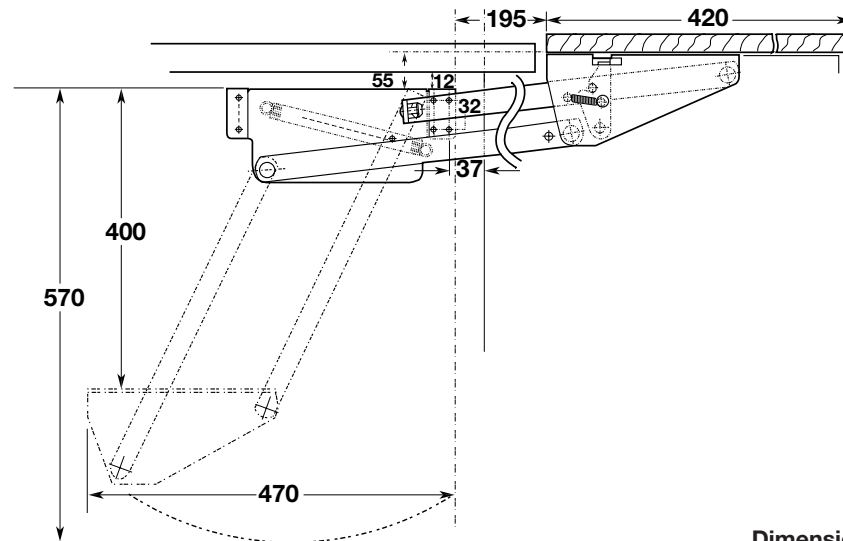

Dimensions in mm

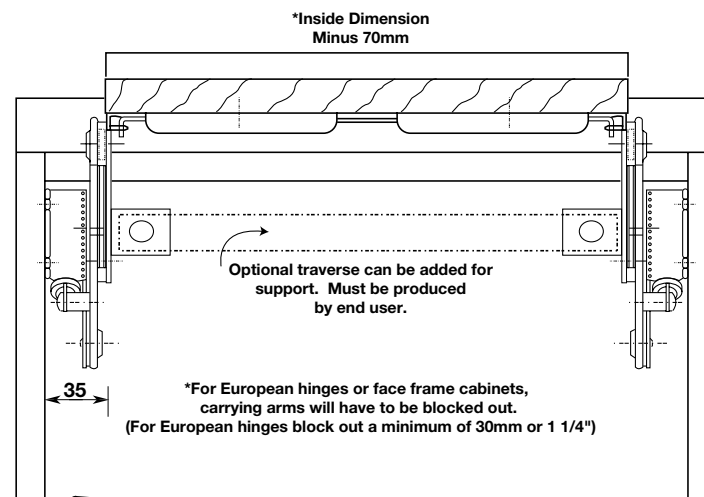

Dimensions in mm

**HÄFELE**

3901 Cheyenne Drive

P.O. Box 4000

Archdale, NC 27263

**1-800-423-3531**

**www.hafele.com**