



24 INCH VENTLESS HEAT PUMP DRYER

DHP24404W





| | GENERAL |
|---|--|
| Dryer Type | Heat pump ventless |
| Capacity cu. ft. | 4.5 |
| Dry load capacity kg | 8.0 |
| Dry load capacity lbs. | 17.7 |
| Drum material | Stainless steel |
| Control | Digital Display |
| Silence level dBA | 66 |
| Automatic water drain | Yes |
| Delay Time | 0-24 h |
| | CYCLES |
| Number of Cycles | 15 |
| Normal / Regular cotton | Yes |
| Permanent press | Yes |
| Mixed fabric | No |
| Delicates | Yes |
| Bulky / Large Items | Yes |
| Air Fluff / no heat | Yes |
| Jeans | Yes |
| Baby sanitize | Yes |
| Silent Program | Yes |
| Fitness Wear | Yes |
| Quick Dry 30' | Yes |
| Timed Dry | Yes |
| Download Cycle | Yes |
| Gentle Care | Yes |
| Easy Iron | Yes |
| , | FUNCTIONS |
| End of cycle buzzer | Yes |
| Child lock | Yes |
| Automatic easy ironing | Yes |
| Interior drum led lighting | No |
| | |
| Glass door with heat protection | Yes |
| Glass door with heat protection Reversible glass door | Yes Yes |
| Reversible glass door | |
| Reversible glass door Program follower | Yes |
| Reversible glass door Program follower Leveling legs | Yes Yes 4 |
| Reversible glass door Program follower Leveling legs Clean filter indicator | Yes Yes 4 Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action | Yes Yes 4 Yes Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase | Yes Yes 4 Yes Yes Yes Yes Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase | Yes Yes 4 Yes Yes Yes Yes Yes AND FINISHES |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet | Yes Yes 4 Yes Yes Yes Yes Yes White |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim | Yes Yes 4 Yes Yes Yes Yes Yes White White |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver DIMENSIONS |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver DIMENSIONS 33 5/16" x 23 5/8" x 27 1/2" |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver DIMENSIONS 33 5/16" x 23 5/8" x 27 1/2" 84.6 x 60 x 62.2 |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Umensions (HxWxD) cm Product Weight kg | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver DIMENSIONS 33 5/16" x 23 5/8" x 27 1/2" 84.6 x 60 x 62.2 59 |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. | Yes Yes 4 Yes Yes Yes Yes Yes White White Sliver DIMENSIONS 33 5/16" x 23 5/8" x 27 1/2" 84.6 x 60 x 62.2 59 122 |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps | Yes Yes Yes 4 Yes Yes Yes Yes Yes Yes White White Sliver DIMENSIONS 33 5/16" x 23 5/8" x 27 1/2" 84.6 x 60 x 62.2 59 122 CHNICAL FEATURES 4 208-240V / 60Hz 10 |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO Energy star qualified | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO Energy star qualified Energy consumption, kWh/year | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO Energy star qualified Energy consumption, kWh/year UL listed | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO Energy star qualified Energy consumption, kWh/year | Yes |
| Reversible glass door Program follower Leveling legs Clean filter indicator Bi-directional drum action Auto cool-down phase MATE Cabinet Door rim Cycle selector knob Product Dimensions (HxWxD) in Product Dimensions (HxWxD) cm Product Weight kg Product Weight lbs. TEC Rated Current Amps Voltage/ Frequency Rated Current Amps ENVIRO Energy star qualified Energy consumption, kWh/year UL listed | Yes |








24 INCH VENTLESS HEAT PUMP DRYER


DHP24404W

Dimensions and Installation

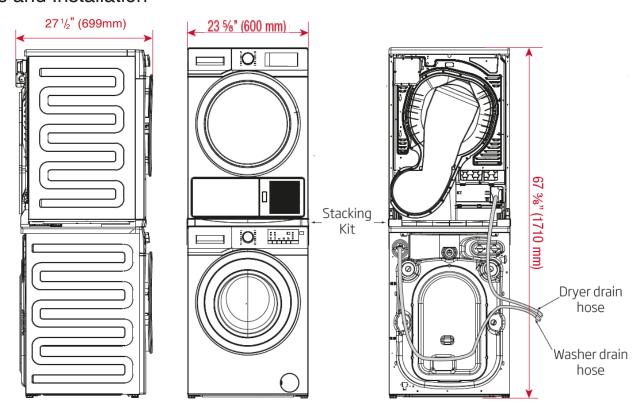

Stacked installation minimum air gap clearances:

6 1/4" top, 1/2" sides, 1/2" back, front 1/2"

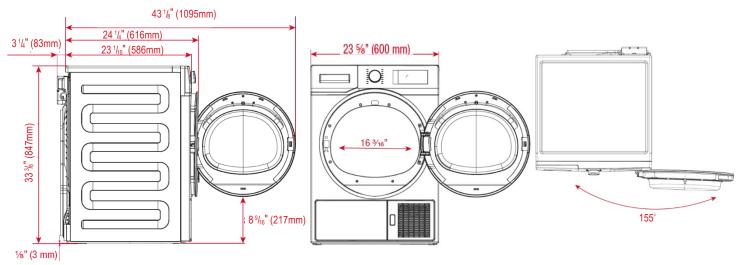

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.com or call 888-352-2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

