



Electrolux

ICON

Built-In Dishwasher

professional series

E24ID75SPS



PRODUCT DIMENSIONS

Height	33-3/4" – 35-3/4"
Width	23-3/4"
Depth	24-1/4"

MORE EASY-TO-USE FEATURES

Third-Level Rack Provides More Space for Utensils

Serving utensils and culinary tools are always party-ready with our removable Third-Level Rack, which allows for the perfect organization and clean.

Sure-2-Fit® Racks Adjust with Ease

Find the perfect place for every platter and pitcher with our adjustable Sure-2-Fit® racking system.

ENERGY STAR®-Certified

Our products are rigorously tested to meet strict energy guidelines.

Clean Light Shines When Dishes are Ready

A soft light shines on the floor when the cycle ends to let you know that your dishes are clean.

Put Your Stemware in Its Place

Perfect Stemware™ grips gently hold delicate items in place for a sparkling clean.

Sanitize Option

Certified to remove 99.9% of common household bacteria.

Perfect Stemware™ Cycle

For sparkling stemware that is ready for entertaining.

Leak-Detection System

Detects water leaks and immediately stops and drains the dishwasher while alerting you on the control panel.

Signature Features



Perfect Dry™ System Ensures a Brilliant Dry

Enjoy brilliant drying with our Perfect Dry™ System, which circulates air evenly for a complete dry.¹



30-Minute Clean Leaves Dishes Sparkling

Dishes come out sparkling between courses with our thorough 30-Minute Clean.



LuxCare™ Wash Arm Uses Water More Effectively for an Effortless Clean

Your dirtiest dishes don't stand a chance with our innovative rotating LuxCare™ Wash Arm, which makes better use of your water for an effective clean.



Effortlessly Clean Hard-to-Reach Corners with Target Wash Zones

Take aim — special nozzles deliver a targeted wash to clean all sizes and shapes of dishes that need a little extra attention.

¹Using Max Dry option.

BUILT-IN DISHWASHER

FEATURES

Stainless Steel Interior	Yes
Luxury-Hold™ Door	Yes
Custom-Set™ Options	Yes
Theatre LED Lighting	Yes
Integrated IQ-Touch™ Controls	Yes
LED Indicator Lights	Yes
Tall-Tub Design	Yes
ProClean™ Wash System	Direct Feed
LuxCare™ Wash Arm	Yes
Luxury-Clean™ Technology	Yes
Luxury-Quiet™ Sound Package/(Approx. dBA)	Yes/45.0
Wash Levels	5
Aqua-Lux™ Wash System	Yes
Leak-Detection System	Yes
Adjustable Rinse Aid Dispenser with Indicator	Yes
ENERGY STAR®	Yes

CYCLES

Auto Wash	Yes
Delicate	
Eco Wash	Yes
Favorite	Yes
Heavy	Yes
Normal	Yes
Perfect Stemware™	Yes
30-Min. Fast Wash	Yes
Rinse Only	Yes
Upper Rack	Yes

OPTIONS

Hi-Temp. Wash	Yes
Air Dry	Yes
Max Dry	Yes
Sanitize Option	Yes
Delay Start	1-24 Hrs.

RACK SYSTEM

Sure-2-Fit® Rack System	Yes
Upper Rack –	
Adjustable Height	Yes
Cup Clips	Yes
Cup Shelf/Stemware Holder	2/Yes
Fold-Down Tines	4 Rows
Rack Handle	Yes
Versa-Tray™	Yes
Lower Rack –	
Fold-Down Tines	4
Knife Holder	
Utility Tray/Shelf	Yes
Stemware/Champagne Glass Holders	6
Silverware Basket	3-Piece Split
Special Items Cover	3
Third-Level Rack (Single Tray)	Yes



SPECIFICATIONS

Power Supply Connection Location	Right Bottom Front
Water Inlet Location	Left Bottom Front
Leveling Legs	Yes
Water Usage (Gallons) – Normal Cycle	4.0 – 8.0
Water Pressure (PSI)	15 – 120
Integral Air Gap on Supply	Yes
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts†	1.44
Amps @ 120 Volts	15
Shipping Weight (Approx.)	115 Lbs.

†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

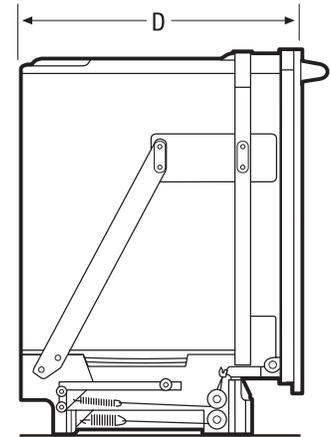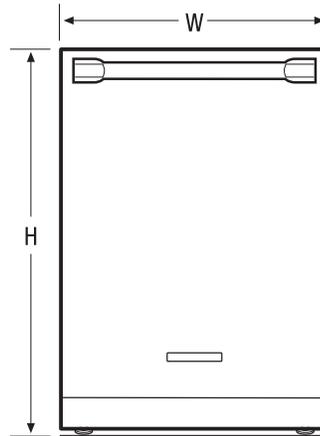

PRODUCT DIMENSIONS


Height (Adjustable)	33-3/4" – 35-3/4"
Width	23-3/4"
Depth (Including Door) (with Door 90° Open)	24-1/4" 50-1/4"

Electrolux Major Appliances, N.A.


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxicon.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxicon.ca



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

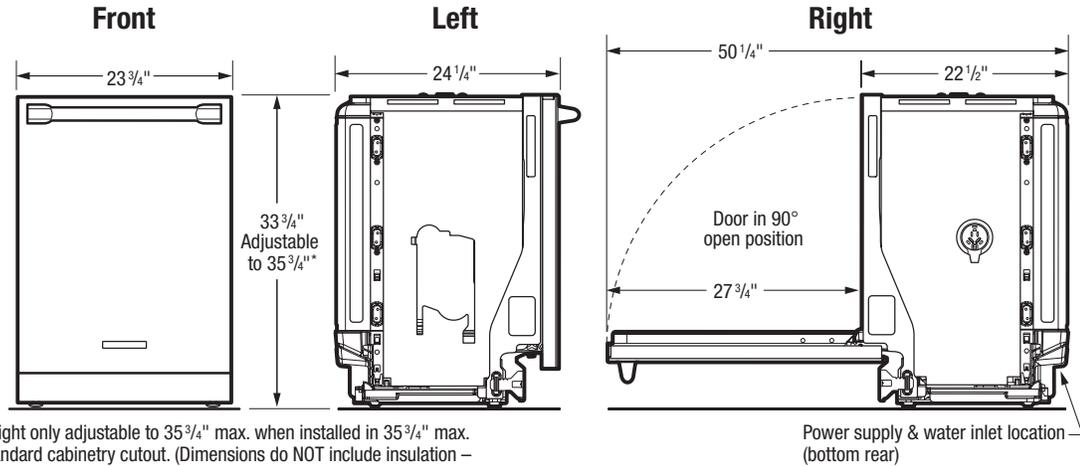

*Height only adjustable to 35 3/4" max. when installed in 35 3/4" max. standard cabinetry cutout. (Dimensions do NOT include insulation – insulation blanket may be compressed during installation.)

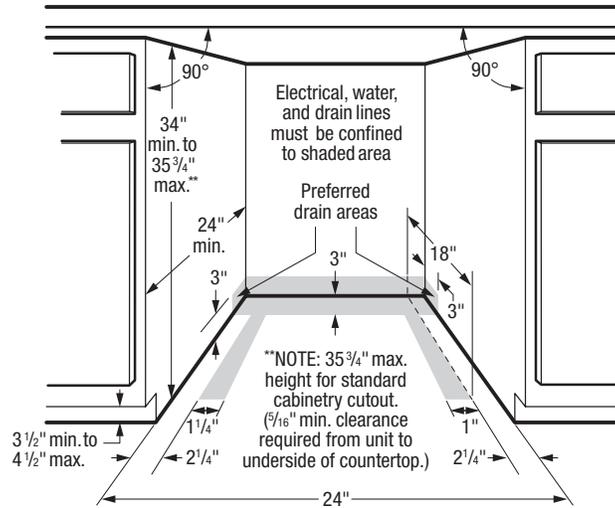

Built-In Dishwasher Specifications

- Product Weight – 98 Lbs.
- Voltage Rating – 120V/60Hz
- Connected Load (kW Rating) @ 120 Volts = 1.44 kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 9.0 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006.
- Water Pressure – Hot water line to dishwasher must provide between 15 and 120 pounds per square inch (psi) with at least 120° F hot water temperature.
- Make sure location has correct drain, water and electrical outlets to make connections.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Keep back free of drain, water & electrical supply.
- Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame.
- If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- Leveling legs supplied to adjust height. (Note: Height only adjustable to 35-3/4" max. when installed in 35-3/4" max. standard cabinetry cutout. 5/16" min. clearance required from top of unit to underside of countertop. Dimensions do NOT include insulation — insulation blanket may be compressed during installation.)
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- Floor should be flat and free of obstructions.
- When installing at end of cabinet line, sides and back must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.
- Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moisture-proof polyurethane to prevent possible steam/moisture damage.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxicon.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxicon.ca

