

Gas Countertop Charbroilers

Globe Countertop GAS Equipment

Models

Radiant Heat Charbroilers

Stainless Steel Radiants

□GCB15G-SR □GCB36G-SR

□GCB24G-SR □GCB48G-SR



□GCB15G-CR □GCB36G-CR

□GCB24G-CR □GCB48G-CR





Char Rock Charbroilers

□GCB15G-RK □GCB36G-RK

□GCB24G-RK □GCB48G-RK

Radiant or Char Rock heating available in 15", 24", 36", 48" widths

Quality Construction

- Stainless steel, double wall construction. front, sides and back, and extended cool-to-touch front edge
- Heavy duty, reversible cast iron grates with drip flavor edge
- · Heavy duty cast iron char rock grid standard on char rock models
- Radiant covers available in stainless steel or heavy duty cast iron on radiant charbroiler models
- · Adjustable 4" stainless steel legs

Standard Features

- High performance 40,000 BTU per burner
- Stainless steel U-style burners provide flame every 6"
- Individual adjustable pilot for each burner with easy front panel access
- Versatile grate position, angled or flat
- Field convertible to radiant, char rock, or combination
- Unit ships Natural Gas with LP conversion kit included

Standard Accessories

LP Conversion Kit

Optional Attachments/Accessories

Date:

Replacement radiant and rock kits are available. Contact Globe for these items.

One-year parts and labor

Approved By:_	
, _	




GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147



Gas Countertop 15", 24", 36" & 48" Charbroilers

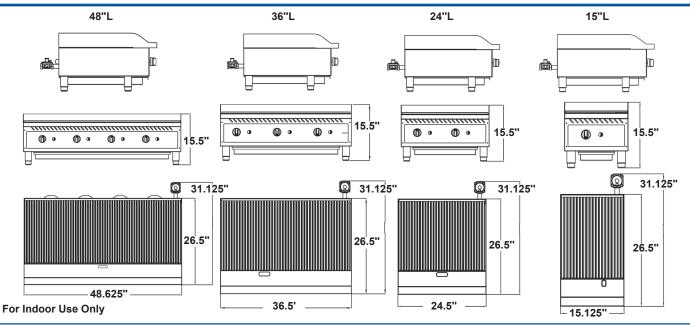

STANDARD FEATURES:


- · All stainless steel construction
- Cast iron cooking racks
- · LP conversion kit
- Regulator
- · Full-width catch tray
- 40,000 BTUs per burner.
 (One U-style burner) provides flame every 6".
- Heavy-duty cast iron grates with adjustable pilots and front access.

OPTIONS:



Radiant Heat

Stainless steel burner covers (-SR) Cast iron burner covers (-CR)



Char Rock

Char rock cast iron grids (-RK)

SPECIFICATIONS

GAS REQUIREMENTS & INFORMATION:

- · Natural Gas or Liquid Propane Gas main supply required.
- All units ship Natural Gas ready. Liquid Propane conversion kit is included for kitchens equipped with this gas type. Conversion of your unit from Natural Gas to LP must be completed by an authorized Globe servicer.
- 3/4" standard pipe size I.D. connection.

·	•		
Size/Length	# U-Style Burners	Total BTUs	Cooking Area
15"	1	40,000	15" x 20"
24"	2	80,000	24" x 20"
36"	3	120,000	36" x 20"
48"	4	160,000	48" x 20"

Note: Radiant heat charbroilers come standard with stainless steel radiant burner covers for heating. Cast iron radiant burner covers keep heat in longer and are stronger than the standard stainless steel radiants.

DIMENSIONS & SHIPPING INFORMATION

Cartons are reinforced for shipping. The weight and dimensions of this reinforced carton are included below and may vary from shipment to shipment.

These items are shipped on a pallet.

Freight Class 85

·· · · ·										
Size	Stainless Steel Radiants (-SR)		Cast Iron Radiants (-CR)		Char Rock with Cast Iron Grids (-RK)					
(Length)	Net	Shipping	Net	Shipping	Net	Shipping	Overall	Shipping		
	Weight	Weight	Weight	Weight	Weight	Weight	Dimensions	Dimensions		
15"	88 lbs	95 lbs	93 lbs	105 lbs	95 lbs	101 lbs	15" W x 29" D x 16" H	18" W x 32" D x 15" H		
	(40 kg)	(43 kg)	(42 kg)	(48 kg)	(43 kg)	(46 kg)	(38 cm x 74 cm x 41 cm)	(46 cm x 81 cm x 38 cm)		
24"	108 lbs	143 lbs	115 lbs	160 lbs	117 lbs	153 lbs	25" W x 29" D x 16" H	28" W x 32" D x 20" H		
	(49 kg)	(65 kg)	(52 kg)	(73 kg)	(53 kg)	(69 kg)	(64 cm x 74 cm x 41 cm)	(71 cm x 81 cm x 51 cm)		
36"	165 lbs	209 lbs	179 lbs	229 lbs	176 lbs	220 lbs	37" W x 29" D x 16" H	40" W x 32" D x 20" H		
	(75 kg)	(95 kg)	(81 kg)	(104 kg)	(80 kg)	(100 kg)	(94 cm x 74 cm x 41 cm)	(102 cm x 81 cm x 51 cm)		
48"	214 lbs	269 lbs	250 lbs	300 lbs	227 lbs	282 lbs	49" W x 29" D x 16" H	52" W x 32" D x 20" H		
	(97 kg)	(122 kg)	(113 kg)	(136 kg)	(103 kg)	(128 kg)	(125 cm x 74 cm x 41 cm)	(132 cm x 81 cm x 51 cm)		



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147