



KM-260B_H

SELF-CONTAINED CUBER
WITH BUILT-IN STORAGE BIN



KM-260B_H
03/31/17
Item # 13239

W x D x H
30" x 28" x 39" *
*including 6" legs

KM-260BAH ★

Air-Cooled
Shown


KM-260BWH


Water-Cooled



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 


- Up to 268 lbs. of ice production per 24 hours
- Up to 100 lbs. of built-in storage capacity
- Durable stainless steel exterior
- Ice bin opening is ADA compliant
- EverCheck™ alert system 
- Removable air filter (Air-cooled model only)
- R-404A Refrigerant

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.
5 Year Parts on Compressor; air-cooled condenser coil.
1 Year - HS-5061 Drain Pump Assembly - Parts & Labor.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

		ICE PRODUCTION				WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/50°F 90°/70°F		Per Cycle Lbs. Cubes		Potable Gal. per 100 lbs. 90°/70°F	Condenser Gal. per 100 lbs. 90°/70°F	kWh Used per 100 lbs. 90°/70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.	Shipping Weight	ENERGY STAR®
Air-Cooled	KM-260BAH	263	200	5.0	238	20.3	N/A	7.6	15A	7.6A	115V/60/1	3,500	204 lbs.	★
Water-Cooled	KM-260BWH	268	237	5.0	238	26.3	121	6.4	15A	7.5A	115V/60/1	3,600	204 lbs.	

KM Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V

Service

- Allow enough space at rear for water supply and drain connections, at least 12" (30 cm) clearance at front and at least 0.6" (15 mm) clearance at top for maintenance.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




KM-260B_H

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN




KM-260B_H
03/31/17
Item # 13239

FRONT VIEW

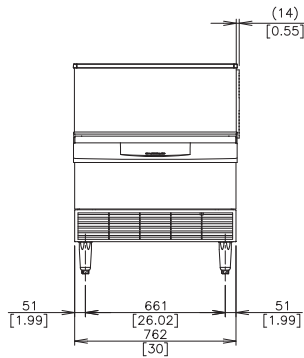


AIR-COOLED




WATER-COOLED

mm
[inch]

SIDE VIEW

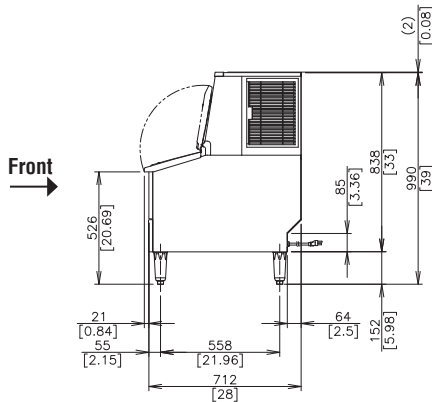


AIR-COOLED

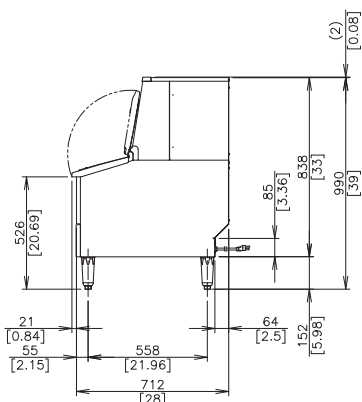


WATER-COOLED

REAR VIEW

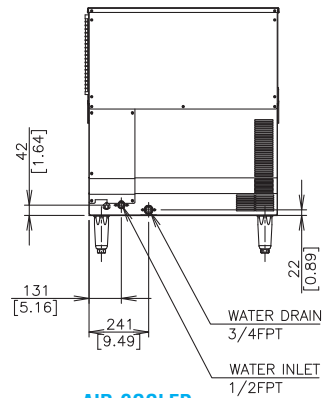


AIR-COOLED

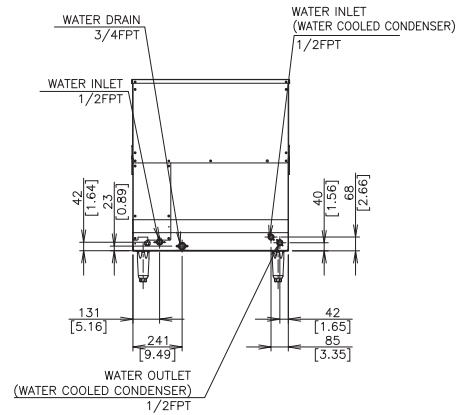


WATER-COOLED

TOP VIEW

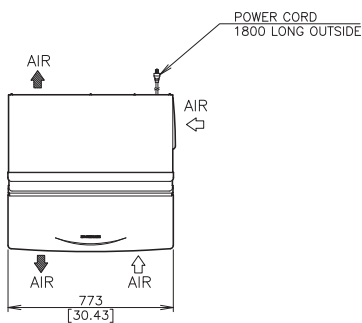

AIR-COOLED

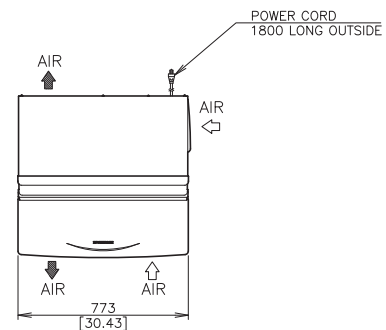

WATER-COOLED