



KM-515M_H

SLIM-LINE MODULAR CRESCENT CUBER



KM-515M_H
03/30/17
Item # 13217

W x D x H
22" x 27^{3/8}" x 30^{5/16}"

KM-515MAH ★

Air-Cooled

Shown on optional bin B-300

KM-515MWH

Water-Cooled

KM-515MRH

Remote Air-Cooled



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 527 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus  Antimicrobial Agent
- EverCheck™ alert system 
- Mount two units side-by-side for 1,054 lbs. per 24 hours (in only 44" of floor space)
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant

Available on Bins:


B-250PF B-700PF/SF B-1150SS B-1650SS DM-200B
B-300PF/SF B-800PF/SF B-1300SS DB-130H
B-500PF/SF B-900PF/SF B-1500SS DB-200H

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries. *Top kit may be required. See Bin Spec Sheets.*

		ICE PRODUCTION				WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hours		Per Cycle		Potable	Condenser	kWh Used	Max. Fuse Size	Amperage	Voltage	Heat Rejection BTU/hr.	Shipping Weight	ENERGY STAR®
		70°/ 50°F	90°/ 70°F	Lbs.	Cubes	Gal. per 100 lbs. 90°/ 70°F	Gal. per 100 lbs. 90°/ 70°F	per 100 lbs. 90°/ 70°F	or HACR Circuit Breaker					
Air-Cooled	KM-515MAH	527	450	9.8	480	18.5	N/A	5.9	20A	11.7A	115V/60/1	9,500	175 lbs.	★
Water-Cooled	KM-515MWH	462	446	10.0	480	23.0	106	5.1	20A	9.6A	115V/60/1	8,200	175 lbs.	
Remote Air-Cooled	KM-515MRH	491	452	10.3	480	20.8	N/A	5.8	20A	11.3A	115V/60/1	8,500	175 lbs.	

KM Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V

Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




KM-515M_H

SLIM-LINE MODULAR CRESCENT CUBER




KM-515M_H
03/30/17
Item # 13217


FRONT VIEW

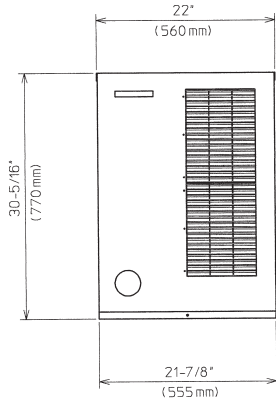

AIR-COOLED

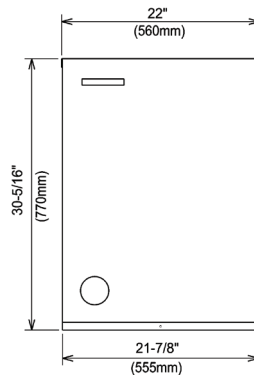


WATER-COOLED

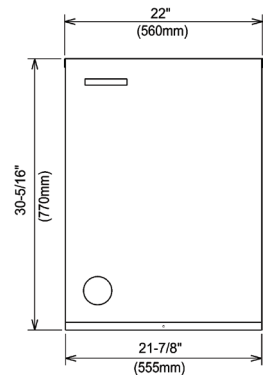


REMOTE AIR-COOLED


SIDE VIEW

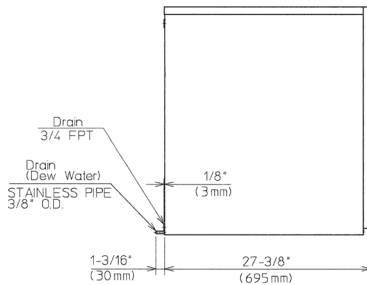

AIR-COOLED

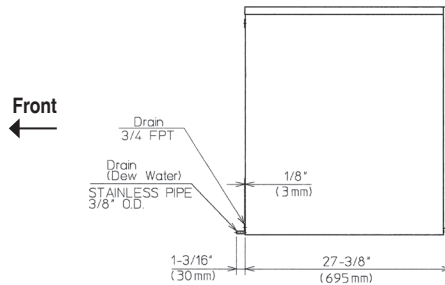


WATER-COOLED

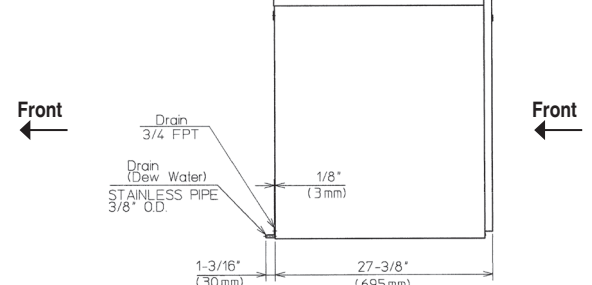


REMOTE AIR-COOLED


REAR VIEW

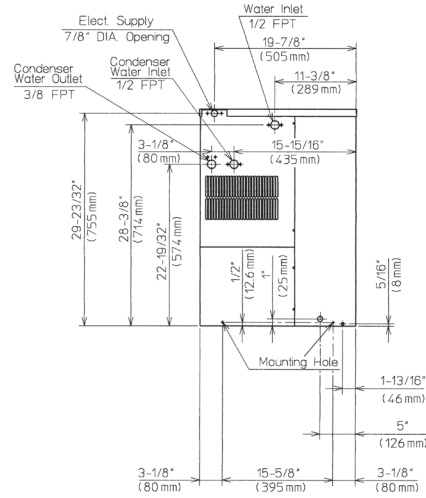

AIR-COOLED

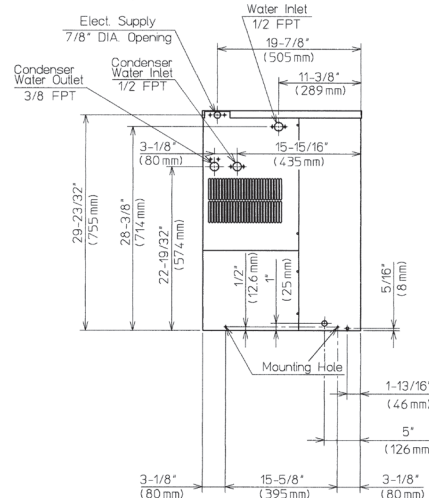


WATER-COOLED

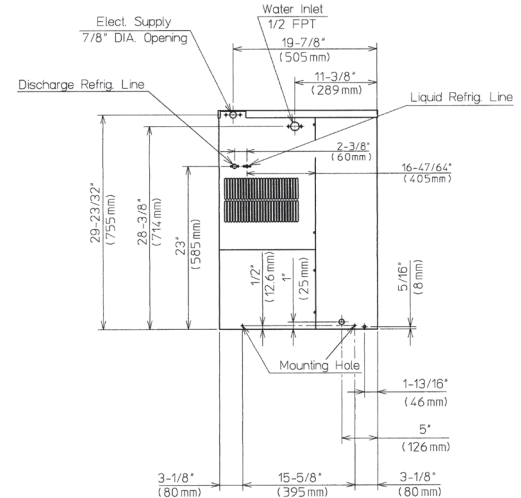

REMOTE AIR-COOLED

BOTTOM VIEW

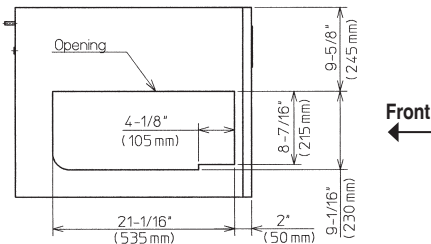

AIR-COOLED
WATER-COOLED
REMOTE AIR-COOLED



Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

URC-5F Remote Condenser (Sold Separately)
(W x D x H) 21 13/16 x 14 1/16 x 32 13/16
For Use with KM-515MRH

