

# BEVERAGE REFRIGERATORS

L3015UI1BPR – 15 Inch Single Zone Undercounter Beverage Refrigerator, Panel Ready



#### **FEATURES:**

- The soft close Everglide<sup>™</sup> shelves and Everglide<sup>®</sup> hinges help dampen vibration and ensure a smooth cooling and storage experience
- Fully adjustable shelves move up and down vertical tracking to allow for a wide range of heights
- Best-in-class cabinet lighting runs the entire interior length of three sides with versatile LED color options: blue, white and amber
- · Commercial grade 304 stainless steel interior and exterior cabinet
- Precision cooling to drive air evenly throughout the interior, preventing unwanted hotspots
- Low-E, double-pane glass door with a layer of argon gas to maximize energy efficiency and deter harmful UV rays

# **ADDITIONAL FEATURES:**

- Includes three (3) full extension beverage shelves plus one (1) shallow bottom shelf to fully utilize interior space
- The integrated door lock, door ajar alarm and temperature alarm provide an added layer of security
- Vibration-dampening wire shelves with stainless steel decorative fronts are both stylish and functional
- Zero-clearance door hinges allow for a seamless installation with adjacent cabinetry
- Temperature range: 34°F-65°F

**Please note:** Panel ready appliances are designed to utilize custom panels to match your cabinetry. The panel ready finish option does not include the pictured wood paneling.

#### **WARRANTY:**

- Three (3) Years Parts and Labor
- Six (6) Years Sealed System Parts
- See Complete Warranty for Details



Model	Voltage	Door Swing	Finish
L3015UI1BPR-LH	115V	Left Hinge	Panel Ready
L3015UI1BPR-RH	115V	Right Hinge	Panel Ready

#### ACCESSORIES:

Model	Description	Finish
HDLPRO	PRO Style Handle for Undercounter Models	Stainless Steel
PL3024UI2WSG28	Replacement Carbon Filter	Gray
PL3015UI1BSG31	Additional Main Beverage Shelf with Trim and Sliding Track	Black










#### **DIMENSIONS:**








### **SPECIFICATIONS:**



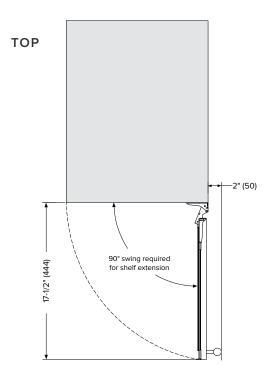

## **INSTALLATION NOTES:**

• The plug requires an additional 2" for clearance; a recessed receptacle may be required for fully recessed installations

NEMA 5-15P

- Dimensions in parentheses are in millimeters
- Cutout dimensions are based off a standard 3/4" panel overlay

### **CUTOUT DIMENSIONS**

