

# 50 Lbs. Commercial Gas Fryer + MCCGF50A



## **Standard Features**

- 120,000 BTU output
- Temperature range: 122°F ~ 375°F
- Safety shut-off
- Cast iron burners with built-in deflectors
- 14.1"W x 13.8"D x 8.4"H frying area
- 1-1/4" drain port for emptying frypot.
- Nickel-plated baskets, vinyl-coated, heat protection handles

### **Exterior Features**

- Stainless steel tank and body
- 6" Adjustable legs

#### Certified Safety Standard

ETL Certified



ETL Sanitation Listed

### Warranty Information


 One year on-site Parts and Labor



5-year warranty
 Stainless steel bowl



# 50 Lbs. Commercial Gas Fryer + MCCGF50A

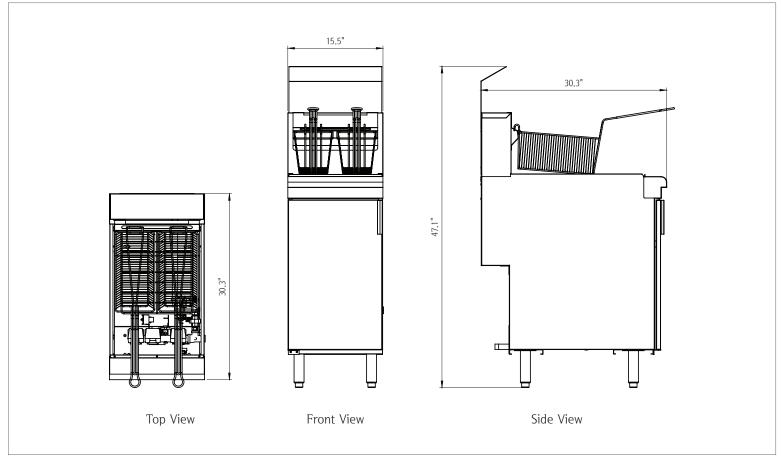

Model		MCCGF50A	MCCGF50A-P
Oil Capacity		50 lbs.	50 lbs.
Gas Output	BTU	120,000	120,000
	(kWh)	35.2	35.2
Number of Burners		4	4
Shipping Weight (Lbs)		180.8	180.8
Manifold	Natural Gas	4" W.C.	
Pressure	Propane Gas		10" W.C.
Manifold Size		3/4"	3/4"
Burner Orifice Size		39/2.5mm	52/2.5mm
Frying Area		14.1" x 13.8" x 8.4"	14.1" x 13.8" x 8.4"
Dimensions (W x D x H)		15.5" x 30.3" x 47.1"	15.5" x 30.3" x 47.1"
Crated Dimensions (W $\times$ D $\times$ H)		18.1" x 33.5" x 33.9"	18.1" x 33.5" x 33.9"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combusitble floors.

Clearance requirements	Combustible Surfaces	Non- combustible Surfaces		
Rear	6"	0"		
Left	6"	0"		
Right	6"	0"		
Options and accessories				
<ul> <li>1 x Oil drainage extension tube (included)</li> <li>Part# MCCGECAST - Caster Kit with hardware</li> </ul>				

Part# MCCGFCAST - Caster Kit with hardware

• Part# MCCGFSPLASH - Splash Guard