

TECHNICAL DATA SHEET FOR E32D5 VENTLESS HOOD

Full Size Digital / Electric Convection Oven
with Ventless Hood on a Stainless Steel Stand

STANDARD FEATURES

- ENERGY STAR® Qualified
- 5 full size sheet pan capacity
- 3-1/3" / 85mm tray spacing
- Compact 28-7/8" / 735mm width
- Digital display Time and Temperature Controls
- Large easy view 3/4" / 20mm high displays
- Electronic thermostat control
- Electronic timer with countdown or time count modes
- Programmable for up to 20 programs
- Water Injection mode
- High performance bi-directional reversing fan system
- 1/4 H.P. 300W bi-directional fan motor
- 6.3kW heating (220-240V) / 5.6kW heating (208V)
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Dual halogen oven lamps
- Anti-skid 2" / 50mm dia. 3" / 76mm high adjustable stainless steel feet
- 5 oven wire racks supplied
- 100% recyclable packaging

VENTLESS HOOD MODEL OVH-32D

- Eliminates the need for expensive ducted hoods
- Attaches directly to the top of oven
- Three-stage air filtration system

ACCESSORIES

- Turbofan SK32 Oven Stand



ETL listed (UL Std 197) and NSF listed (NSF-4)

E32D5

Unit shall be a Moffat electrically heated Turbofan convection oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for five full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes and have separate control keys for water injection, oven light function and timer operation. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 3" / 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging.

OVH-32D

Unit shall be a Giles Ventless Hood system, and will attach directly to the top of unit. Unit will contain three stage air filtration system.

SK32

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

E32D5 Full Size Digital / Electric Convection Oven with Ventless Hood on a Stainless Steel Stand

CONSTRUCTION

Porcelain enameled fully welded oven chamber
Stainless steel front, sides and top exterior
Stainless steel oven fan baffle and oven vent
Removable 5 position stainless steel side racks
Oven racks chrome plated wire (5 supplied)
Stainless steel frame side hinged door
0.2" / 5mm thick door outer glass
0.2" / 5mm thick low energy loss door inner glass
Full stainless steel welded door handle
Stainless steel control panel
Aluminized coated steel base and rear panels

CONTROLS

Electronic controls with Digital Time and Temperature display,
Manual or Program modes
Large 3/4" / 20mm high LED displays
Two individual time and temperature setting control knobs
6 function keys
ON/OFF key
Oven Lamp key (toggle or auto-time off mode settings)
Timer Start/Stop key
Water Injection key (manual shot or timed shot mode settings)
Programs select key
Actual temperature display key
Adjustable buzzer/alarm volume
Thermostat range 150-500°F / 50-260°C
Timer range from 180 minutes in countdown mode
Timer range up to 999 minutes in time count mode
for holding, slow cooking
Over-temperature safety cut-out

CLEANING

Stainless steel top and side exterior panels
Porcelain enameled oven chamber
Fully removable stainless steel oven side racks
Removable stainless steel oven fan baffle
Easy clean door system with hinge out door inner glass (no tools required)
Removable plug-in oven door seal (no tools required)
3" / 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements

208V, 60Hz, 1-phase, 5.8kW, 28A
220-240V, 60Hz, 1-phase, 6.5W, 27A
No cordset supplied

Water Requirements (optional)

Cold water connection 3/4" GHT male
80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 29-1/8" / 740mm
Height 85-5/8" / 2175mm including 3" / 76mm feet
Depth 38" / 965mm

Oven Internal Dimensions

Width 19-1/2" / 495mm
Height 20-1/4" / 515mm
Depth 27-1/2" / 700mm
Volume 6ft³ / 0.17m³

Oven Rack Dimensions

Width 18" / 460mm
Depth 26" / 660mm

Nett Weight (E32D5)

196lbs / 89kg

Packing Data (E32D5)

231lbs / 105kg
20.1ft³ / 0.57m³
Width 29-7/8" / 760mm
Height 32" / 815mm
Depth 36-3/8" / 925mm

SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for
Turbofan E32D and G32D Series ovens
6 position tray runners standard
3" / 76mm diameter wheel swivel castors standard with
2 front castors with dual swivel and wheel
Welded 1-1/2" and 1-1/4" square tube front and rear frames
Welded rack supports/side frames
4 dia. 3" / 76mm swivel castors with 2 front castors
dual wheel and swivel lock
Top frame oven supports suit Turbofan E32D and
G32D Series oven mounting
Supplied CKD for assembly on site

External Dimensions (SK32 Oven Stand)


Width 28-7/8" / 735mm
Height 34-5/8" / 880mm
Depth 25-5/8" / 650mm

Net Weight (SK32 Oven Stand)

40lbs / 18.5kg

Packing Data (SK32 Oven Stand)

51lbs / 23kg
3.5ft³ / 0.1m³
Width 32-5/8" / 830mm
Height 35-1/2" / 900mm
Depth 6" / 152mm

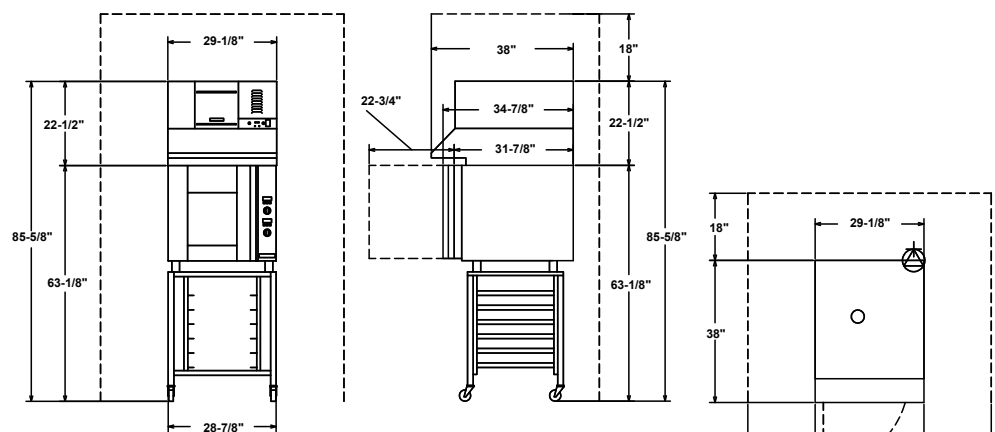

MOFFAT[®]

www.moffat.com

U.S.A.

Moffat Inc
3765 Champion Boulevard
Winston-Salem
North Carolina 27105
Ph Toll Free 1-800-551 8795
Ph 336-661 0257
Fax 336-661 9546
Email sales@moffat.com
www.moffat.com

Manufactured by:

Moffat Limited
16 Osborne Street PO Box 10-001
Christchurch 8081 New Zealand



ISO9001
Quality
Management
Standard

Designed and manufactured by

MOFFAT[®]

ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Moffat 6.10

