

CADET™ 6' X 36" WHIRLPOOL AND BATHING POOL

- 2773.018W Whirlpool featuring System I**
 - Acrylic with fiberglass reinforcement
 - Pre-leveled tub bottom
 - Form-fitted backrest position
 - Dual, molded in arm rests
 - 2.1 HP single speed, self-draining pump/motor
 - Factory installed power cord with plug
 - Eight multi-directional and flow-adjustable jets including:
 - Two Ideal-flow jets
 - Four body massage jets
 - Two recessed back-rest jets
 - Deck-mounted air switch On/Off
 - Two silent air volume controls
 - Quick Connect Safe-T-Heater connection system
 - Factory installed and tested whirlpool system

- 2773.018WC EverClean® Whirlpool Featuring System I:**
 - Same as 2773.018W except with the EverClean System

- 2773.002 Bathing Pool only**

Nominal Dimensions:

1829 x 908 x 502mm
(72" x 35-3/4" x 19-3/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS



To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)



To Be Specified - Optional:

- Safe-T-Heater*: 9075.120
- 6 Foot Acrylic Apron: 9372.018 (specify color)
- 6 Foot Apron: 9272.018 (specify color)
- Jet Trim Ring Kit: 9860.200-two per kit (specify finish)
- Universal Tile Bead Kit: 751755-100
- Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

CADET™ 6' x 36" WHIRLPOOL AND BATHING POOL HIGH GLOSS

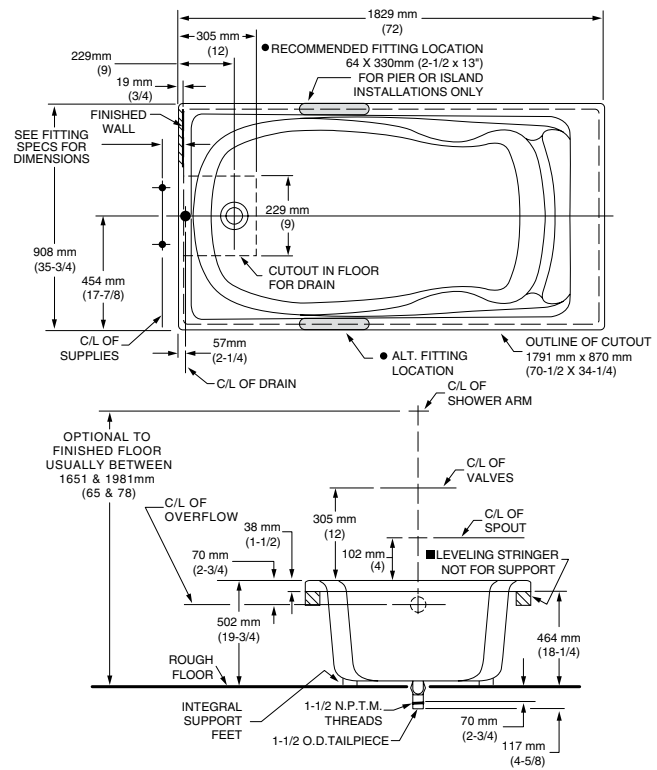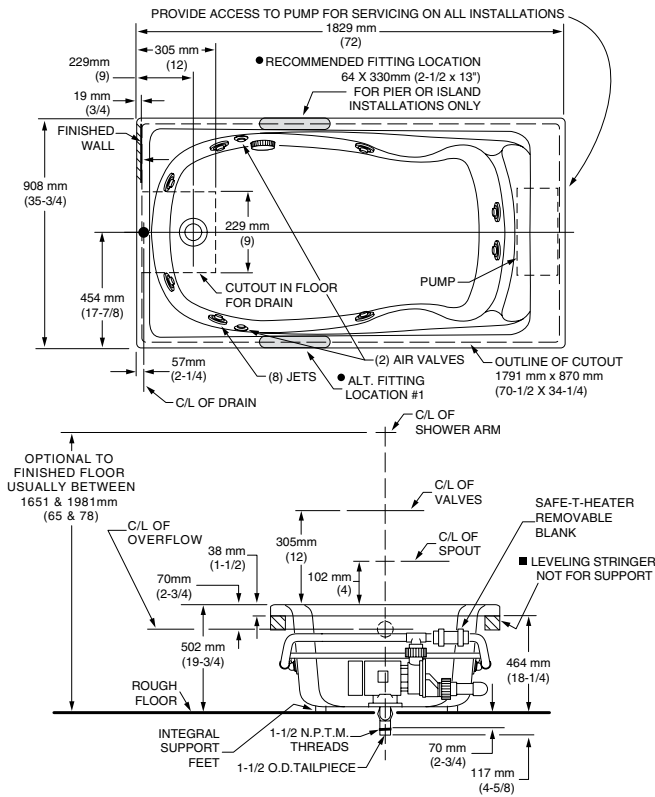

GENERAL SPECIFICATIONS FOR 2773 WHIRLPOOL

INSTALLED SIZE - 72 x 35-3/4 x 19-3/4 In. (1829 x 908 x 502mm)

WEIGHT _____ 101 Lbs. (45 Kg.)

WEIGHT w/WATER _____ 751 Lbs. (341 Kg)

GAL. TO OVERFLOW _____ 78 Gal. (296 L.)

MIN. OPERATING GAL. _____ 64 Gal. (243 L.)

BATHING WELL AT SUMP _____ 23 x 49 In. (584 mm x 1245 mm)

BATHING WELL AT RIM _____ 65 x 29 In. (1651 x 737 mm)

WATER DEPTH TO OVERFLOW _____ 13-1/2 In. (343 mm)

FLOOR LOADING _____ 40 Lbs./Sq. Ft. (190 Kgs/Sq. m.) (PROJECTED AREA)

PTS. _____ 23.8

CUBE (FT³) _____ 48.3

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP _____ 2.1 HP, 14.4 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2773 BATHING POOL

INSTALLED SIZE _____ 72 x 35-3/4 x 19-3/4 In. (1829mm x 908 mm x 502mm)

WEIGHT _____ 76 Lbs. (34 Kg.)

WEIGHT w/WATER _____ 725 Lbs. (326 Kg.)

GAL. TO OVERFLOW _____ 78 Gal. (296 L.)

BATHING WELL AT SUMP _____ 23 x 49 In. (584 mm x 1245 mm)

BATHING WELL AT RIM _____ 65 x 29 In. (1651 x 737 mm)

WATER DEPTH TO OVERFLOW _____ 13-1/2 In. (343 mm)

FLOOR LOADING _____ 38 Lbs./Sq. Ft. (183 Kgs/Sq. m.) (PROJECTED AREA)

PTS. _____ 23.8

CUBE (FT³) _____ 48.3

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT AND APRON NO. 9272.018 OR 9372.018 AVAILABLE AND MUST BE ORDERED SEPARATELY.

● FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.