

SPECIFICATIONS

503E THREE-FUNCTION HANDSHOWER KIT

Model

D461020

Description

- 3 function 503E handshower: wide, centerjet and aeration with flow regulating check valve
- D-Force™ Technology
- Showerarm mount with brass ball joint and integral check valve
- 72" metal hose
- Maximum flow rate 2.0 gpm @ 20 - 80 psi
- Uses 20% less water than a standard showerhead flowing at 2.5 gpm
- Handshower kit provides code approved back flow prevention Ω

Standards




- UPC/cUPC
- Energy Policy Act of 1992

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.


Flow Rate

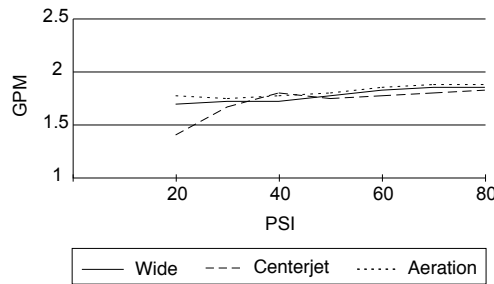

Certified by IAPMO R&T

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

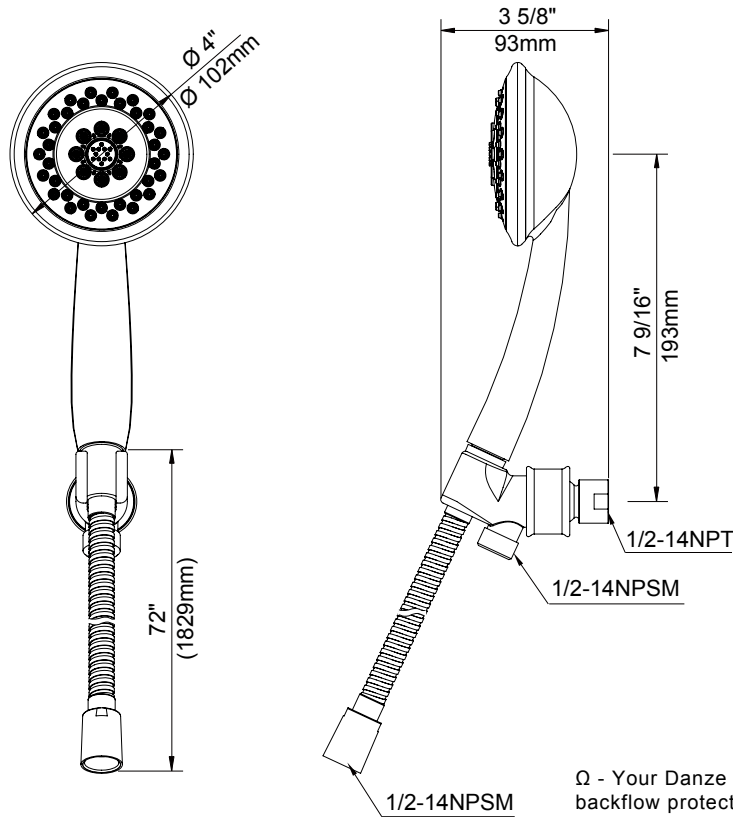

Ω - Your Danze handshower kit incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASSME A112.18.1/CSA B125.1. It incorporates two certified check valves in series. The check valves are located in the handshower handle, and either the supply mount or the showerarm mount outlet.

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____