



MINI STEP LIGHT

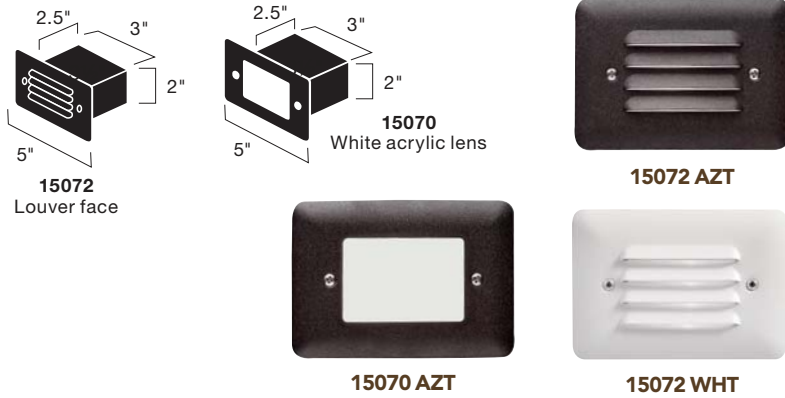

LOUVERED & BRICK LIGHT GLASS LENS

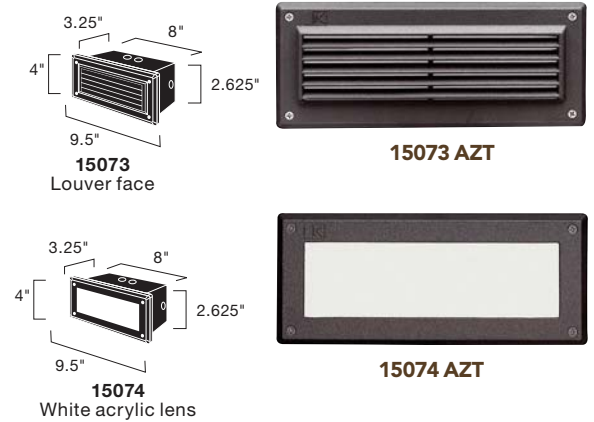

15070 AZT/15072 AZT, WHT

15073 AZT/15074 AZT

Ordering Guide & Finish	15070 AZT 15072 AZT, WHT		15073 AZT 15074 AZT																
Housing	Aluminum or copper faceplate with white reflector. Zinc plated steel housing. White acrylic diffuser on 15070 only.		Cast Aluminum with a fully sealed heat-resistant glass lens																
Lamp Base	12V T5 wedge base socket		(2) 12V T3 bi-pin, high temperature porcelain sockets																
Supplied Lamp	11.6-W(VA) 912X (17023) 6.5-W(VA) 918X MAX supplied on copper Xenon light source Power usage at 12V AC input VA MAX: 11.6-W(VA)		10-W(VA) Q10T3 (17011) Halogen (2) Halogen light source Power usage at 12V AC input VA MAX: 10-W(VA) VA MAX: 11.6-W(VA)																
Incandescent Lamp Options	6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)		N/A																
LED Lamp Options	2W (18039-18041) see page 137. Compares up to 16W Xenon. Light distribution may be affected by location of sockets.	2W (18120-18121) see page 138. Compares up to 16W Xenon.	2W (18042-18044) see page 138. Compares up to 20W Halogen. Light distribution may be affected by location of sockets.	2W (18124-18125) see page 138. Compares up to 20W Halogen.															
Wiring	Wire connection must be made inside fixture housing. 90° supply wire required.		Wire connection must be made inside fixture housing. 75° supply wire required.																
Mounting Access. (Included)	Mounting hardware and junction box		Stainless steel mounting bracket																
LED Option	15782 and 15780 – on page 57		15774 and 15773 – on page 57																
Notes	For recessed installation. For outdoor use only. Available with louvered or white acrylic faceplate.		For outdoor use only. Masonry or concrete use only.																
Photometric with Supplied Lamp	15070 Mounting Height	0.5'	1'	1.5'	2'	2.5'	3'	3.5'	15073 Mounting Height	0.5'	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
	6"	2.1	.5	.1	-	-	-	-	12'	.3	1.1	.8	.5	.1	.02	-	-	-	-
	12"	1.2	.98	.5	.2	.1	.02	-	24'	-	-	.1	.2	.2	.2	1	.03	.02	-
									36'	-	-	-	.01	.01	.03	.06	.03	.01	
	15072 Mounting Height	0.5'	1'	1.5'	2'	2.5'	3'	3.5'	15074 Mounting Height	0.5'	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
	6"	2.6	.3	.09	-	-	-	-	12'	-	-	-	-	.01	.04	.04	-	-	-
	12"	1.6	1.2	.54	.08	.1	.04	-	24'	-	-	.06	.1	.09	.04	.04	-	-	-
									36'	.02	.04	.04	.04	.04	.04	.01	-	-	-