

UNDERSCORETM

5' (1.5 m) BATH **K-1130**


Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- 81 gallon (306.6 L) capacity
- 60" (152.4 cm) x 32" (81.3 cm) x 21" (53.3 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- CSA B45.0
- CSA B45.5
- CSA International

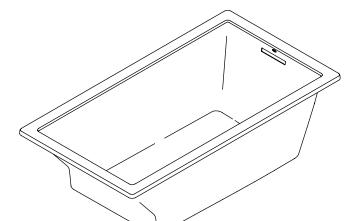

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1130	5' (1.5 m) bath – drop-in	□ 0		☐ Other
PARILIPAR A				
	Clearflo slotted overflow bath drain	□СР	□ PB	□ Other
K-7272 Optional A	Clearflo slotted overflow bath drain	□СР	□РВ	□ Other

Product Specification

The acrylic bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 21" (53.3 cm) in height. Bath shall be for drop-in installation. Bath shall have an 81 gallon (306.6 L) capacity. Bath shall have a molded lumbar support. Bath shall be Kohler Model K-1130-____.

UNDERSCORETM

Technical Information


Fixture*:					
Bathing well:					
Basin area, bottom	42" (106.7 cm) x 23-1/2" (59.7 cm)				
Basin area, top	55-1/8" (140 cm) x 27-1/8" (68.9 cm)				
Weight	75 lbs (34 kg)				
To overflow:					
Water depth	17-1/8" (43.5 cm)				
Capacity	81 gal (306.6 L)				
* Approximate measurements for comparison only.					
Drop-in cutout	59-1/2" (151.1 cm) x 31-1/2" (80 cm)				

Installation Notes


Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 58 lbs/square foot (284 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



No change in measurements if connected with required drain illustrated. (K-7272)

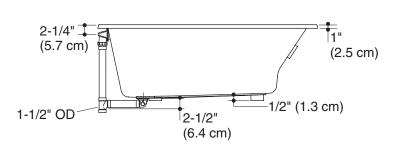



Product Diagram

