

Product Information

Applicable product:	
Bath whirlpool – custom pump	K-1164-CB
Fixture*:	
Bathing well:	
Basin area, bottom	55-1/4" (140.3 cm) x 23-1/2" (59.7 cm)
Basin area, top	64-1/2" (163.8 cm) x 32" (81.3 cm)
Weight	112 lbs (50.9 kg)
To overflow:	
Water depth	15" (38.1 cm)
Capacity	75 gal (284.1 L)
* Approximate measurements for comparison only.	
Included components:	
Cut-out template	1042557-7
Pump:	V Hz A
1-speed	120 60 7.5
Minimum access panel pump/control:	
20" (50.8 cm) W x 15" (38.1 cm) H	required

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (177 kg/square meter) loading.


Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

Fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

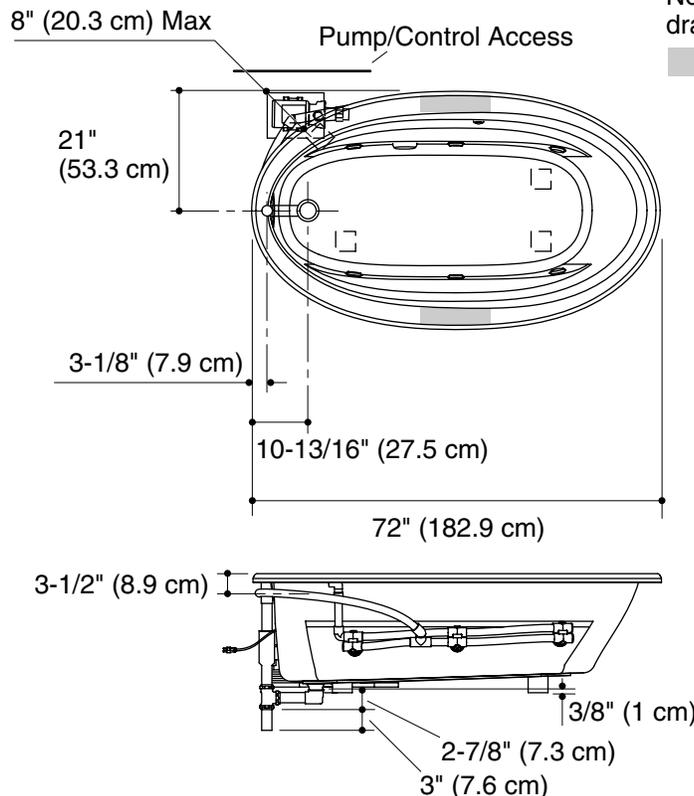

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended faucet area



Drop-In Rim Detail

