


FEATURES

- 60-1/2" (153.7cm) x 60-1/2" (153.7cm) x 24" (61cm)
- Acrylic
- 1.5 hp variable speed pump with 1.5 kW heater, and back-lit user control
- 6 Flexjets
- UL Listed
- LESS ALL TRIM
- For corner installation
- Optional K-1435 front apron
- Custom pump locations

K-1433-HE/-HH/-HM

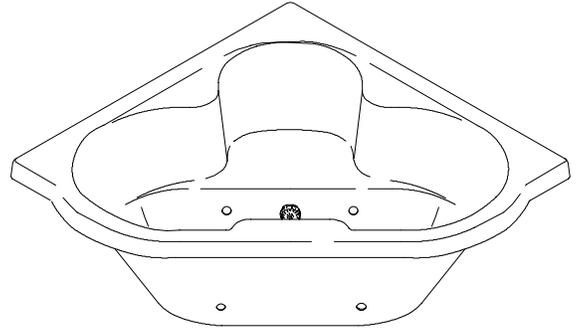

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ANSI Z124.1
- ASME/ANSI A112.19.7M
- IAPMO/UPC
- Underwriters Laboratories (UL)

COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Price Book for additional finishes
- NA None Applicable

SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-1433-HE	Corner whirlpool, custom pump (shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1433-HH	Corner whirlpool, custom pump (top view shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1433-HM	Corner whirlpool, custom pump (top view shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

Required Accessories

K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7167	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-1435	Apron (removable)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1181	Vinyl tiling-in bead (use when wall material contacts any top surface of bath)	<input type="checkbox"/> NA	
K-1491	Pillow	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1703	Remote control	<input type="checkbox"/> NA	

PRODUCT SPECIFICATION:

The whirlpool shall be 60-1/2" (153.7cm) in length, 60-1/2" (153.7cm) in width, and 24" (61cm) in height. Whirlpool shall be made of acrylic. Whirlpool shall have 6 Flexjets, 1.5 hp variable speed pump, 1.5 kW heater, and back-lit user control. Whirlpool shall be UL listed. Whirlpool shall be less all trim. Whirlpool shall be Kohler Model K-1433-_____-_____.

CORNERSTONE™

PRODUCT INFORMATION

Fixture*:	basin area	top area	weight
Bathing well	45" (114.3cm) x 25" (63.5cm)	66" (167.6cm) x 33" (83.8cm)	165 lbs. (74.8kg)
	water depth	capacity	
To overflow	19" (48.3cm)	112 gal. (424L)	

* Approximate measurements for comparison only.

Pump	Heater	Voltage	Frequency	Amperage
1.5 HP	1.5 kW	240 V	50/60 Hz	11 A

REQUIRED ELECTRICAL SERVICE

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):	
Pump/control	220/240 V, 20 A, 50/60 Hz

INSTALLATION NOTES


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 1600 lbs. (725.7kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

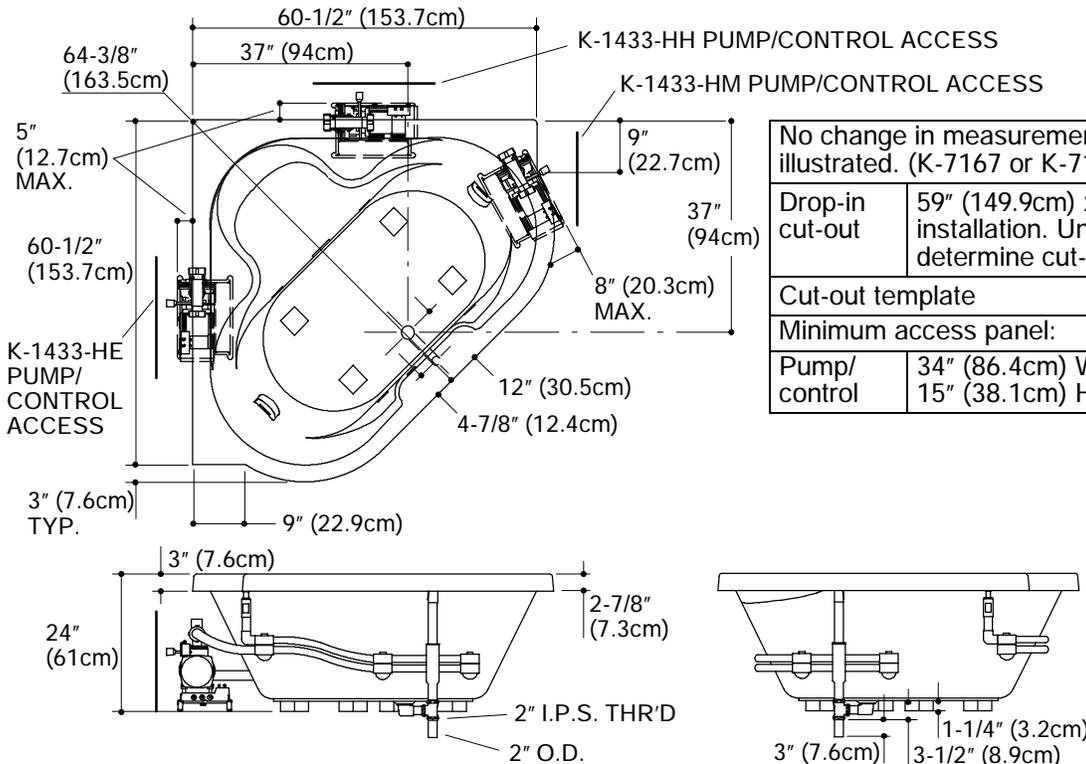

No change in measurements if connected with drain illustrated. (K-7167 or K-7167M)		
Drop-in cut-out	59" (149.9cm) x 59" (149.9cm) corner installation. Unit must be on job site to determine cut-out radius of contoured front.	
Cut-out template	111461-7	
Minimum access panel:		
Pump/control	34" (86.4cm) W x 15" (38.1cm) H	required

PRODUCT DIAGRAM