


Features

- Acrylic
- 1 hp blower motor with 300 W heater, and electronic back-lit user control
- 122 BubbleMassage™ airjets
- With Zones of Control™ feature
- Coordinating Bancroft™ Suite
- 66" (167.6 cm) x 42" (106.7) x 22" (55.9 cm)

BUBBLEMASSAGE™ BATH WITH AIRJETS

K-1158-G

ALSO K-1158-GCR

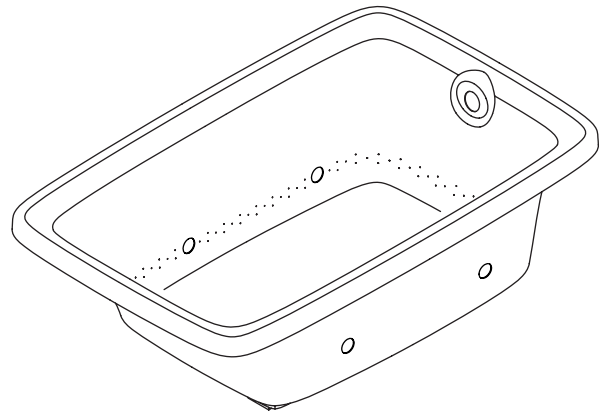

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- IAPMO/UPC IGC 171
- Underwriter's Laboratories (UL)
- CSA International
- ASME A112.19.7M

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1158-G	BubbleMassage™ Bath	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
K-1158-GCR	BubbleMassage™ Bath with chromatherapy	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____

Recommended Accessories

K-7161-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
-----------	-------	-----------------------------	-----------------------------	--------------------------------------

Optional Accessories

K-1705	Remote control	N/A		
K-1601	Footstop	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
K-1491	Pillow	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
K-9498	3" (7.6 cm) whirlpool keypad trim	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification:

The BubbleMassage™ bath shall be 66" (167.6 cm) in length, 42" (106.7 cm) in width, and 22" (55.9 cm) in height. Bath shall be made of acrylic. Bath shall have a 1 hp blower motor with 300 W heater and electronic user control. Bath shall have zones of control and 122 BubbleMassage™ airjets. Bath shall be Kohler Model K-1158-_____-_____.

BANCROFT™ 5.5'

Technical Information

Bath with chromatherapy	K-1158-GCR	shown	
Bath	K-1158-G	not shown	
Fixture:*	basin area	top area	weight
Bathing well	46" (116.8 cm) x 30" (76.2 cm)	57" (144.8 cm) x 34" (86.4 cm)	130 lbs. (59 kg)
	water depth	capacity	
To overflow	16" (40.6 cm)	95 gal. (359.6 L)	

* Approximate measurements for comparison only.

Required Accessory:	
Cutout template	1043292-7

Blower motor/control:	Heater	V	Hz	A
1 hp	300 W	220-240	50/60	3

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Blower motor/control	220-240 V, 15 A, 50/60 Hz
----------------------	---------------------------

Installation Notes

Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 1800 lbs. (816.5 kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

A blower motor/control access panel is required.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

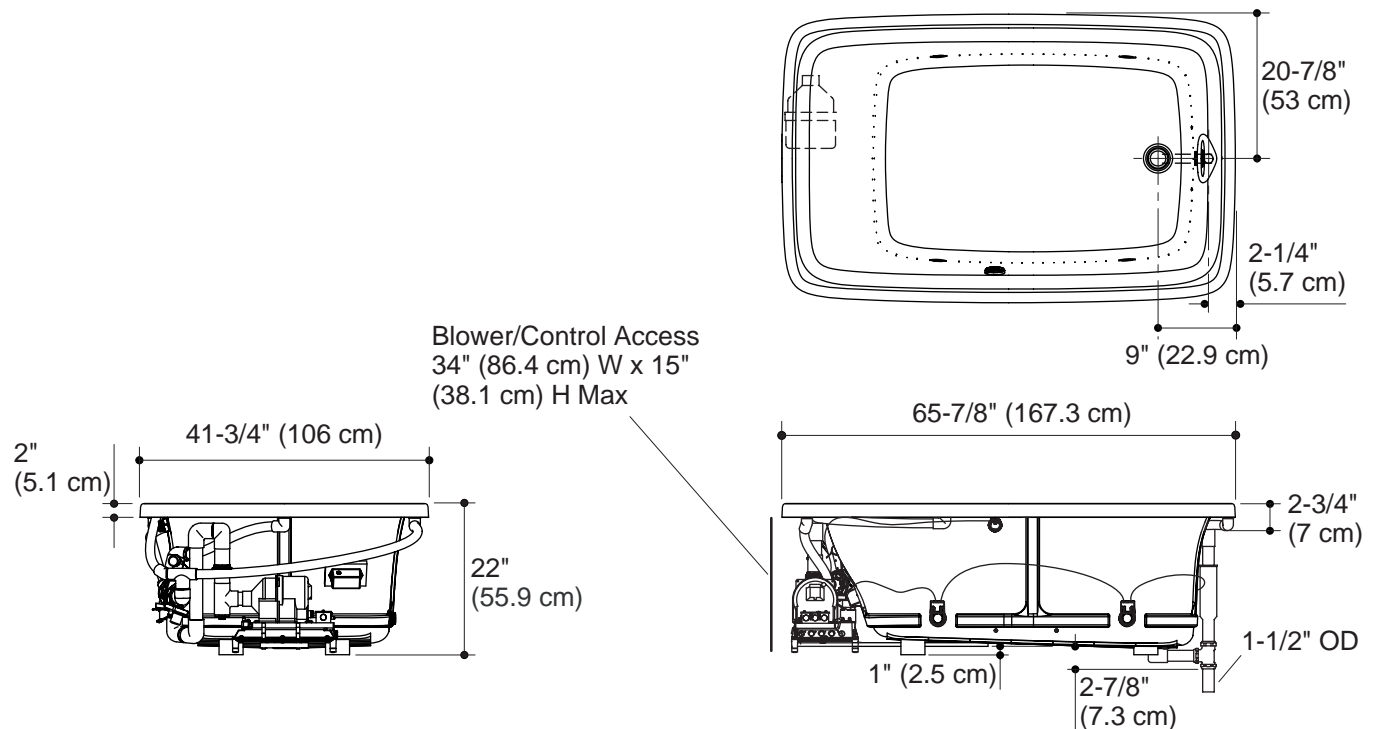

Product Diagram