

PORTRAIT® 5.5'

Features

- Acrylic
- 122 BubbleMassage™ airjets
- With Zones of Control™ feature
- Coordinating Portrait® Suite
- Blower motor with 300 W heater and electronic back-lit user control
- 67" (170.2 cm) x 42" (106.7 cm) x 22" (55.9 cm)


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- UL 1795

BUBBLEMASSAGE™ BATH WITH AIRJETS

K-1457-G
ALSO K-1457-GCR

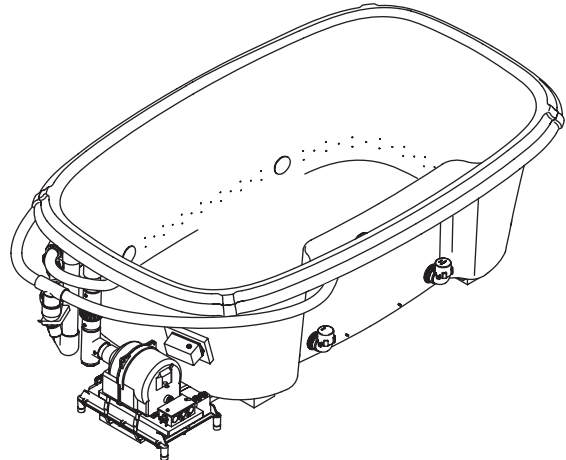

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1457-G	BubbleMassage bath with airjets	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1457-GCR	BubbleMassage bath with airjets and chromatherapy	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
-----------	------------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1705	Remote control		<input type="checkbox"/> NA	
K-9498	3" (7.6 cm) metal finish keypad trim	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____

Product Specification

The acrylic BubbleMassage bath shall be 67" (170.2 cm) in length, 42" (106.7 cm) in width, and 22" (55.9 cm) in height. Bath shall have a blower motor with 300 W heater and electronic back-lit user control. Bath shall have zones of control and 122 BubbleMassage airjets. Bath shall coordinate with Portrait Suite. Bath shall be Kohler Model K-1457-G____-_____.

PORTRAIT® 5.5'

Technical Information

Fixture*:				
Basin area:				
Bathing well, bottom	50" (127 cm) x 29" (73.7 cm)			
Bathing well, top	61" (154.9 cm) x 32" (81.3 cm)			
Weight	128 lbs (58.1 kg)			
To overflow:				
Water depth	16" (40.6 cm)			
Capacity	100 gal (378.5 L)			
* Approximate measurements for comparison only.				
Included components:				
Cut-out template	113311-7			
Blower motor / control:	kW	V	Hz	A
	300	220-240	50/60	3

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Blower motor/control	220-240 V, 15 A, 50/60 Hz
----------------------	---------------------------

Installation Notes

The blower motor and piping protrude beyond the rim.

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 51 lbs/square foot (246.8 kg/square meter).

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.


A blower motor/control access panel is required.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

Recommended faucet area.

K-1457-GCR

Note: The blower and piping protrude beyond the rim.

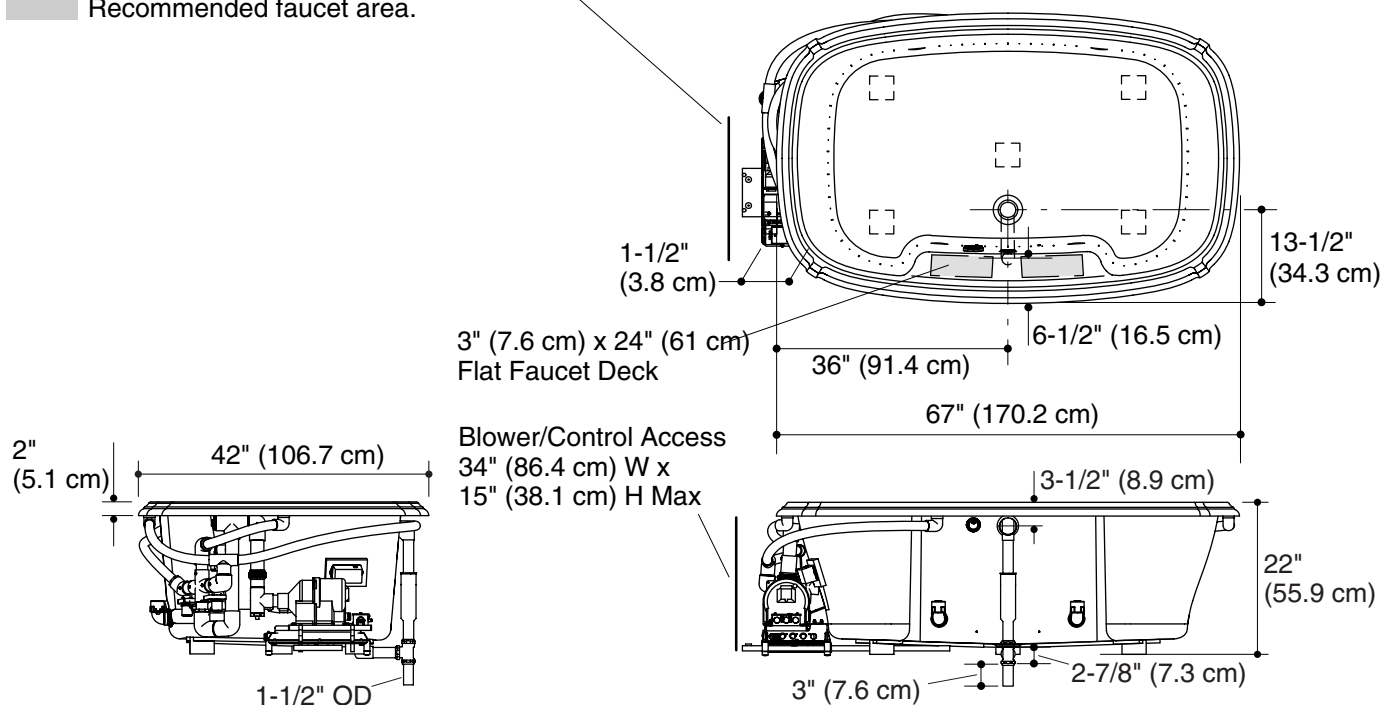

Product Diagram

PORTRAIT® 5.5' BUBBLEMASSAGE™ BATH WITH AIRJETS

Page 2 of 2
1038563-4-C

THE BOLD LOOK
OF **KOHLER®**