

ANTIQUE_{TM}

Features

- Brass construction
- Single-hole mounting
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- Lever handle
- Available with or without handspray
- Flexible connections for easy installation
- 2.2 gpm (8.3 lpm) flow rate
- Handle(s) are ADA compliant
- Available with or without 10" (25.4 cm) escutcheon plate
- 8-7/8" (22.5 cm) swing spout


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- Energy Policy Act of 1992 (EPACT)
- ASSE 1014
- NSF 61
- ADA

KITCHEN SINK FAUCET **K-171**ALSO K-168, K-169, K-170

ADA

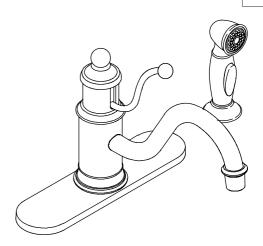

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel

Specified Model:

Model	Description	Colors/Finishes	
K-168	Less escutcheon plate; less handspray	□ CP	□ BN
K-169	Less escutcheon plate; with handspray	□ CP	□ BN
K-170	With escutcheon plate; less handspray	□ CP	□ BN
K-171	With escutcheon plate; with handspray (shown)	□ CP	□ BN


Product Specification

Single-control kitchen sink faucet shall be of brass construction. Faucet shall feature a one-piece, self-contained ceramic disc valve, allowing both volume and temperature control. Faucet shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Faucet shall have a flow rate of 2.2 gallons (8.3 L) per minute. Faucet shall feature single-hole mounting, 8-7/8" (22.5 cm) swing spout, lever handle, and flexible connections for easy installation. Product shall be available with or without a 10" (25.4 cm) escutcheon plate, and with or without handspray. Faucet shall feature ADA compliant handle. Faucet shall be Kohler Model K-____-___.

ANTIQUE_{TM}

Installation Notes

Install this faucet following the installation instructions provided.

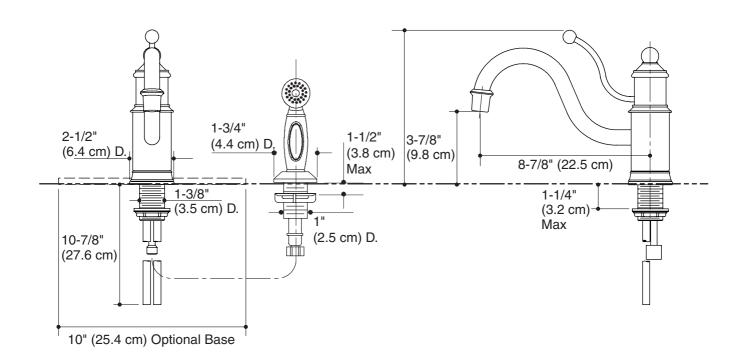

Product Diagram

