


### Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- Integral high-dome ceiling
- Integral soap ledges
- In-line heater
- 4 individually adjustable ProFlex® hydro-massage jets
- Left or right drain with integral flange
- Pre-drilled for Sonata accessory kit
- 60" (152.4 cm) x 34-13/16" (88.4 cm) x 90" (228.6 cm)

### BATH AND SHOWER WHIRLPOOL MODULE K-1683-H, K-1684-H

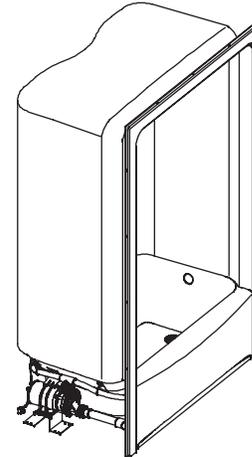

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- ASTM E162
- ASTM E662
- UL 1795

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1683-H	Bath whirlpool module left drain – integral flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1684-H	Bath whirlpool module right drain – integral flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Required Accessories</b>				
K-9459	Sonata accessory kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>				
K-7166-AF	Pop-up bath drain	<input type="checkbox"/> PB	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath whirlpool module shall be 60" (152.4 cm) in length, 34-13/16" (88.4 cm) in width, and 90" (228.6 cm) in height. Product shall have an outlet left or right with integral flange. Product shall have 4 individually adjustable ProFlex® hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have an integral-high dome ceiling, integral soap ledges, and shall be pre-drilled for K-9459 Sonata accessory kit. Bath whirlpool module shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_.

# SONATA®

## Optional Accessories

K-1491	Removable pillow	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-9529	Removable Sonata bath whirlpool seat	<input type="checkbox"/> 0			
K-9694	Jet trim kit (metal finishes)	<input type="checkbox"/> 0	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____

## Technical Information

Fixture*:	
Basin area:	
Bathing well	46" (116.8 cm) x 23" (58.4 cm)
Top area	54" (137.2 cm) x 27" (68.6 cm)
Weight	205 lbs (93 kg)
To overflow:	
Water depth	11-7/8" (30.2 cm)
Capacity	55 gal (208.2 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

## Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Heater: 120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump.

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 48 lbs/square foot (232 kg/square meter) loading.

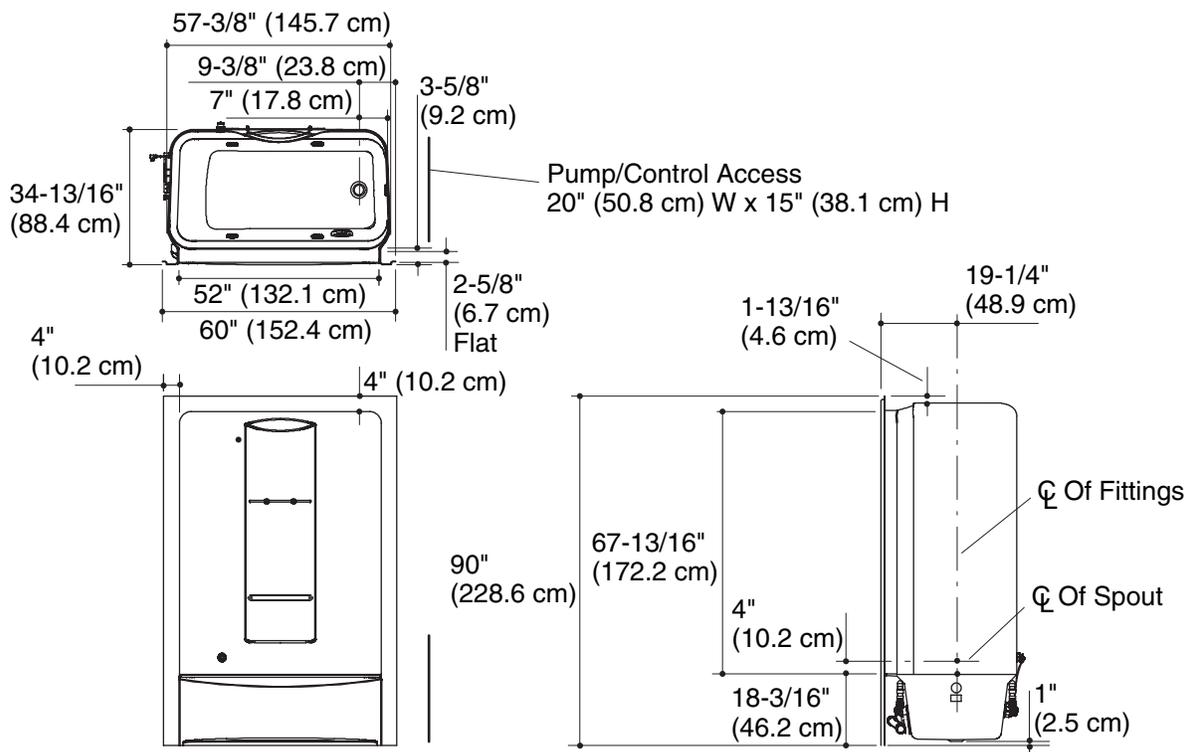

## Product Diagram