

Features

- Flipstream Technology™.
- Four unique, experiential spray patterns: Coverage™ Kotton™ Komotion™ Kurrent™.
- Sleek contemporary design.
- Adjustable angle for various user heights.
- 2.0 gal/min (7.6 l/min) maximum flow rate.

Required Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose



Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------





CP Polished Chrome



SN Vibrant® Polished Nickel



BN Vibrant® Brushed Nickel

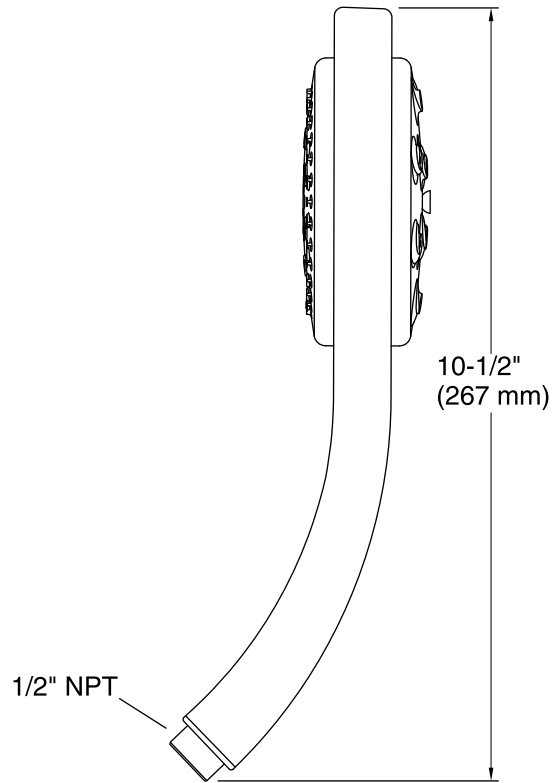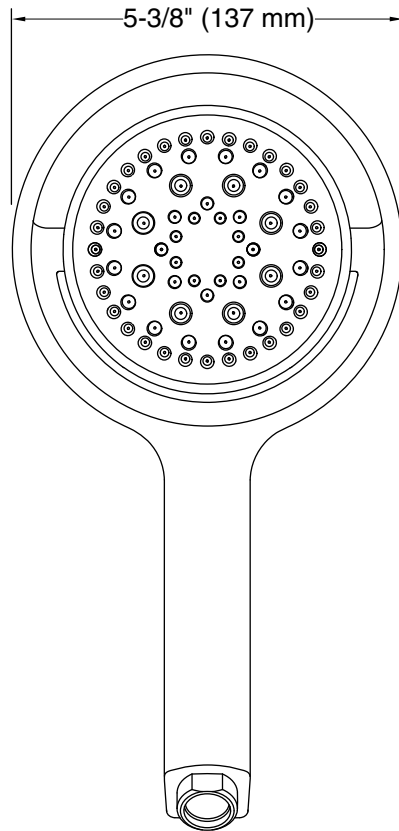

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.