

Applicable product:	
Bath	K-810
Bath will comply with the Americans with Disabilities Act when installed with seat at head end. <div style="float: right; border: 1px solid black; padding: 2px;">ADA</div>	

Fixture*:	
Bathing well:	
Basin area, bottom	47" (119.4 cm) x 24" (61 cm)
Basin area, top	67" (170.2 cm) x 29" (73.7 cm)
Weight	380 lbs (172.4 kg)
To overflow:	
Water depth	12-7/8" (32.7 cm)
Capacity	52 gal (196.8 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	70-1/2" (179.1 cm) x 34-1/2" (87.6 cm)
-----------------	--


Required accessories:	
Caribbean [®] hand grip rails (pairs)	K-9616

Recommended accessories:	
Clearflo bath cable drain with PVC tubing	K-7213
Clearflo bath cable drain without PVC tubing	K-7214
Clearflo pop-up bath drain	K-7161-AF

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 47 lbs/square foot (227.6 kg/square meter) loading.

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.1.

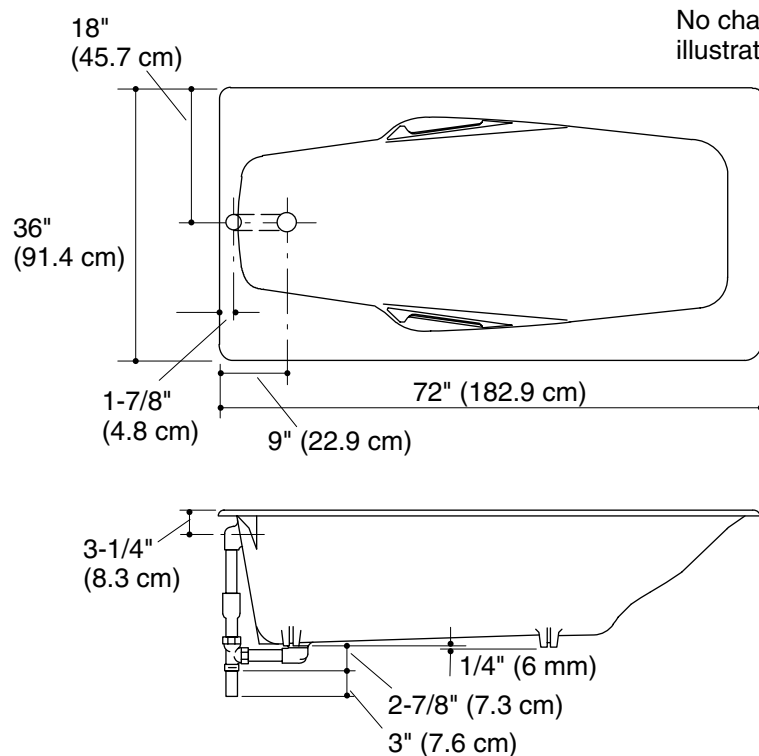

No change in measurements if connected with drain illustrated.

