


Features

- Acrylic
- Molded heated lumbar support
- Integral 3-sided tiling flange for alcove installation
- Three temperature settings
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)

5' BATH WITH BASK™ HEATED SURFACE AND INTEGRAL FLANGE

K-1121-LW
ALSO K-1121-RW

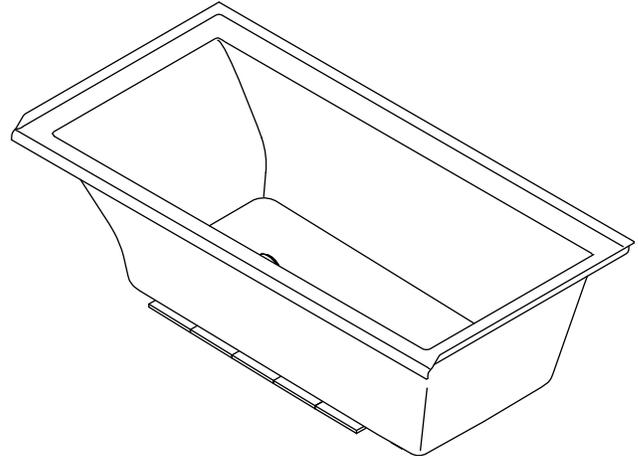

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1121-LW	5' bath with Bask heated surface and integral flange – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1121-RW	5' bath with Bask heated surface and integral flange – right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height. Bath shall have molded heated lumbar support. Bath shall feature integral 3-sided tiling flange for alcove installation. Bath shall have three temperature settings. Bath shall be Kohler Model K-1121-LW-____ or K-1121-RW-____.

UNDERScore®

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	42-7/16" (1078 mm) x 20" (508 mm)			
Basin area, top	54-5/16" (1380 mm) x 24-1/4" (616 mm)			
Weight	75 lbs (34 kg)			
To overflow:				
Water depth	15-1/8" (384 mm)			
Capacity	59.8 gal (226 L)			
* Approximate measurements for comparison only.				
Heater:	W	V	HZ	A
	65	120	60	1.1


Installation Notes

Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.

Floor support under bath must provide for a minimum of 42 lbs/square foot (202 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

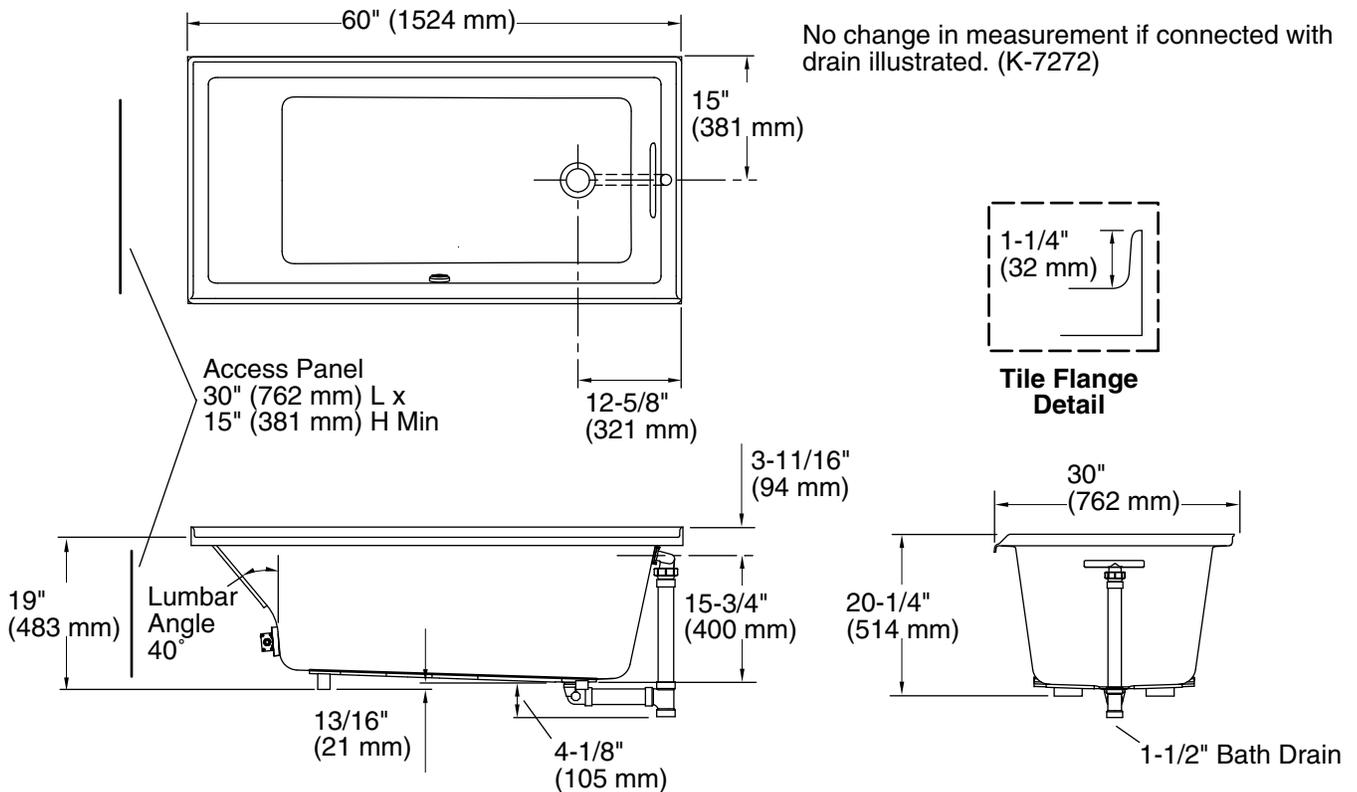

Product Diagram