


### Features

- Acrylic
- Drop-in or under-mount installation
- Molded heated lumbar support
- Three temperature settings
- 66" (1676 mm) x 32" (813 mm) x 22" (559 mm)

### 5.5' DROP-IN BATH WITH BASK™ HEATED SURFACE K-1821-W1

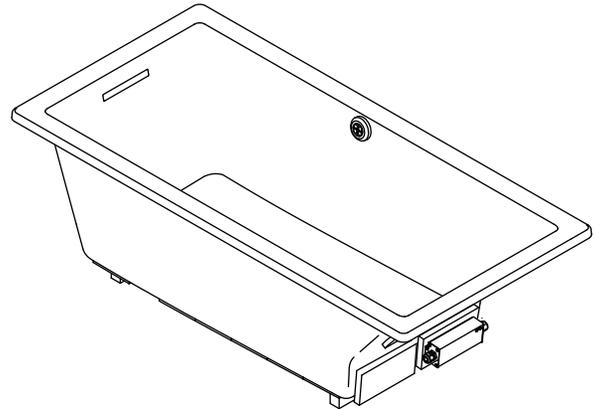

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1821-W1	5.5' drop-in bath with Bask heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
<b>Required Accessories</b>			
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
<b>Optional Accessories</b>			
K-550	Under-mount kit		<input type="checkbox"/> NA
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

### Product Specification

The acrylic bath with heated surface shall be 66" (1676 mm) in height, 32" (813 mm) in width, and 22" (559 mm) in depth. Bath shall be for drop-in or under-mount installation. Bath shall have molded heated lumbar support. Bath shall have three temperature settings. Bath shall be Kohler Model K-1821-W1-\_\_\_\_.

# UNDERScore®

## Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	44-1/2" (1130 mm) x 22-5/16" (567 mm)
Basin area, top	59-5/8" (1514 mm) x 25-1/2" (648 mm)
Weight	86 lbs (39 kg)
To overflow:	
Water depth	18" (457 mm)
Capacity	85.8 gal (325 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	64-1/2" (1638 mm) x 30-1/2" (775 mm)			
-----------------	--------------------------------------	--	--	--

Heater:	W	V	HZ	A
	65	120	60	1.1


## Installation Notes

Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.

Floor support under bath must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

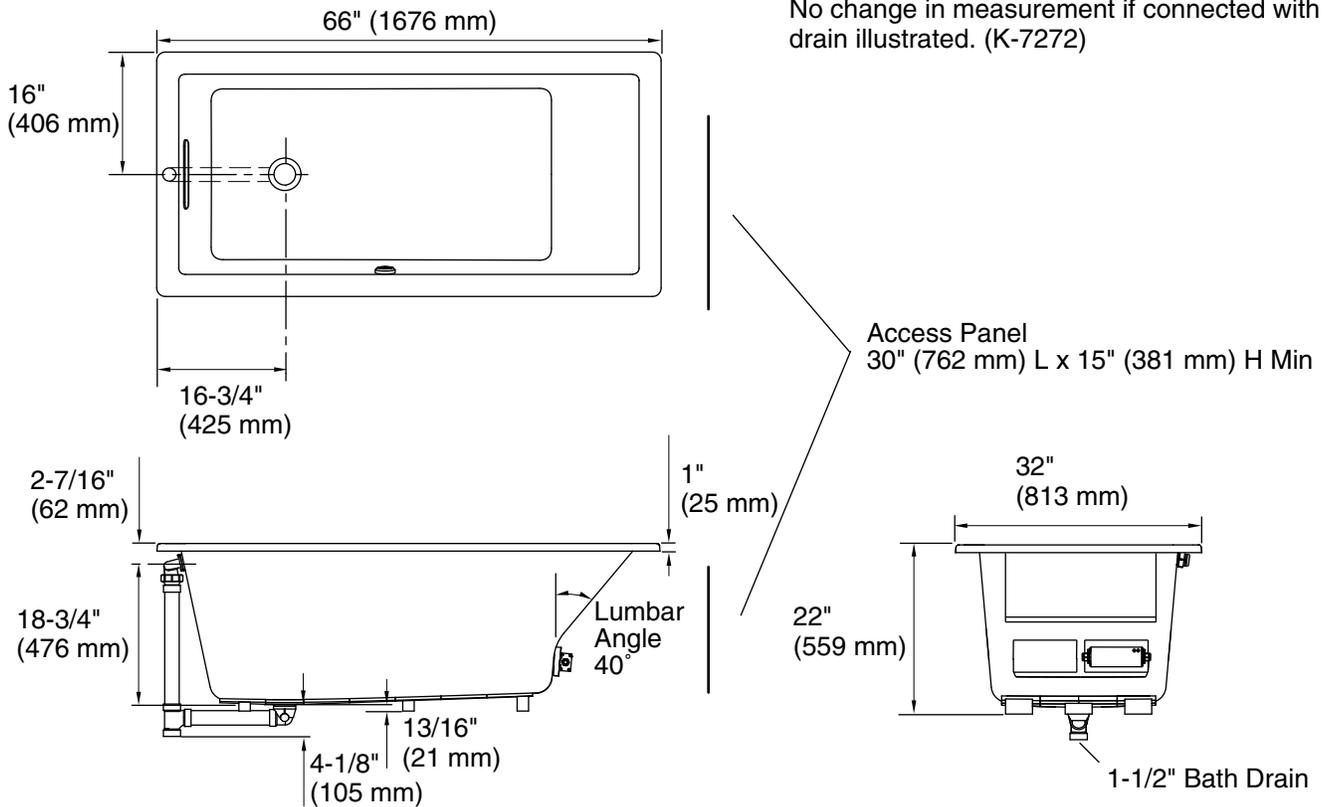

## Product Diagram