

KOHLER® Roughing-In

K-1239-GLA, K-1239-GRA MARIPOSA® 5' BUBBLEMASSAGE™ BATH WITH INTEGRAL APRON

Product Information

| | |
|--|------------|
| Applicable products: | |
| 5' Bubblemassage bath with integral apron – left drain (shown) | K-1239-GLA |
| 5' Bubblemassage bath with integral apron – right drain | K-1239-GRA |

| | |
|---|------------------------------|
| Fixture*: | |
| Bathing well: | |
| Basin area, bottom | 46" (1168 mm) x 24" (610 mm) |
| Basin area, top | 54" (1372 mm) x 27" (686 mm) |
| Weight | 109 lbs (49.4 kg) |
| To overflow: | |
| Water depth | 14" (356 mm) |
| Capacity | 63 gal (238.5 L) |
| * Approximate measurements for comparison only. | |

| | | | | |
|---------------|--------|-----|----|---|
| Blower motor: | Heater | V | Hz | A |
| | 300 W | 120 | 60 | 5 |

Required Electrical Service


| | |
|---|--------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Blower motor: | 120 V, 15 A, 60 Hz |
| Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord. | |

Installation Notes

Install this product according to the installation guide.


Floor support under the bath must provide for a minimum of 44 lbs/square foot (214.8 kg/square meter) loading.

Fixture conforms to tolerances in CSA B45.5/IAPMO Z124. All dimensions are nominal.

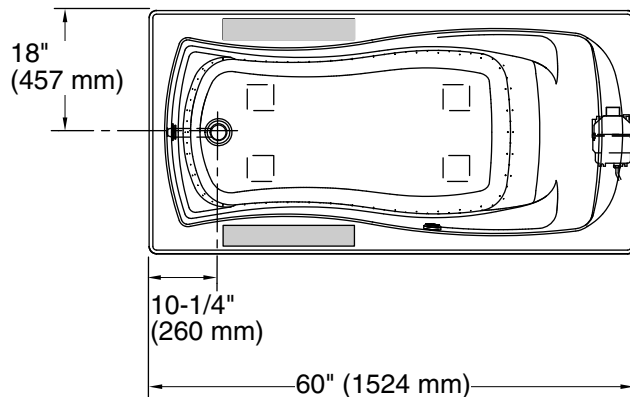

No change in measurements with drain shown. (K-7166-AF)

■ Recommended faucet area.



Integral Flange Detail

