

FAUCET DESCRIPTION

- Metal construction with chrome plated, glacier, ivory, platinum or chrome/LifeShine® polished brass, LifeShine® polished brass, stainless, copper, Black Opal™, Satine™, or classic gold finishes
- 1/2" IPS connections
- Lever style handles
- Handle inserts include hot (red) and cold (blue) color indicators
- Includes Protégé side spray

OPERATION

- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1224 cartridge design
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

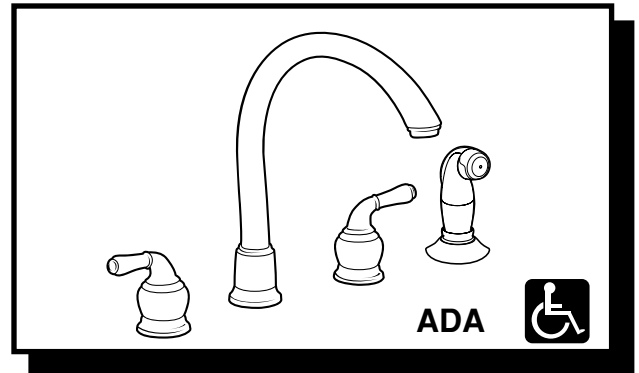

**Monticello® with Cathedral™ Spout
Two Handle Kitchen Faucet
with Protégé Side Spray**
(less handle inserts on 7000 series,
handle inserts included on 80000 series)

**Models: 7786, 7786CP, 7786P, 7786SL,
7786W, 7786V, R7786CG/A7785CG,
R7786/A7785, R7786P/A7785P,
R7786CPR/A7785CPR, R7786PM/A7785PM,
R7786BP/A7785BP, R7786ST/A7785ST,
87786, 87786SL**

**NOTE: See reverse side
for illustrated parts**

**Spout installs through deck holes a minimum of
1-1/4" (32mm) in diameter. Valves install through
1-1/8" (28mm) min. diameter hole.**

