# **Buy it for looks.** Buy it for life.®


# Specifications

#### DESCRIPTION


 Metal construction with chrome plated, antique nickel, antique bronze, LifeShine<sup>®</sup> brushed bronze, LifeShine<sup>®</sup> brushed nickel, LifeShine<sup>®</sup> hammered nickel, nickel, oil rubbed bronze, LifeShine<sup>®</sup> polished brass, platinum, pewter, LifeShine<sup>®</sup> satine, glacier or wrought iron finishes

#### WARRANTY

• Warranted for one year against material or manufacturing defects



Models: A725, A725AN, A725AZ, A725BB, A725BN, A725HN, A725NL, A725ORB, A725P, A725PM, A725PW, A725ST, A725W, A725WR

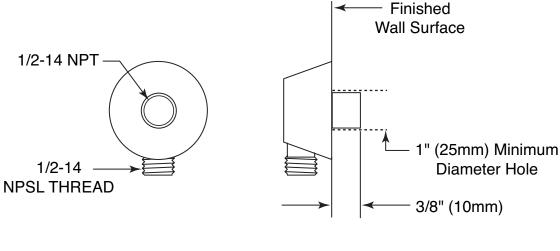

BACK VIEW

SIDE VIEW

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

# Buy it for looks. Buy it for life.®

# Specifications

#### **FAUCET DESCRIPTION**

- Metal construction with various finishes identified by suffix **OPERATION**
- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ±3.6°F (±2°C)

#### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein, including ASSE 1016
- ADA ( for lever handles

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



### **ROTHBURY**<sup>™</sup> Three Function Transfer Valve Trim Kit

Models: TS4211 series

Valves: 3330 series, 3320 series

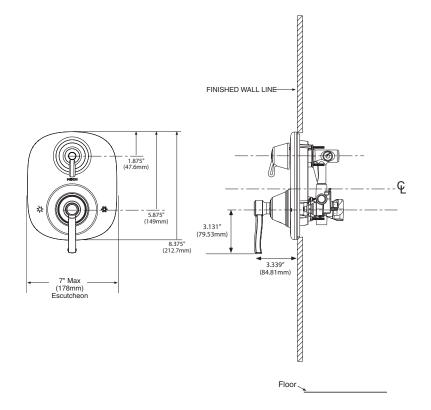

### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

## **MOEN** Buy it for looks. Buy it for life.®


## Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix FLOW
- Showerhead limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 2.0 gpm (7.6 L/min) at 80 psi **STANDARDS**
- Third party certified to meet ASME A112.18.1/ CSA B125.1, ICC A117.1 and all applicable requirements referenced therein
- EP suffix models are IAPMO Green listed and third party certified to WaterSense®


#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




**ROTHBURY**<sup>™</sup> **Single Function Showerhead** 

#### Models: S6335 series







## **CRITICAL DIMENSIONS**

(DO NOT SCALE)