


Type \_\_\_\_\_  
-30  
P7000

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7000	-30	1-F8T5	5	12-3/16	1-1/8

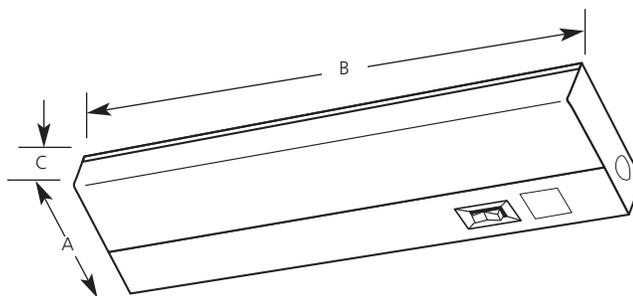

**Specifications:**

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser: 12-3/16" L x 1" D x 2-29/32" W
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Electrical

- Standard 120v NPF ballast
- Rocker switch furnished
- KO for G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- Flush mounted under cabinets and shelves, over a desk, in a kitchen or work area
- 1/2" KO's in ends for continuous row mounting or end electrical feed
- 1/2" KO in back for electrical feed
- Keyhole slots on top for ease of mounting