



► **Special Finish Options\*** (ordered separately, late 2013)


- Physical Vapor Deposition brushed stainless (Brushed Chrome)
- Physical Vapor Deposition Brushed Nickel
- Physical Vapor Deposition Polished Brass
- \* Minimum order quantities and long lead times may apply. Please contact Customer Service for details.

► **Electrical Specifications**

- Control Circuit – 6.75 VDC
- Sensor Range – Nominal: 4" - 5" (102-127 mm) Faucet Adaptive Self-Adjustment Range: 2" - 14" (51-356 mm) nominal
- Battery Life – 3-years under worst case conditions of 8,000 cycles per month and high water pressure without power harvesting. Power harvesting should extend service life of batteries.
- Power Supplies – 6 VDC Solar Energy Module with 6 VDC Alkaline Battery Pack

► **ROUGH-IN**

**EFX-275.00X.0X0X Faucet  
with Single Line Water Supply**

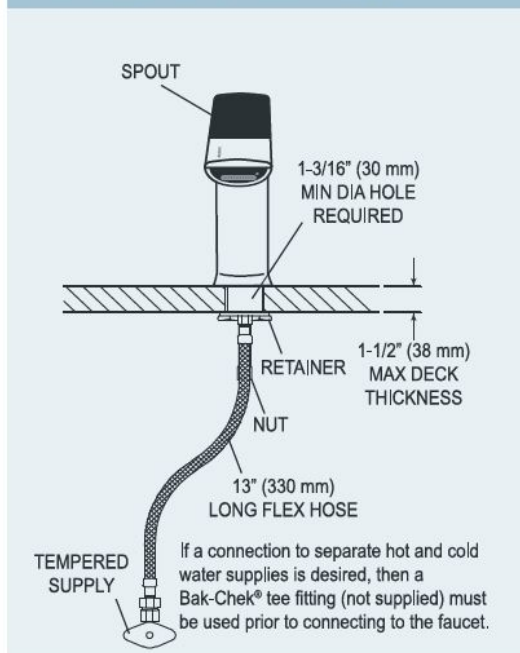

**EFX-275.50X.0X0X Faucet  
with Hot & Cold Water Supply**

