

SEE REVERSE FOR ROUGH-IN DIMENSIONS

FEATURES:

- Bar connects to existing shower supply pipe allowing water to flow through the bar
- 24 in. slide bar with adjustable height hand shower holder
- Curve at the bottom of the bar prevents interference with the shower valve
- Includes VS-3010 showerhead and 48 in. metal hose with integrated vacuum breaker
- 2.5 gpm (9.5 L/min) flow rate

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified

FINISHES:

ADD SUFFIX TO MODEL #

- Polished Chrome (standard)
- Brushed Nickel BN

WARRANTY:

- 1 year limited

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JANUARY 2014




Management Systems
Registered to ISO 9001

SPEAKMAN®

Neo™ Waterslide SWS-1001

SPECIFICATION

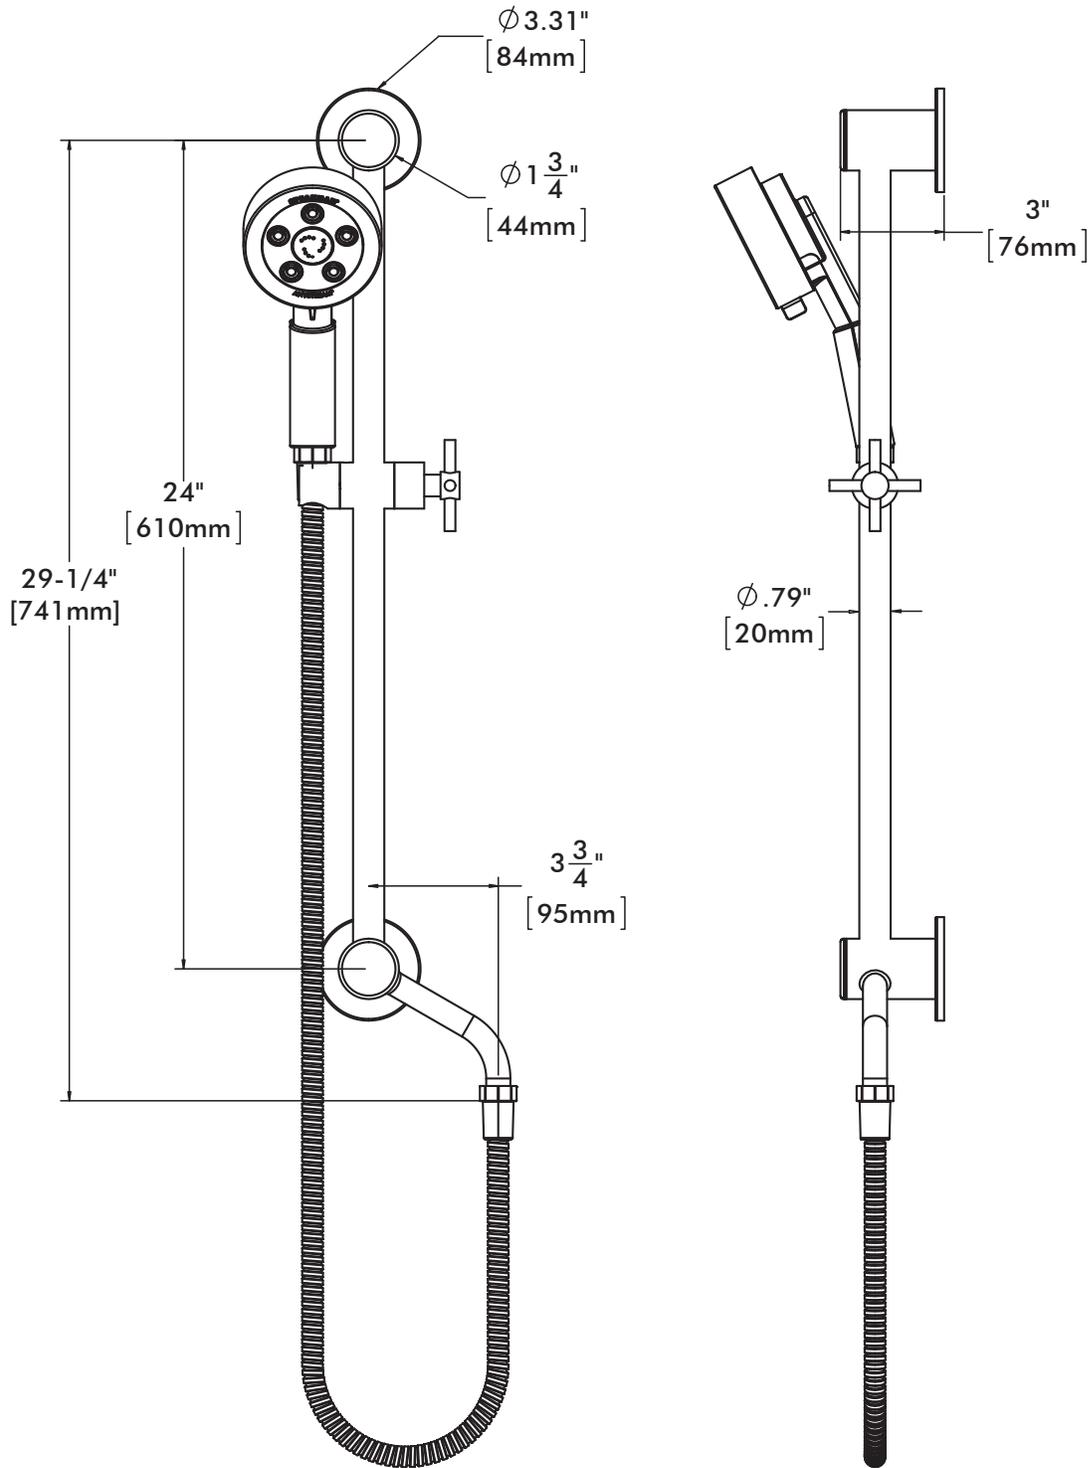

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM



Management Systems
Registered to ISO 9001

REVISION DATE: JANUARY 2014