

TOTO®

MS934304EF Eco Lloyd® One Piece Toilet, 1.28 GPF



MS934304EF - Eco Lloyd® Toilet



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



UniFit Rough-in: Easy to install 10", 12" and 14" rough-in's available.



Standard 2" flush valve Wide 3" flush valve

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



- Geometric transitional design
- E-Max® flushing system
- Decorative one-piece with skirted design and high-profile tank
- Chrome trip lever
- 12" Unifit rough-in, less supply
- ADA compliant

Decorative, ADA compliant, high profile one piece toilet. Low consumption (4.8 Lpf/1.28 Gpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® Maple seat included.

■ MS934304EF

Elongated with SoftClose® maple seat, 12" Unifit rough-in.

□ SS304

Maple SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ TSU03W.10

10" UniFit rough-in: Optional

□ TSU03W.12

12" UniFit rough-in: Supplied

□ TSU03W.14

14" UniFit rough-in: Optional

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard #CP Polished Chrome
Optional See price book for additional finishes

 ADA Compliant

MS934304EF

Eco Lloyd® One Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trap-way.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed (E-Max System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-3/4" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-1/4"
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **MS934304EF** 108 lbs.

Shipping Dimensions: **MS934304EF**
 32"L x 19-1/2"W
 x 29"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CSA B 45 requirements.


Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from left hand side.

Recommended seat: SS304

These dimensions and specifications are subject to change without notice.

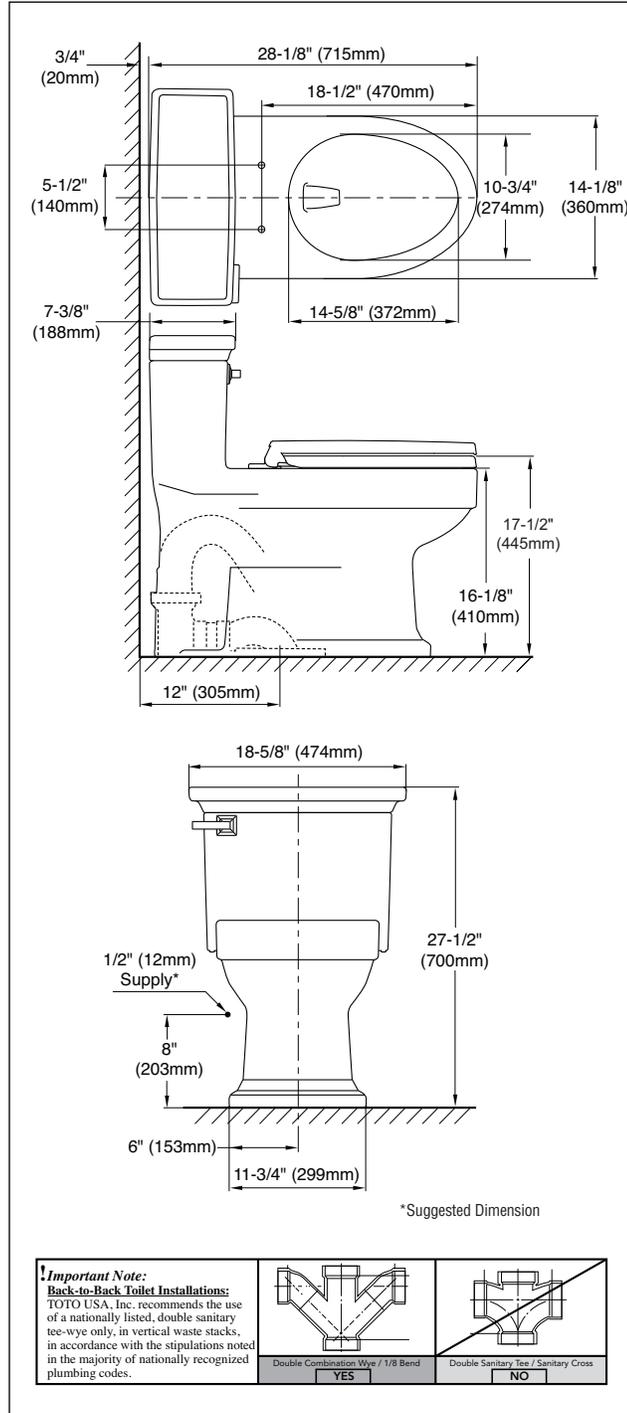

MS934304EF - Eco Lloyd® Toilet



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO LTD. 10/04 #A10222

Printed on recycled paper

REV 02/09