

TOTO®

CST804S Pacifica® Close Coupled Toilet, 1.6 GPF



CST804S - Pacifica® Close Coupled Toilet with SS114 - SoftClose® Seat




G-Max® Technology: Quiet, powerful, commercial grade flushing performance.



UniFit Rough-in: Easy to install, 10", 12" and 14" rough-in's available.



Choose a SoftClose toilet seat, or upgrade to a Washlet.

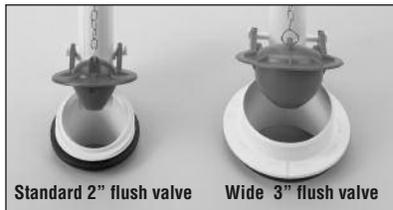

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Unique sculpted design, high profile toilet
- Pacifica® Design Suite: Matching lavatories, toilets and bidets
- G-Max® Technology for commercial grade flushing performance
- Skirted styling with concealed trapway for easy cleaning
- UniFit Rough-in
- Large water surface

Decorative, high profile close coupled toilet with 12" UniFit Rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, color matched mounting covers included, less seat.

■ CST804S

Elongated toilet and tank combination, less seat. 12" UniFit Rough-in.

□ CT804S

Elongated bowl with 12" UniFit Rough-in only.

□ ST804S

Tank and cover only. Complete with tank trim and coupling components.

□ TSU01W.10

10" UniFit Rough-in: Optional

□ TSU01W.12

12" UniFit Rough-in: Supplied

□ TSU01W.14

14" UniFit Rough-in: Optional

□ SS114

SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard #CP Chrome Plated
Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

CST804S

Pacifica® Close Coupled Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO® G-Max® low consumption toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max® System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-1/4" x 8-1/2"
 Trap Diameter: 2-1/16"
 Rough-in: 12" (10" and 14")
 Trapseal: 2-5/8"
 Warranty: One Year Limited Warranty
 Material: Tank and Bowl: Vitreous china
 UniFit Rough-in: PVC

Shipping Weight: **CT804S** 75.5 lbs.
ST804S 26.5 lbs.

Shipping Dimensions: **CT804S** 30-1/8"L x 16-3/4"W x 22"H
ST804S 16-7/8"L x 9-1/4"W x 16-3/8"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

U.S. Patent: D406,325 5,819,326
 5,983,413 6,108,826
 and pending

Note: No flexible supply hose included. Please purchase before installation.

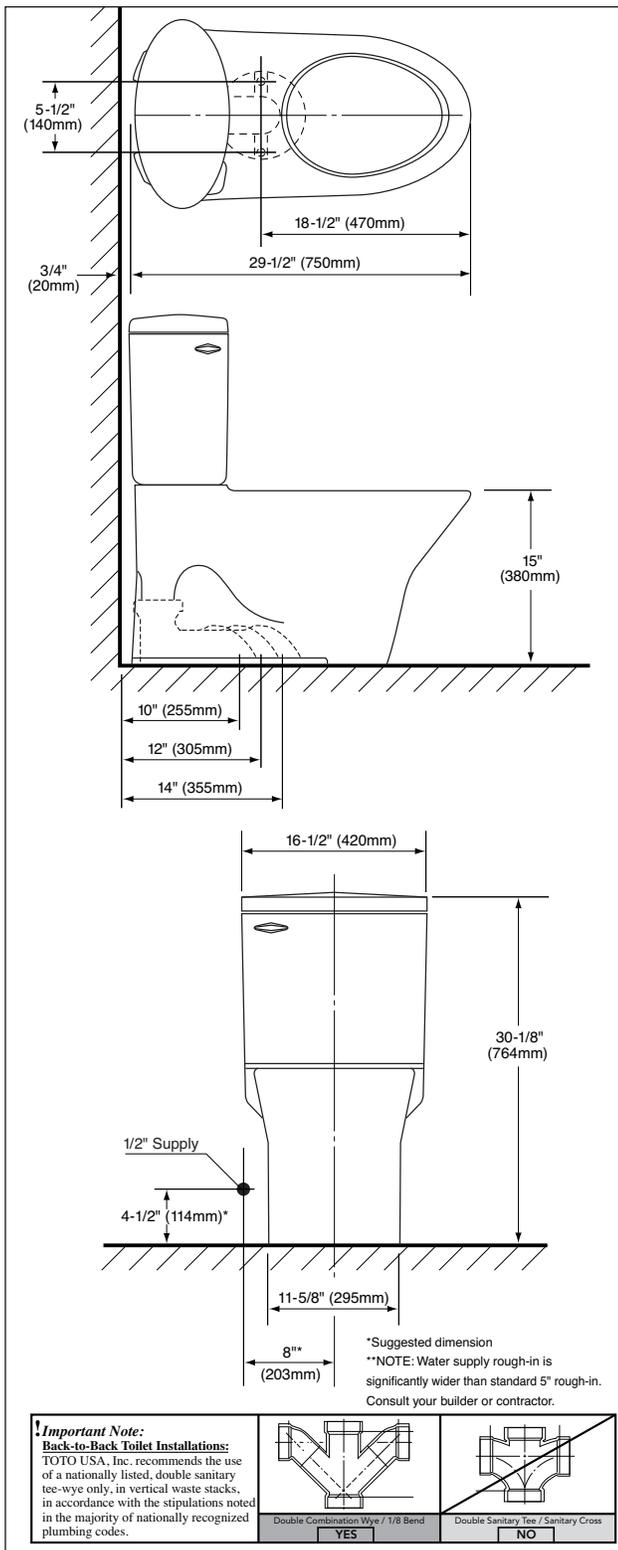

CST804S - Pacifica® Close Coupled Toilet

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO U.S.A. 10/06 #A10095

Printed on recycled paper

REV 03/09