

psi

max. 125
20 72.5 20

bar

max. 8,6
1,4 5 1,4







°F

max. 158°
140°

°C


max. 70°
60°

Thread Seal Tape
Ruban pour joint filetés
Cinta de roscas

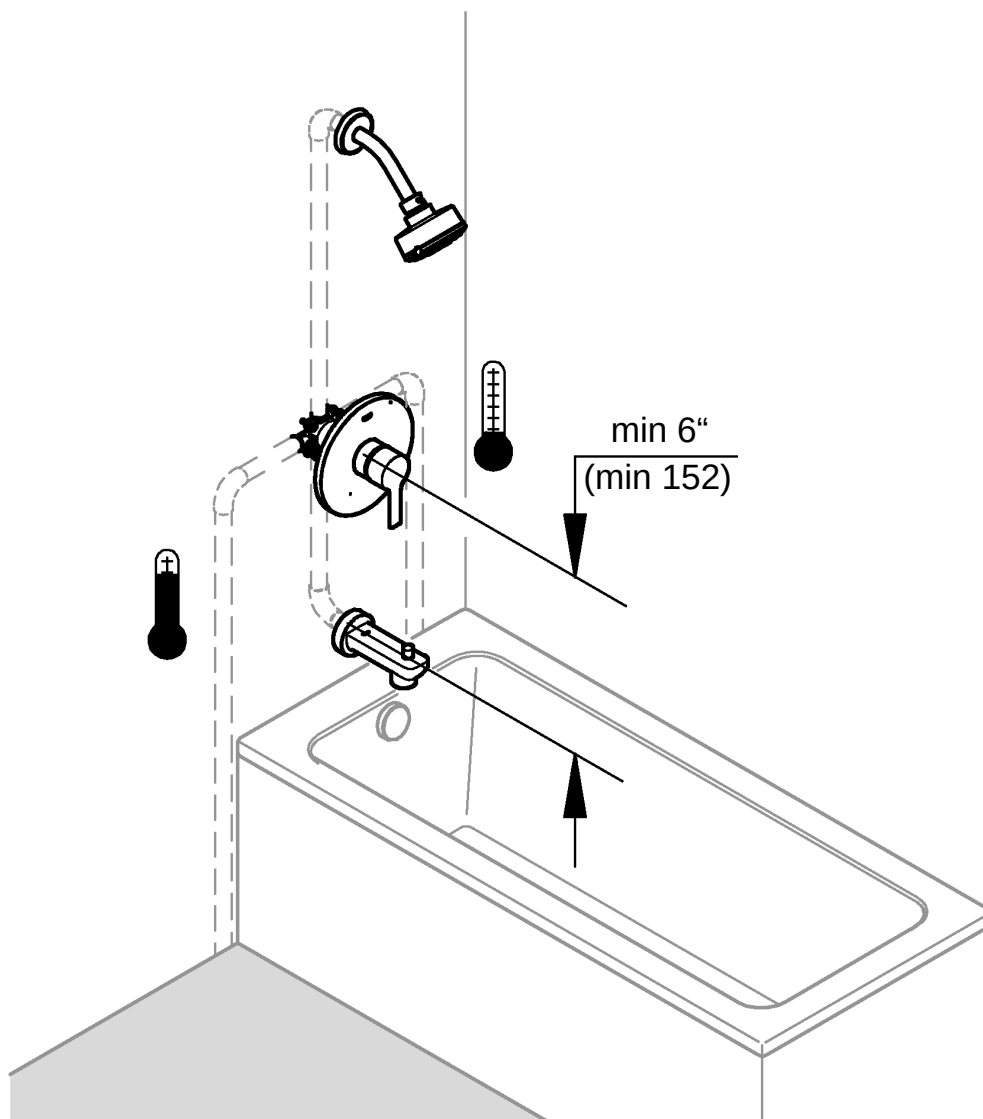





1

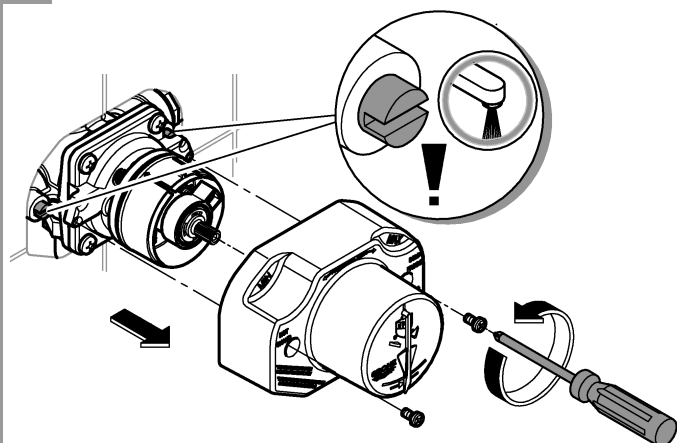


2

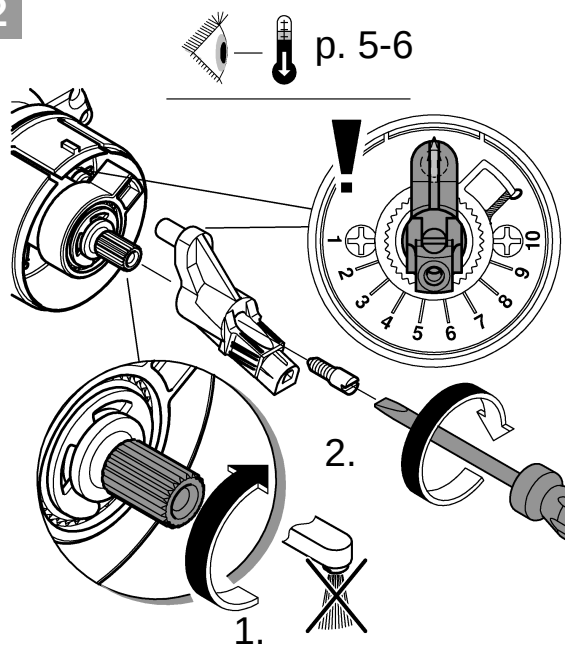

3

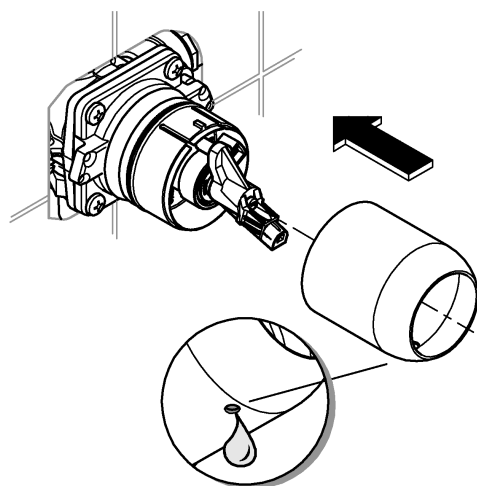


4

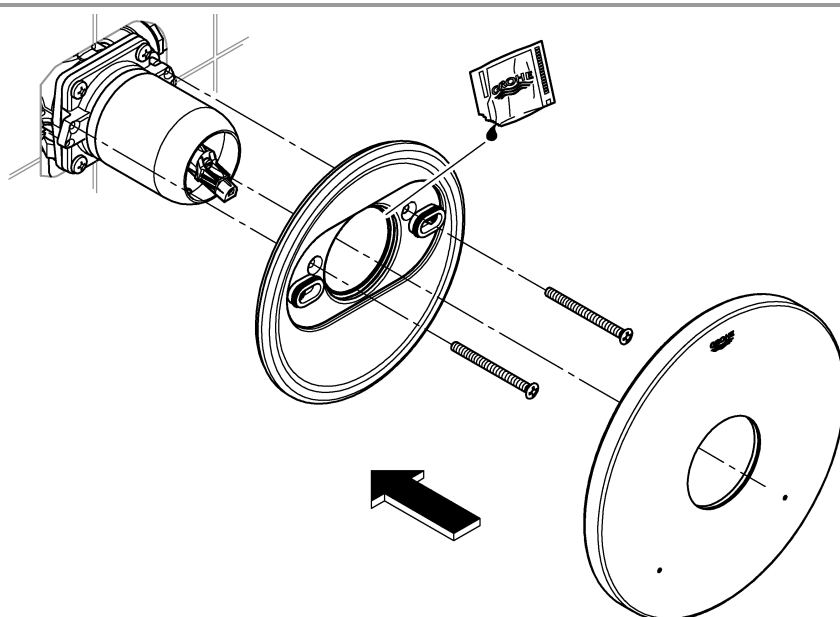




5

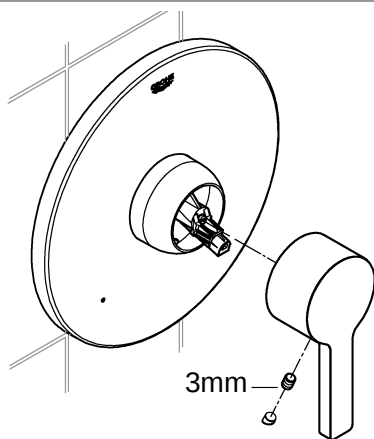

6

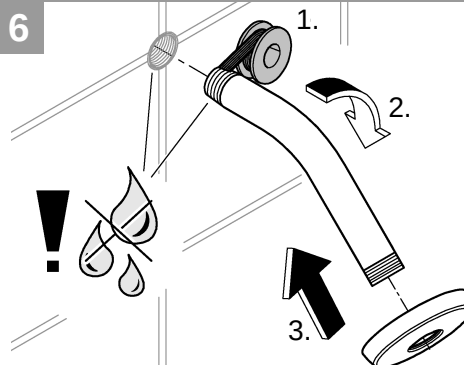


Only for 23 826
and 35095



Seulement pour
23 826 et 35095

Sólo para 23 826
y 35095


7

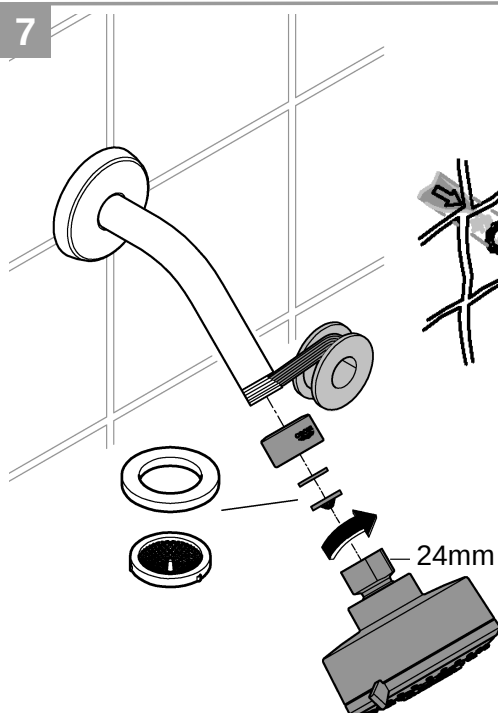

8

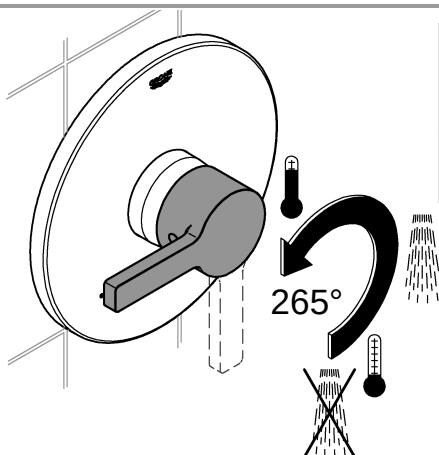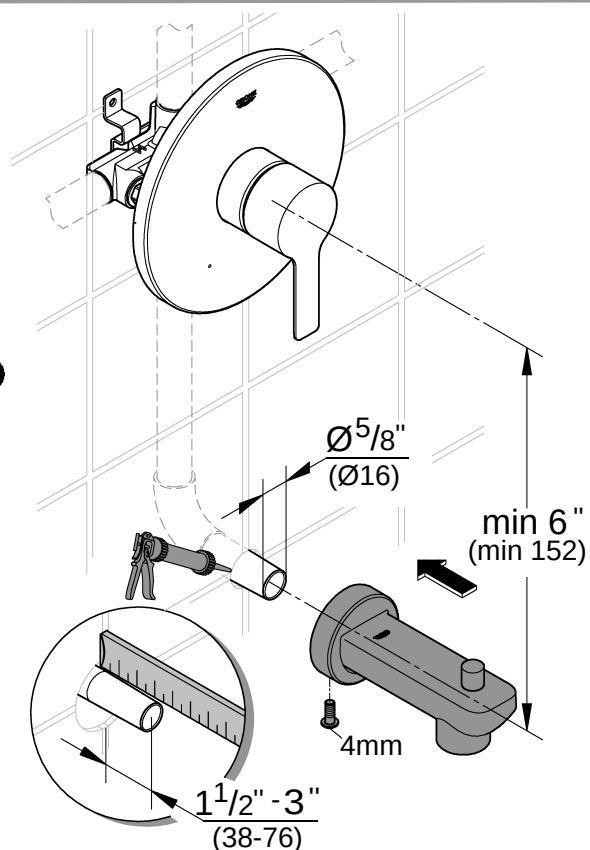

3 bar:	43 psi:
15 l/min	4.0 gpm

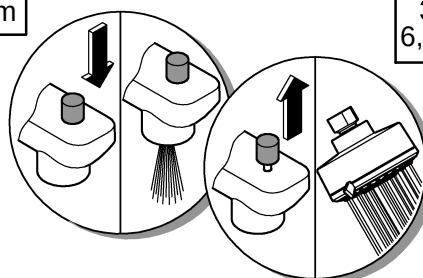

3 bar:	43 psi:
6,5 l/min	1,7 gpm




2




2.

3

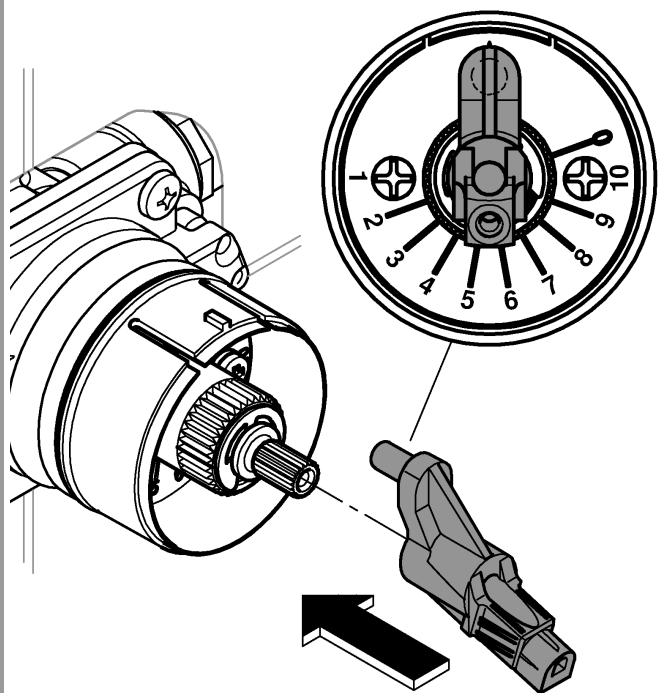




4

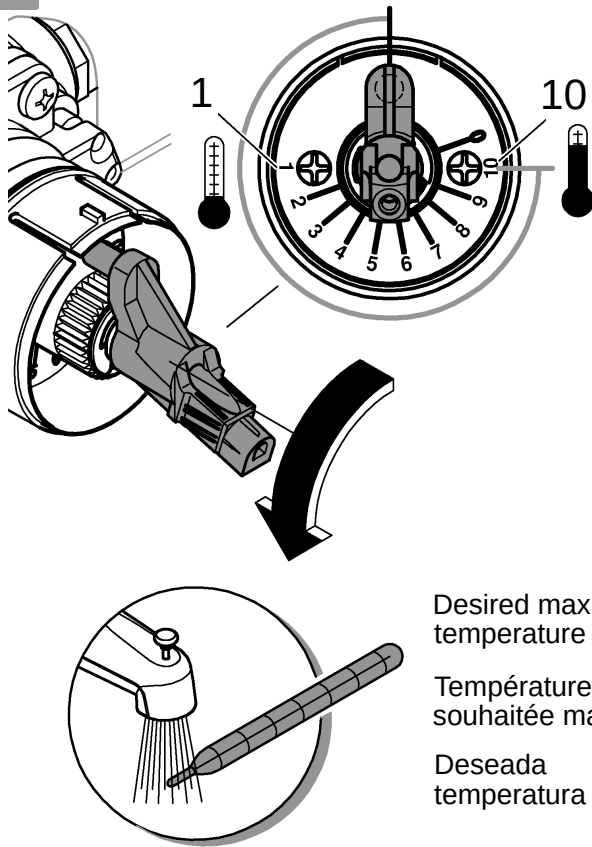


Desired max.
temperature
Température
souhaitée max.
Deseada
temperatura max.


5

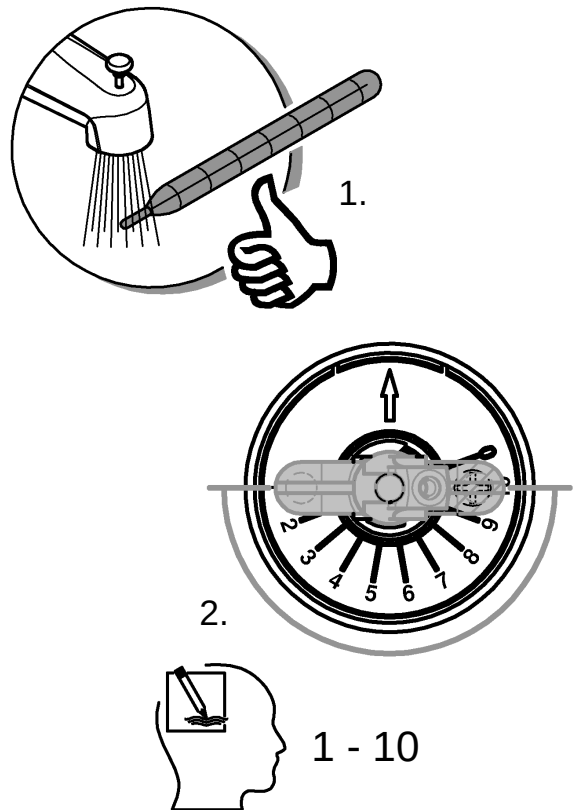


6

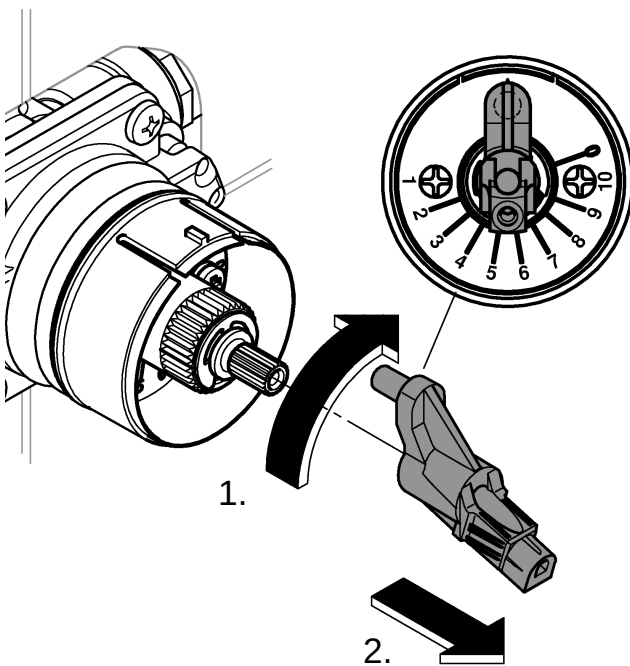


7

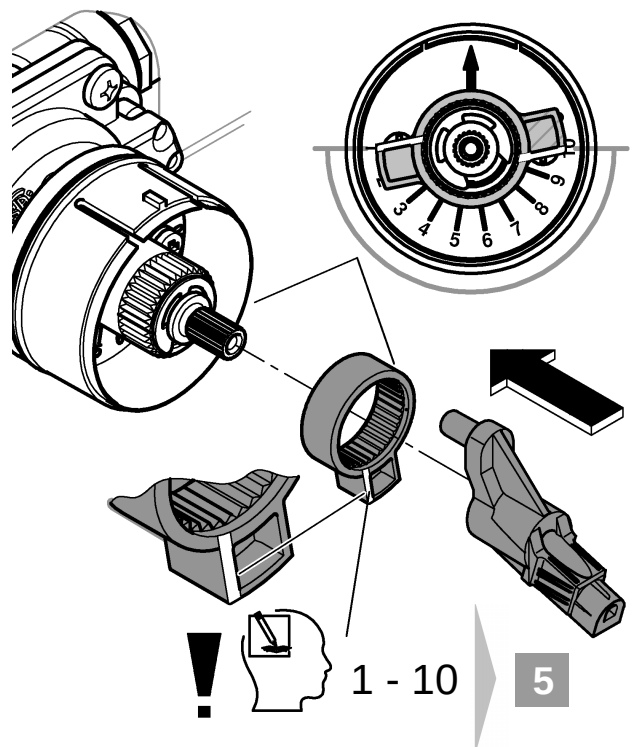




Quick descaling
Détartrage rapide
Descalcificación rápida


1

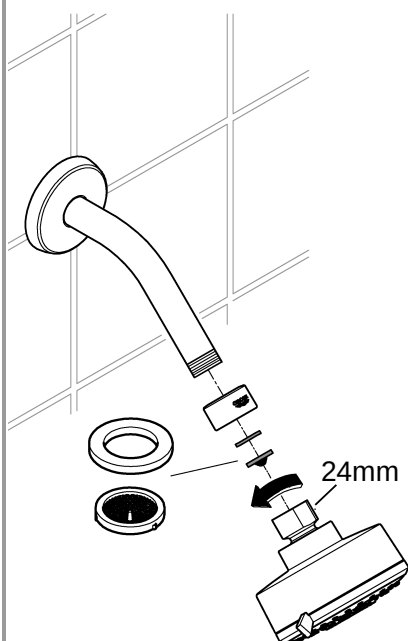


2

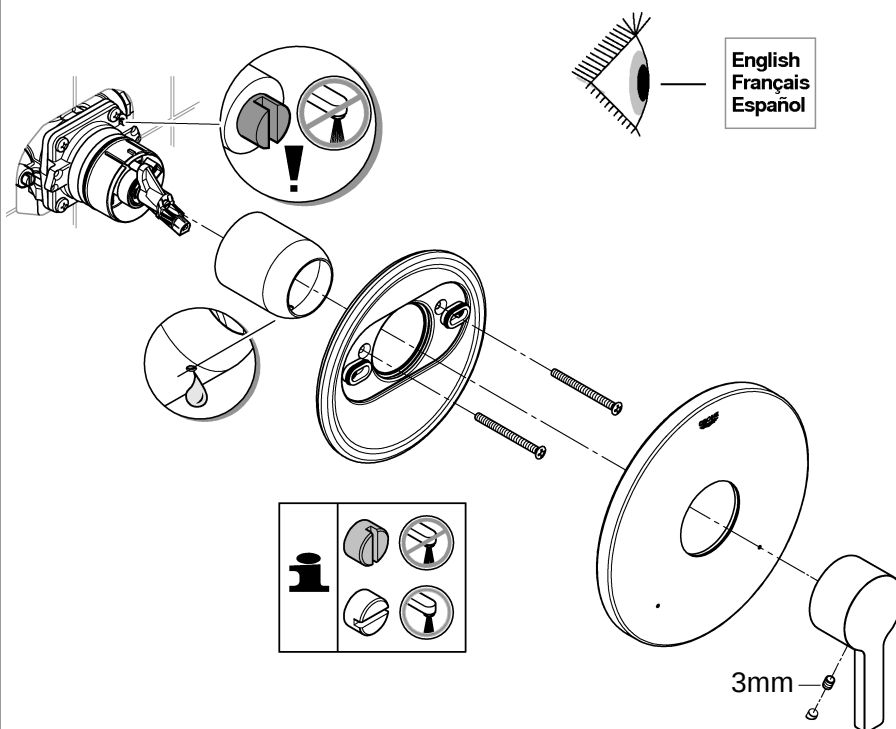


3

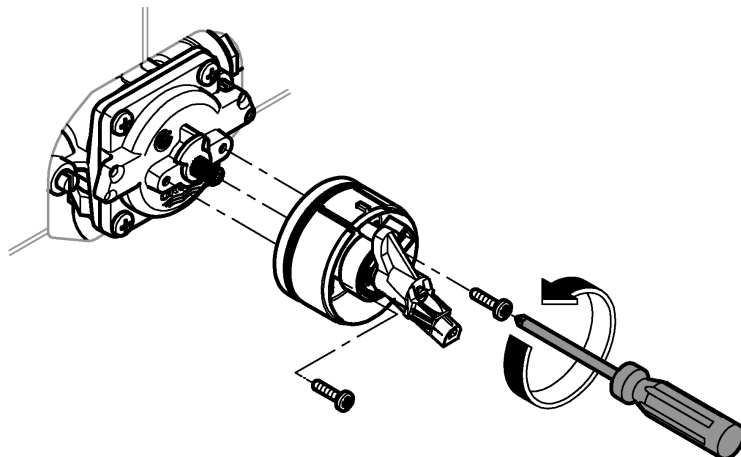

4

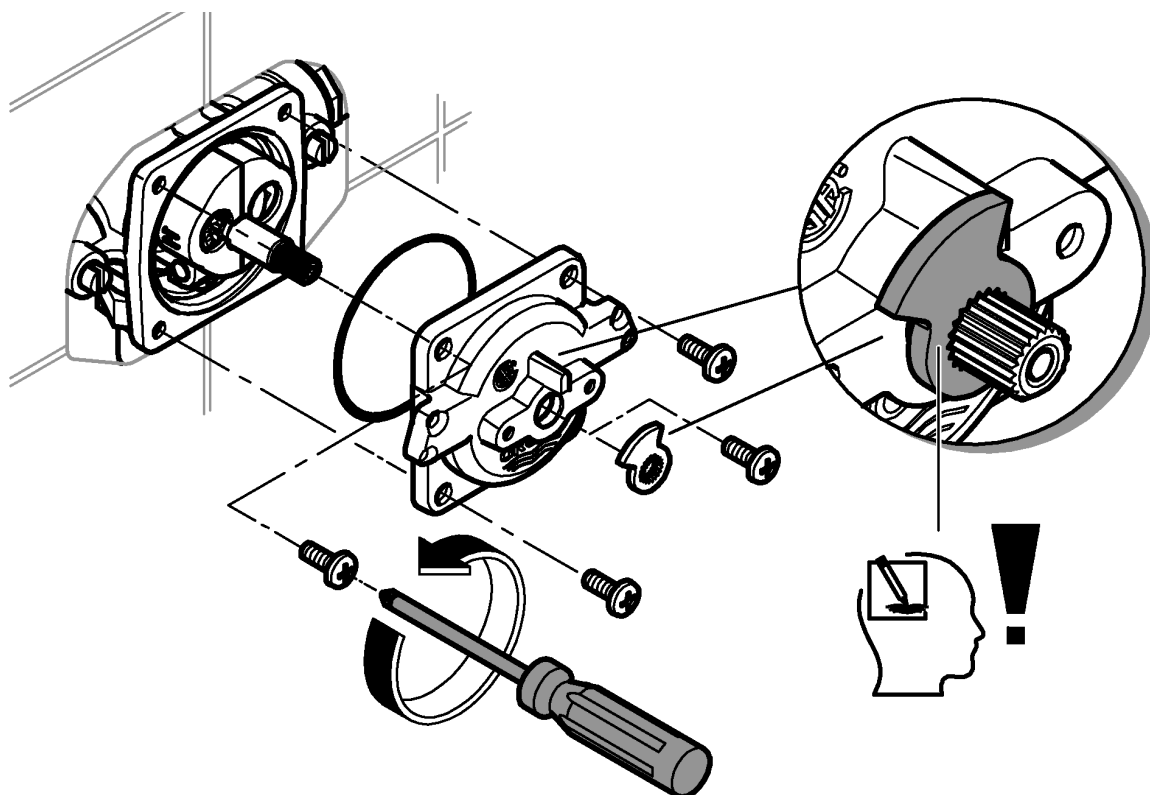


5

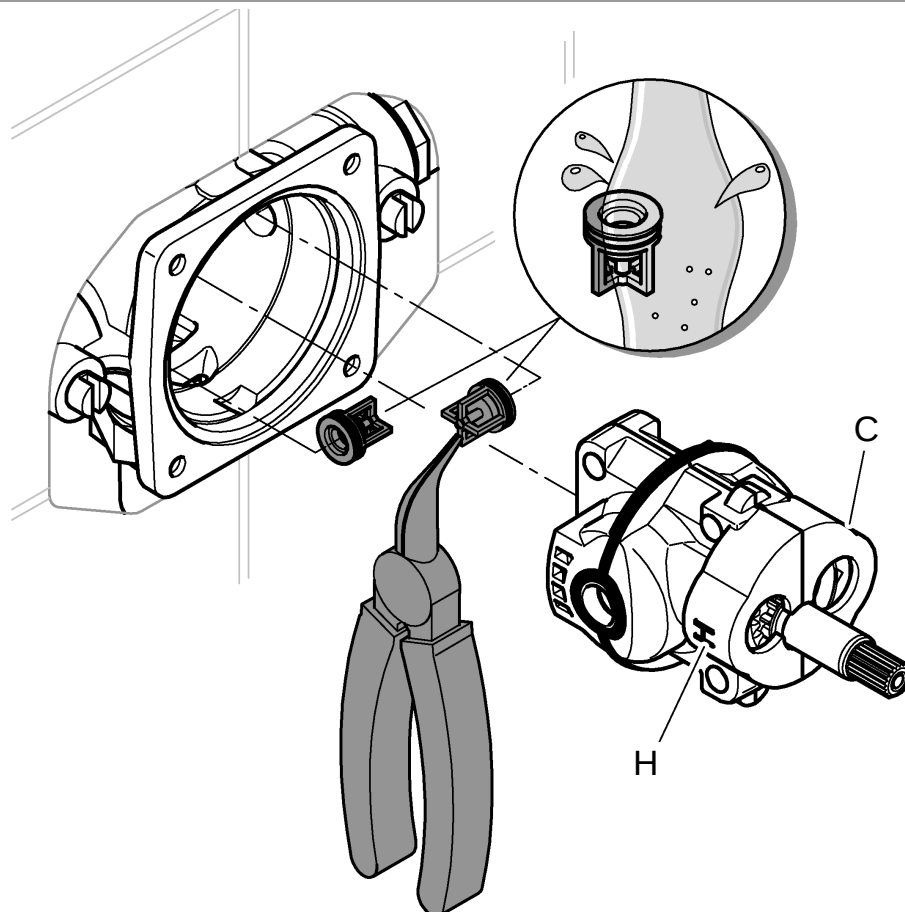



35 015

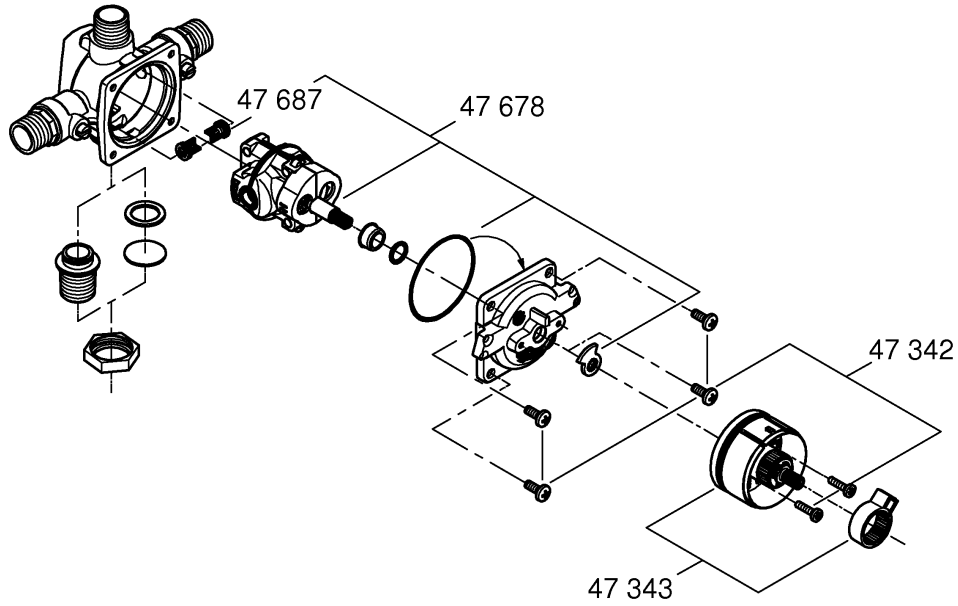

29 167

