

# BarnDoorTrack

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.

**CS BarnDoorTrack** is suitable for surface sliding applications where there is enough strength in the wall to side mount a track above an opening.

Installation is quick and easy as the track bracket is supplied with pre-machined fixing slots. The track is pre-finished black anodized and supplied with fixing bracket, stops, door hangers and T-Guide.




*CS BarnDoorTrack and door hangers*

*CS BarnDoorTrack with black anodized finish.*

 TrackSystems

## Technical Information

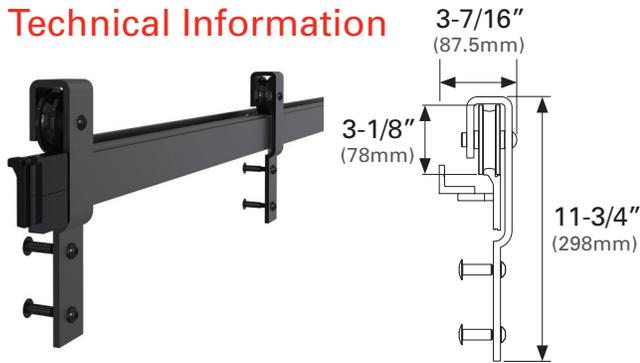

<b>Track Finish:</b>	Black Anodized	
<b>Max. Door Weight</b> (per track):	300kg	650lb
<b>Max. Door Weight</b> (SofStop):	100kg	220lb
<b>Min. Door Thickness:</b>	32mm	1-1/4"

## Design Features & Options

- Track is high-quality, heavy duty extruded aluminum.
- Black Anodized finish.
- Track can be easily adjusted to allow for different wall clearances with baseboard & moulding.
- No exposed fasteners gives a clean look.
- Ultra smooth running acetal wheels.
- Pre-machined mounting holes at 12" centers. Additional holes can be drilled on site to match studs.
- Anti-jump system ensures wheels cannot jump off the track.
- Maximum weight per track: 650lb (300kg) (see installation notes).
- SofStop® 220lb soft close / soft open kit available (suitable for retrofit).



## Installation Notes

The stud wall must be level and solid enough to support the door weight. This track is supplied with coach screws suitable for use with timber framing. For fixing to concrete walls, masonry anchors must be used.


### Determine overall thickness

This track system is supplied with either a Narrow or Wide track bracket which must be specified at time of order. The bracket can be adjusted to suit an overall thickness of door + gap + moulding of:

1-5/8" to 2-3/8" (40 - 61mm)(**Narrow** option) or  
2-3/8" to 3-1/8" (62 - 80mm)(**Wide** option).



## Fixing Detail

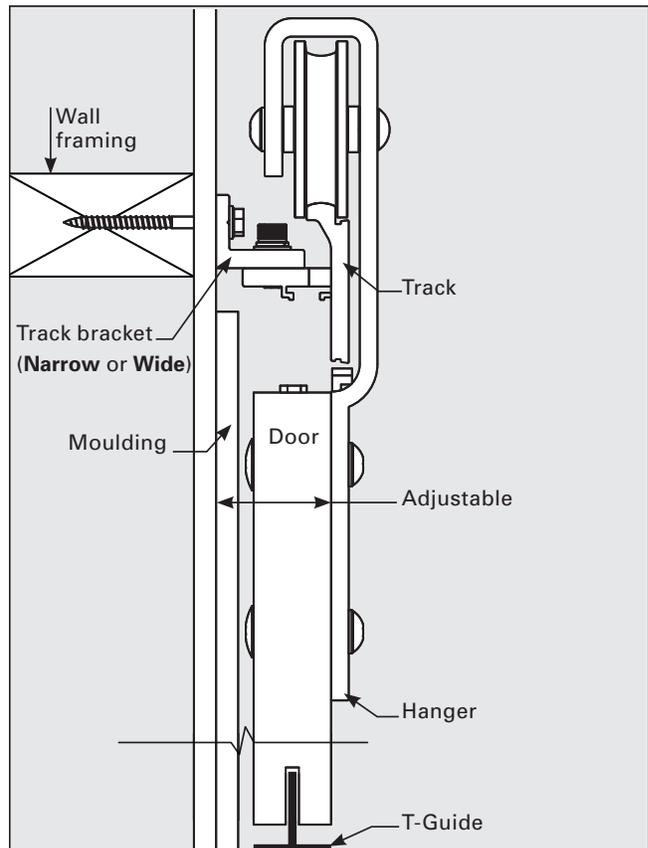

## How to Order

- 1. Specify track length**  
(available in 5, 6, 7, 8, 10 and 12' pre-cut lengths)
- 2. Choose Narrow or Wide bracket**
- 3. Select hanger packs** (one pack per door)
- 4. Select SofStop packs**  
(2 packs required for soft open & close.  
Max. door weight 220lb)