

PDQ-O LED

24V DC Strip Lighting

Wet Location / Outdoor

PDQ-H-O High Output

PDQ-S-O Standard Output

LEDs

- **High-output**
Warm White: 2,800°K ±100°K, CRI 70, 225 lm per foot
Natural White: 4,100°K ±100°K, CRI 65, 235 lm per foot
- **Standard-output**
Warm White: 2,800°K ±100°K, CRI 70, 125 lm per foot
Natural White: 4,100°K ±100°K, CRI 65, 135 lm per foot


System

- 24VDC system, onboard constant-current driver:
High-output – 3.65W per foot
Standard-output – 2.30W per foot
- Dimmable with magnetic low-voltage (MLV) dimmer
- 20' max. run length
- Ultra-compact strip
- Available in 5' and 20' lengths
- 5' power feeds included with 5' lengths; 10' power feeds included with 20' lengths
- Field-cutttable with convenient markings every 4 inches
- Stainless steel mounting clips available
- UL/C-UL Listed for wet location (IP67)



24VDC, High-output LEDs

<input type="checkbox"/>	PDQ24-H-O-20-WW	Warm White High-output LED (2,800°K ±100K), CRI 70	20'
<input type="checkbox"/>	PDQ24-H-O-20-NW	Natural White High-output LED (4,100°K ±100K), CRI 65	20'
<input type="checkbox"/>	PDQ24-H-O-5-WW	Warm White High-output LED (2,800°K ±100K), CRI 70	5'
<input type="checkbox"/>	PDQ24-H-O-5-NW	Natural White High-output LED (4,100°K ±100K), CRI 65	5'

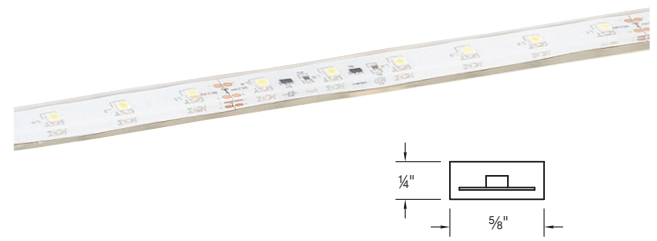

24VDC, Standard-output LEDs

<input type="checkbox"/>	PDQ24-S-O-20-WW	Warm White Standard-output LED (2,800°K ±100K), CRI 70	20'
<input type="checkbox"/>	PDQ24-S-O-20-NW	Natural White Standard-output LED (4,100°K ±100K), CRI 65	20'
<input type="checkbox"/>	PDQ24-S-O-5-WW	Warm White Standard-output LED (2,800°K ±100K), CRI 70	5'
<input type="checkbox"/>	PDQ24-S-O-5-NW	Natural White Standard-output LED (4,100°K ±100K), CRI 65	5'

Project _____

Fixture Type _____

Location _____

Contact _____

Phone _____



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue City of Industry CA 91744 Tel: 626.336.4511 Fax: 626.330.4266 www.csllighting.com

PDQ-O LED Accessories

System

- 24VDC system, onboard constant-current driver:
High-output – 3.65W per foot
Standard-output – 2.30W per foot
- Dimmable with magnetic low-voltage (MLV) dimmer
- 20' max. run length
- Ultra-compact strip
- Available in 5' and 20' lengths
- 5' power feeds included with 5' lengths; 10' power feeds included with 20' lengths
- Field-cutttable with convenient markings every 4 inches
- Stainless steel mounting clips available
- UL/C-UL Listed for wet location (IP67)



PDQ LED Outdoor Dimmable LED Drivers

24VDC

<input type="checkbox"/>	D-133	20W Mag	24V	E.I. magnetic	5" x 2¼" x 2"	4 lbs
<input type="checkbox"/>	D-134	40W Mag	24V	E.I. magnetic	5" x 2¼" x 2"	4 lbs
<input type="checkbox"/>	D-135	60W Mag	24V	E.I. magnetic	6" x 2⅝" x 2¼"	4 lbs
<input type="checkbox"/>	D-136	100W Mag	24V	E.I. magnetic	6" x 2⅝" x 2¼"	5 lbs
<input type="checkbox"/>	D-137	150W Mag	24V	E.I. magnetic	7½" x 3" x 3"	7 lbs

Stainless Steel Mounting Clip

- | | | |
|--------------------------|----------------|-------------------------------|
| <input type="checkbox"/> | PDQ-OD-SS-CLIP | Stainless steel mounting clip |
|--------------------------|----------------|-------------------------------|



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue City of Industry CA 91744 Tel: 626.336.4511 Fax: 626.330.4266 www.csllighting.com