


# 12V LED HARDSCAPE, DECK, STEP & BENCH


## 6 LED FIXTURE WITH BRACKET

**15746 AZT**  
12.9" Length

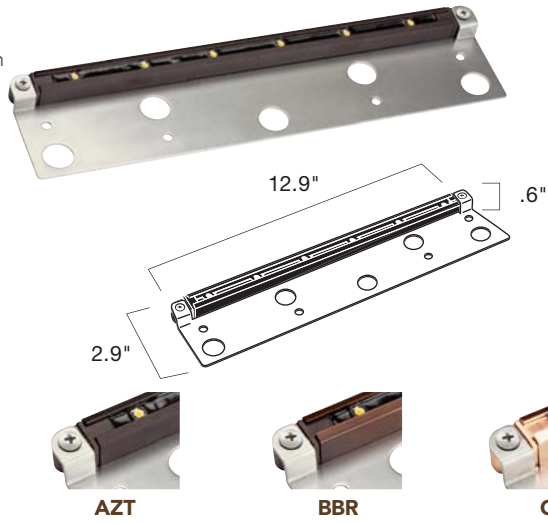

## 9 LED FIXTURE WITH BRACKET

**15756 GRY**  
18.9" Length

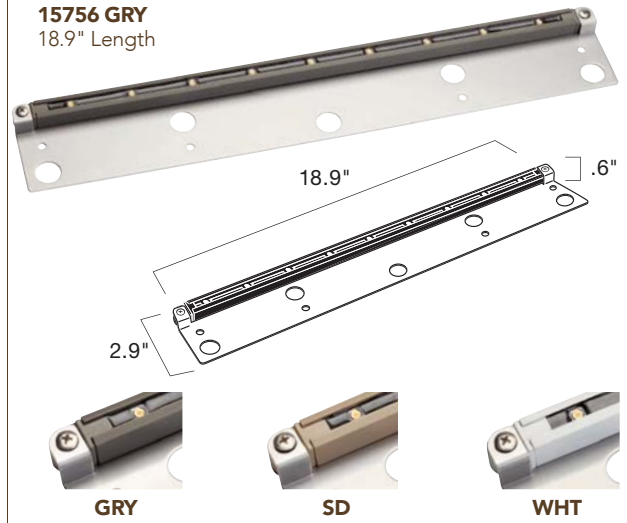

### 15746

### 15756

Ordering Guide	2700K Warm White	3000K Pure White	2700K Warm White	3000K Pure White
	15746 AZT27, 15746 BBR27, 15746 CO27, 15744 GRY27, 15746 SD27, 15744 WHT27	15746 AZT30, 15744 BBR30, 15746 CO30, 15744 GRY30, 15746 SD30, 15744 WHT30	15756 AZT27, 15756 BBR27, 15756 CO27, 15756 GRY27, 15756 SD27, 15756 WHT27	15756 AZT30, 15756 BBR30, 15756 CO30, 15756 GRY30, 15756 SD30, 15756 WHT30
Housing	Cast Aluminum, Cast Brass, Copper Plated Brass		Cast Aluminum, Cast Brass, Copper Plated Brass	
Light Source	6 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver		9 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver	
Beam Spread	55°		55°	
Color Temp. (CCT) & CRI	2700K (-280/+0) / 80s CRI 3000K (-200/+175) / 80s CRI		2700K (-280/+0) / 80s CRI 3000K (-200/+175) / 80s CRI	
Power Usage at 12V AC Input VA and Watts	1.4 W, 2.4 VA		2.2 W, 3.7 VA	
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology		9V-15V AC/DC with no loss in output due to constant current technology	
Lumen Maint.	Tested to an L-70 of 40,000 hours		Tested to an L-70 of 40,000 hours	
Delivered Lumens & Efficacy	2700K = 69.5 Lm 2700K = 49 Lm/W	3000K = 88 Lm 3000K = 63 Lm/W	2700K = 104.2 Lm 2700K = 47 Lm/W	3000K = 132 Lm 3000K = 60 Lm/W
Wiring	70" of usable #18-2, SPT-1W leads. Wire connectors supplied.		70" of usable #18-2, SPT-1W leads. Wire connectors supplied.	
Mounting Access. (Included)	Stainless steel masonry bracket and mounting screws		Stainless steel masonry bracket and mounting screws	
Optional	15718 SS – 6 LED Accessory Bracket		15719 SS – 9 LED Accessory Bracket	
Notes	Copper and brass will naturally patina over time		Copper and brass will naturally patina over time	
Fixture Photometric (fc)*	Mounting Height	0' 1' 2' 3' 4'	Mounting Height	0' 1' 2' 3' 4'
	Foot Candles at 12"	65.10 9.74 0.60 0.22 0.14	Foot Candles at 12"	80.40 12.00 1.08 0.36 0.21
	Foot Candles at 24"	19.64 9.15 2.72 0.48 0.24	Foot Candles at 24"	26.81 13.13 3.81 0.91 0.39
	Foot Candles at 36"	9.16 5.82 2.74 1.00 0.30	Foot Candles at 36"	13.51 8.43 4.55 1.78 0.62

\*Values stated for 3000K. -10% for 2700K.