



# Ar Ruthiane


Designed in 2004


shown in Polished Copper with wood blades



- 

Safety cages available for low ceilings.
- 

Suitable for Damp Location \*\*
- 

Compatible with Downrod Light Canopy
- 

USA made components



shown in Polished Chrome with metal blades and decorative cage

The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate about its teardrop center. The motor heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both motor head position and fan blade speed.

- Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans.
- Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.
- Each unique motor mount and fan head knob is made of genuine marbled Bakelite.
- The Ar Ruthiane is available with the following blade options:
  - metal blades with decorative metal blade guards
  - solid, ecologically harvested Brazilian mahogany blades without blade guards
  - metal blades with metal safety cages for use in low ceiling applications (7 ft in US / 8.2 ft in Canada)

Standard Finishes

black	bronze (plate)	bronzette (powdercoat)	brushed brass	black nickel	light blue	dark blue	light purple	yellow
brushed nickel	polished chrome	polished copper	brushed copper	polished brass	light green	dark green	orange	red
			white					

Special Order Finishes

# MATTHEWS


FAN COMPANY

www.matthewsfanco.com



## Ar Ruthiane

weight: 21 lbs  
voltage: 110\*

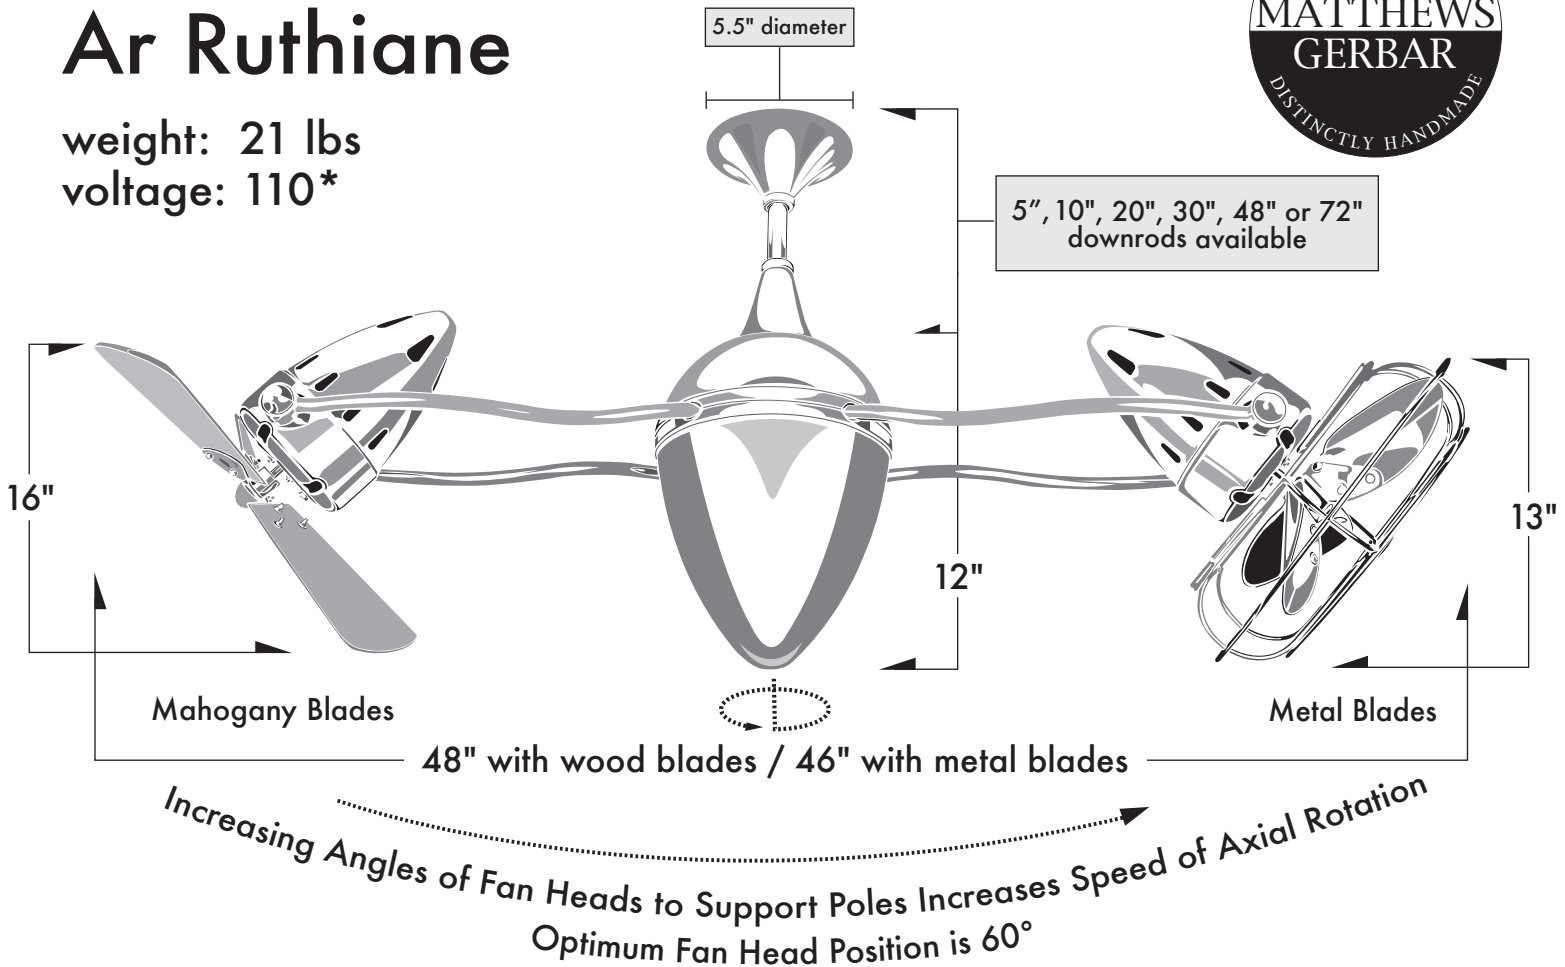

CFM: 6174  
(Wood Blades)

CFM: 4994  
(Metal Blades)

The Ar Ruthiane can be mounted with any one of the following downrod lengths: 5, 10, 20, 30, 48 or 72".

- The downrods can be easily field cut; they are not threaded.

The Ar Ruthiane is compatible with flat or vaulted ceiling canopies.

All fans best regulated by variable speed wall controls.

Metal bladed fans with protective powder or clear coatings are suitable for Damp Location.

Safety cages available for low ceiling applications.

\*Please contact us for possible 220V conversions

\*\*Damp location with powder or clear coat only.

Not recommended for salt water / ocean front applications.



\*\*Damp Location