

INSTALLATION INSTRUCTIONS

Model # 8717 / 8718

READ AND SAVE THESE INSTRUCTIONS


WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. For 8718: Remove cage (J) by unscrewing the cap nut (I), then open the package softly and carefully insert the glass panels into the cage from the top. (Fig.1)
4. Thread the two studs (B) into the pre-drilled holes in the circular strap (C) spaced the same distance apart as the holes in the back plate (H), then tighten with the nuts (E). The length of studs (B) into circular strap (C) may be adjusted if necessary.
5. Attach circular strap (C) using outlet box screws (F) to the outlet box (A), (Fig 1).


Fig. 1

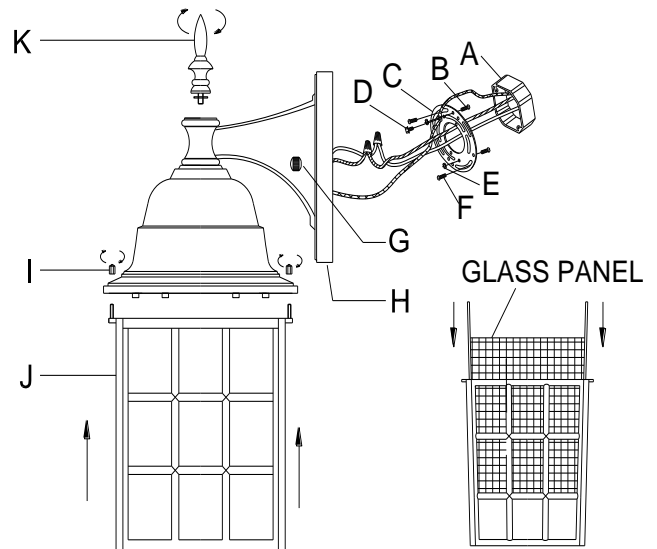

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw (D) provided.

Fig.2

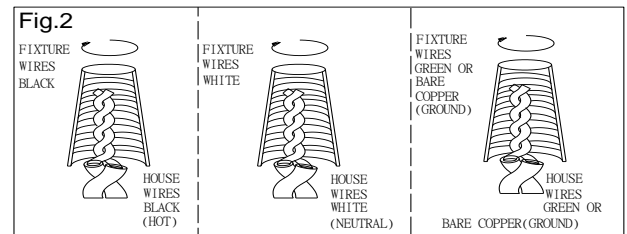

COMPLETING THE INSTALLATION (Fig. 1)

7. To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone Sealant to outline the outside of fixture back plate (H) where it meets the wall leaving a space at bottom to allow moisture a means to escape.
8. Align back plate (H) onto studs (B) and secure with cap nuts (G). (Fig 1)
9. At this point, install the light bulbs in accordance with the fixture specification – **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Align cage (J) with the glass to the top cover and secure with the cap nuts (I). Attach top finial (K) as shown in Fig.1.

Your installation is now complete. Return power to the outlet box and test the fixture.



© Minka Lighting Inc.
This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION – RISQUE D’INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.